


# **PROBLEM SUMMARY**

### Area **ROTO XTEND DUTY** Machine Id **ATLAS COPCO API635726 - GEORGES CHICKEN** Component

Compressor

### COMPONENT CONDITION SUMMARY

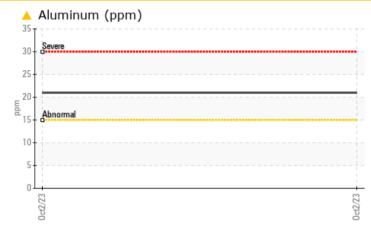

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ATTENTION						
Aluminum	ppm	ASTM D5185m	>15	<u> </u>						


Customer Id: UCTATRIC Sample No.: UCH05979859 Lab Number: 05979859 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

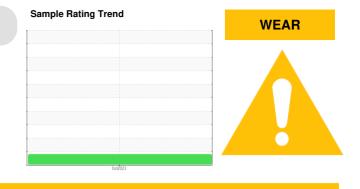

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

**Emulsified Water** 

Free Water

scalar

\*Visual

scalar \*Visual

>0.1

### ROTO XTEND DUTY **ATLAS COPCO API635726 - GEORG** Component

Compressor

### DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### A Wear

The aluminum level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

1515 REPU	RI					WEAR
ORGES CHIC	<b>KEN</b>					
				0ct2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH05979859		
Sample Date		Client Info		02 Oct 2023		
Machine Age	hrs	Client Info Client Info		5833		
Oil Age Oil Changed	hrs	Client Info		5833 Not Changd		
Sample Status		Chefit IIIIO		ATTENTION		
·						
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	. 15	0		
Aluminum Lead	ppm	ASTM D5185m ASTM D5185m	>15 >65	0		
Copper	ppm ppm	ASTM D5185m	>65	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
			in in base			
Boron	ppm	ASTM D5185m		0		
Barium Molybdenum	ppm	ASTM D5185m ASTM D5185m		0		
Manganese	ppm ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		147		
Zinc	ppm	ASTM D5185m		64		
Sulfur	ppm	ASTM D5185m		199		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon		ASTM D5185m		0		
Sodium	ppm ppm	ASTM D5185m	>35	3		
Potassium	ppm		>20	0		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.14	1.21		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		

Sample Rating Trend

WEAR

----

NEG

NEG

----



# **OIL ANALYSIS REPORT**



Contact/Location: JOE MYRICK - UCTATRIC