


PROBLEM SUMMARY

KAESER 2248872

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

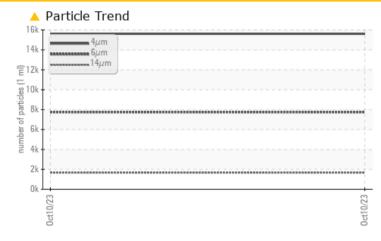

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBEEM/THO TEOTHEODETO									
Sample Status			ABNORMAL						
Particles >6µm	ASTM D7647	>1300	<u> </u>						
Particles >14µm	ASTM D7647	>80	🔺 1664						
Particles >21µm	ASTM D7647	>20	🔺 655						
Particles >38µm	ASTM D7647	>4	6 51						
Particles >71µm	ASTM D7647	>3	6						
Oil Cleanliness	ISO 4406 (c)	>/17/13	 21/20/18						


Customer Id: GABBLO Sample No.: KC126037 Lab Number: 05981234 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

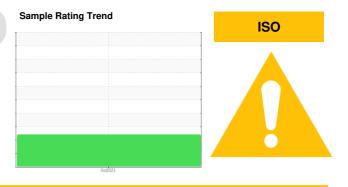

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

Machine Id KAESER 2248872 Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM		method	limit/base	ourroat	biotomit	history 0
SAMPLE INFORM			limit/base	current	history1	history2
Sample Number		Client Info		KC126037		
Sample Date		Client Info		10 Oct 2023		
Machine Age	hrs	Client Info		18605		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	56		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		0		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m	>25	0		
	ppm	ASTM D5185m	>20	21		
Sodium	ppm		>20			
Potassium	ppm	ASTM D5185m		1		
Water Water	%	ASTM D6304	>0.05	0.019		
ppm Water	ppm	ASTM D6304	>500	197.3		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15616		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	<mark>人</mark> 51		
Particles >71µm		ASTM D7647	>3	<u> </u>		
Oil Cleanliness		ISO 4406 (c)	>/17/13	1/20/18		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37		


Report Id: GABBLO [WUSCAR] 05981234 (Generated: 10/19/2023 10:34:33) Rev: 1




OIL ANALYSIS REPORT

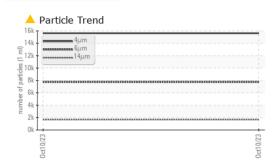

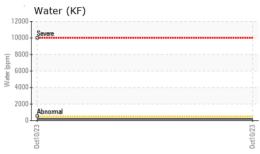

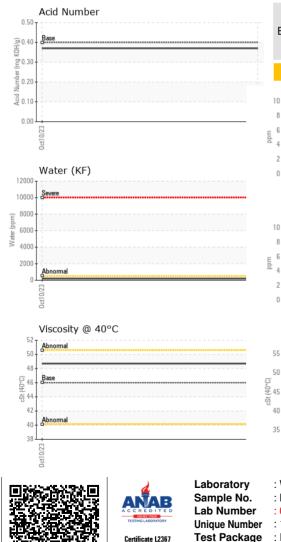

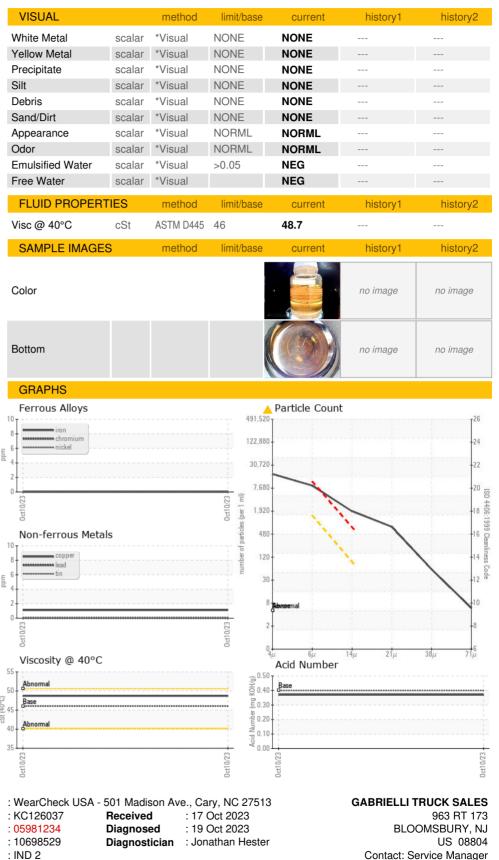

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)