


OIL ANALYSIS REPORT



Area
[W47346]
Machine Id
JOHN DEERE 824K 1DW824KXTHF680767
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

Sample Rating Trend

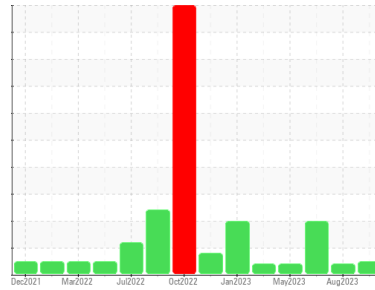

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0180408	JR0180151	JR0165428
Sample Date	Client Info		16 Oct 2023	30 Aug 2023	09 Jun 2023
Machine Age	hrs	Client Info	8567	8140	7459
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	15	13	10
Chromium	ppm	ASTM D5185m >11	1	2	1
Nickel	ppm	ASTM D5185m >5	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >31	15	15	10
Lead	ppm	ASTM D5185m >26	2	4	1
Copper	ppm	ASTM D5185m >26	2	<1	2
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	214	139	297
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	243	210	304
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	769	719	990
Calcium	ppm	ASTM D5185m	1403	1257	1672
Phosphorus	ppm	ASTM D5185m	880	713	1107
Zinc	ppm	ASTM D5185m	1041	912	1298
Sulfur	ppm	ASTM D5185m	3013	3157	4161

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >22	7	5	8
Sodium	ppm	ASTM D5185m >31	4	2	3
Potassium	ppm	ASTM D5185m >20	8	6	7
Fuel	%	ASTM D3524 >8.0	3.9	5.1	▲ 3.7




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.2	0
Nitration	Abs/cm	*ASTM D7624 >20	8.5	9.0	5.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.3	22.5	16.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.9	16.7	10.3
Base Number (BN)	mg KOH/g	ASTM D2896 13.6	7.9	7.8	▲ 3.3





OIL ANALYSIS REPORT

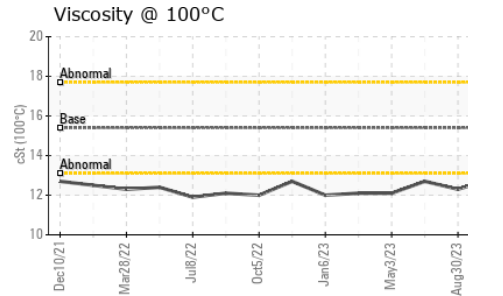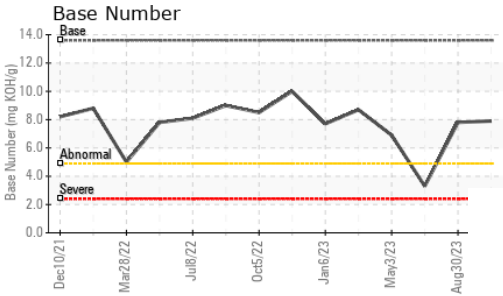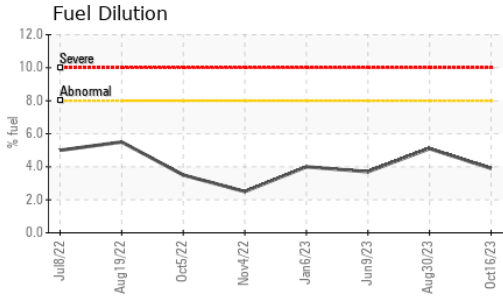

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	▲ 12.3	12.7

GRAPHS

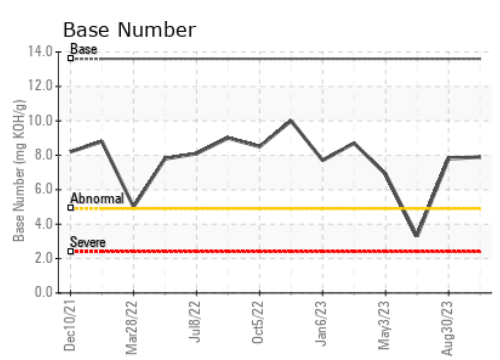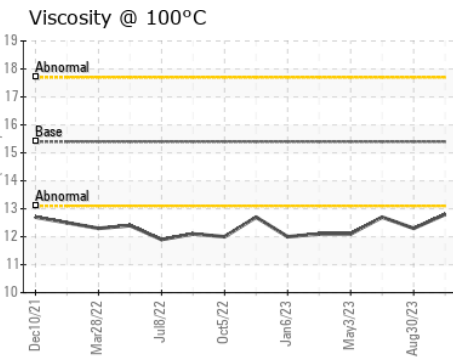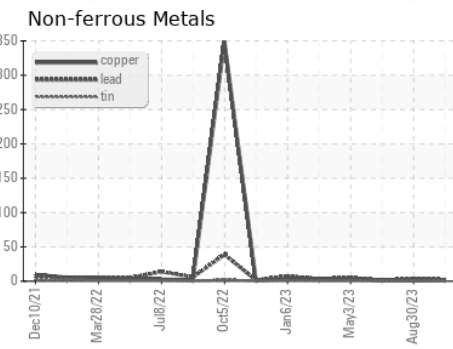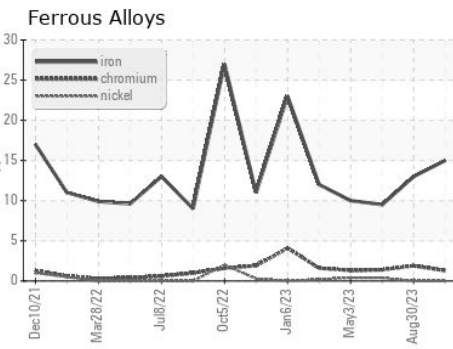

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0180408 **Received** : 18 Oct 2023
Lab Number : 05982260 **Diagnosed** : 24 Oct 2023
Unique Number : 10699555 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292