




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

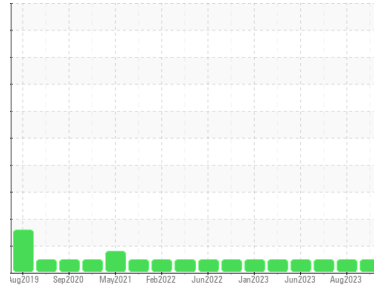

Machine Id
JLG 1255 016-0118 (S/N 0160086959)

Component
Front Left Final Drive

Fluid
SCHAEFFER SCHAEFFER 293 MOLY 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0868332	WC0815024	WC0815053
Sample Date	Client Info		27 Oct 2023	15 Aug 2023	31 Jul 2023
Machine Age	hrs	Client Info	11871	11041	10881
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	52	106	99
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	<1	3	0
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >50	2	5	6
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	7	9	6
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	276	283	283
Manganese	ppm	ASTM D5185m	1	5	4
Magnesium	ppm	ASTM D5185m	10	1	0
Calcium	ppm	ASTM D5185m	66	97	67
Phosphorus	ppm	ASTM D5185m	461	548	520
Zinc	ppm	ASTM D5185m	56	50	36
Sulfur	ppm	ASTM D5185m	12203	15292	13921

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	4	6	7
Sodium	ppm	ASTM D5185m	1	<1	<1
Potassium	ppm	ASTM D5185m >20	<1	0	0

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	113	97.7	97.6






OIL ANALYSIS REPORT

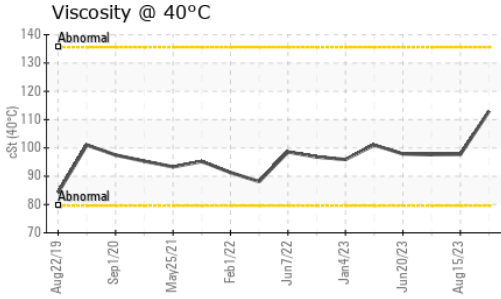

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

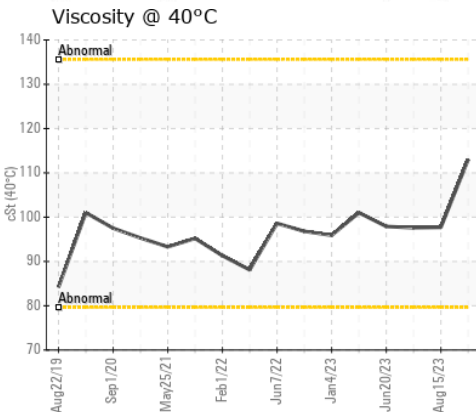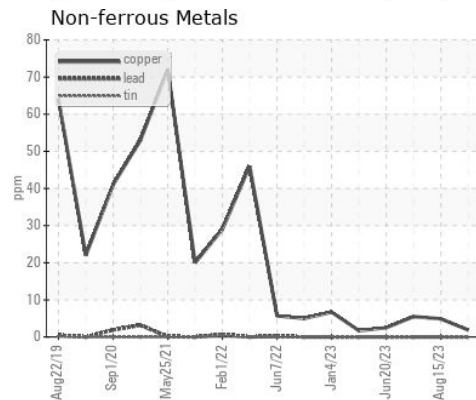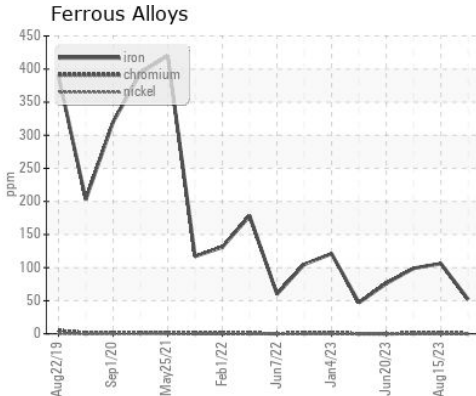

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868332
Lab Number : 06000138
Unique Number : 10728498
Test Package : CONST

Received : 06 Nov 2023
Diagnosed : 08 Nov 2023
Diagnostician : Sean Felton

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: