




PROBLEM SUMMARY


Area
WCLSNC
 Machine Id
QC230801HY
 Component
Hydraulic System
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

Sample Rating Trend

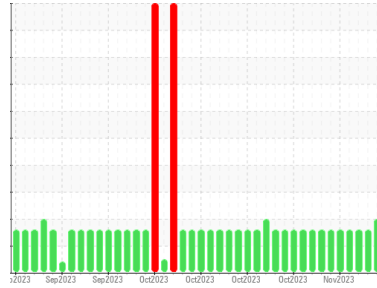

COMPONENT CONDITION SUMMARY

▲ Particle Trend

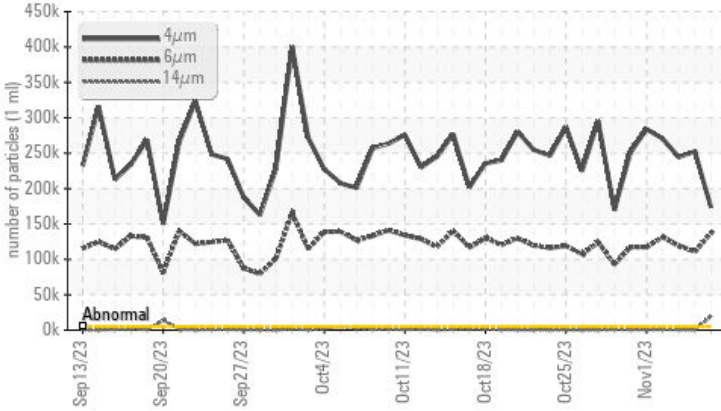

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>5000	▲ 173633	▲ 252537	▲ 244500
Particles >6µm	ASTM D7647	>1300	▲ 137290	▲ 110783	▲ 119291
Particles >14µm	ASTM D7647	>160	▲ 19912	▲ 380	▲ 724
Particles >21µm	ASTM D7647	>40	▲ 1497	10	17
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 25/24/21	▲ 25/24/16	▲ 25/24/17

Customer Id: WEACARQA
 Sample No.: WC0877792
 Lab Number: 06000490
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

06 Nov 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



03 Nov 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



02 Nov 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

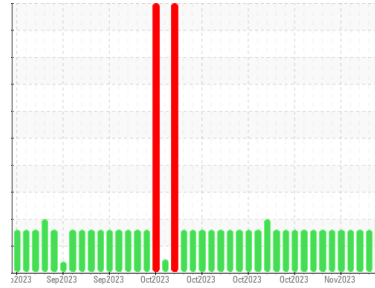

ISO



Area
WCLSNC
Machine Id
QC230801HY
Component
Hydraulic System
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0877792	WC0877791	WC0877788
Sample Date	Client Info	07 Nov 2023	06 Nov 2023	03 Nov 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2		
PQ	ASTM D8184	>47	57	32	12	
Iron	ppm	ASTM D5185m	>78	82	58	58
Chromium	ppm	ASTM D5185m	>2	1	0	<1
Nickel	ppm	ASTM D5185m	>3	2	<1	1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>5	3	1	2
Lead	ppm	ASTM D5185m	>11	10	8	9
Copper	ppm	ASTM D5185m	>84	75	80	73
Tin	ppm	ASTM D5185m	>4	4	1	3
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	6	96	96	91
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		21	16	16
Magnesium	ppm	ASTM D5185m	145	23	17	22
Calcium	ppm	ASTM D5185m	3570	3269	3248	3274
Phosphorus	ppm	ASTM D5185m	1290	1130	1052	1055
Zinc	ppm	ASTM D5185m	1640	1304	1251	1305
Sulfur	ppm	ASTM D5185m		3005	2883	3017

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>11	10	8	9
Sodium	ppm	ASTM D5185m	>23	19	19	17
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.1669	0.043	0.063	0.042
ppm Water	ppm	ASTM D6304	>1669	435.6	630.3	424.8

FLUID CLEANLINESS






method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>5000	▲ 173633	▲ 252537	▲ 244500
Particles >6µm	ASTM D7647	>1300	▲ 137290	▲ 110783	▲ 119291
Particles >14µm	ASTM D7647	>160	▲ 19912	▲ 380	▲ 724
Particles >21µm	ASTM D7647	>40	▲ 1497	10	17
Particles >38µm	ASTM D7647	>10	6	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 25/24/21	▲ 25/24/16	▲ 25/24/17

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	0.89	0.96	0.95



OIL ANALYSIS REPORT

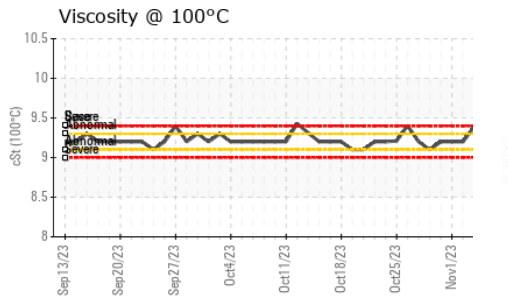
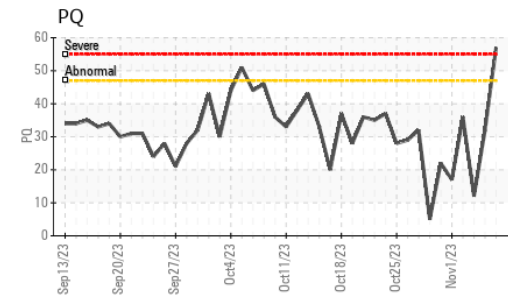
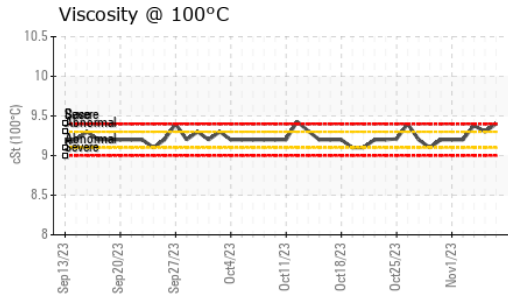
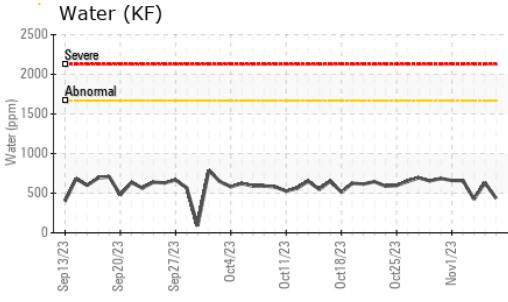
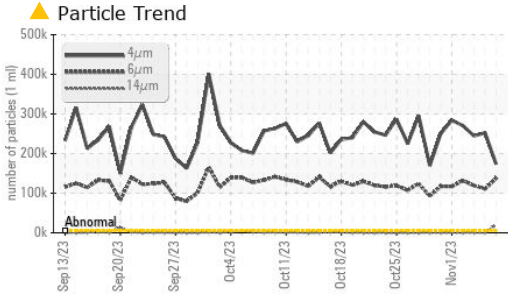


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1669	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	62.38	62.5
Visc @ 100°C	cSt	ASTM D445	9.4	9.4	9.3
Viscosity Index (VI)	Scale	ASTM D2270	147	130	127

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

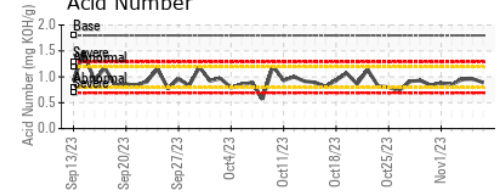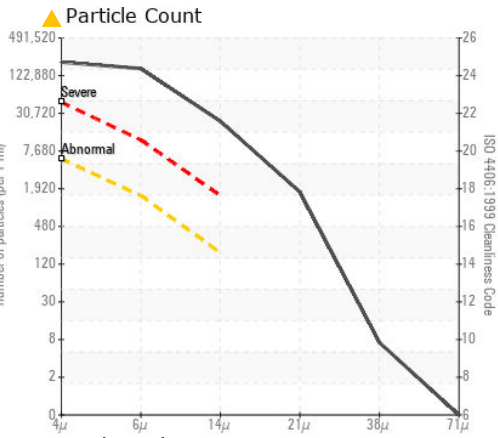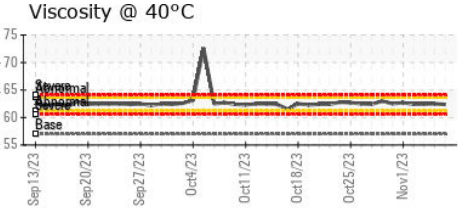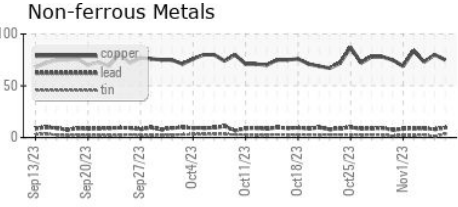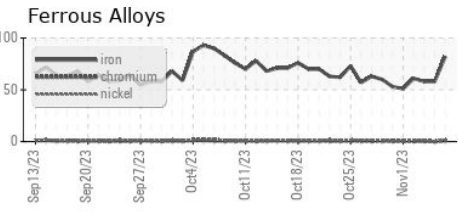

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0877792 **Received** : 07 Nov 2023
Lab Number : 06000490 **Diagnosed** : 14 Nov 2023
Unique Number : 10728850 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, VI)

WEARCHECK LUBRICATION SERVICES QA ACCOUNT
 501 Madison Ave
 Cary, NC
 US 27513
 Contact: WCLS CARY NC

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)379-4102
 F: (919)379-4050