




OIL ANALYSIS REPORT

Sample Rating Trend

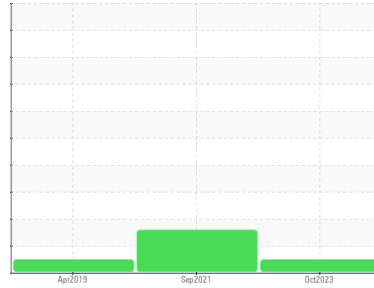

Machine Id
KAESER SM 7.5 4247638 (S/N 1049)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA000542	KCP37659	KCP18244
Sample Date	Client Info		23 Oct 2023	08 Sep 2021	30 Apr 2019
Machine Age	hrs	Client Info	59038	40491	23564
Oil Age	hrs	Client Info	0	3000	5200
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	<1	<1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >10	0	<1	<1
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >50	4	2	1
Tin	ppm	ASTM D5185m >10	0	0	<1
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	8	0
Barium	ppm	ASTM D5185m 90	0	7	19
Molybdenum	ppm	ASTM D5185m 0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0
Magnesium	ppm	ASTM D5185m 100	26	58	80
Calcium	ppm	ASTM D5185m 0	0	<1	2
Phosphorus	ppm	ASTM D5185m 0	<1	2	<1
Zinc	ppm	ASTM D5185m 0	0	4	5
Sulfur	ppm	ASTM D5185m 23500	20440	18196	23869

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	<1
Sodium	ppm	ASTM D5185m	8	20	22
Potassium	ppm	ASTM D5185m >20	0	3	3
Water	%	ASTM D6304 >0.05	0.012	0.022	0.019
ppm Water	ppm	ASTM D6304 >500	120.6	222.7	190






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		2197	55440	1627
Particles >6µm	ASTM D7647 >1300		501	▲ 18915	397
Particles >14µm	ASTM D7647 >80		42	▲ 2071	23
Particles >21µm	ASTM D7647 >20		14	▲ 364	3
Particles >38µm	ASTM D7647 >4		1	▲ 20	0
Particles >71µm	ASTM D7647 >3		0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	18/16/13	▲ 21/18	16/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.29	0.318	0.292


OIL ANALYSIS REPORT

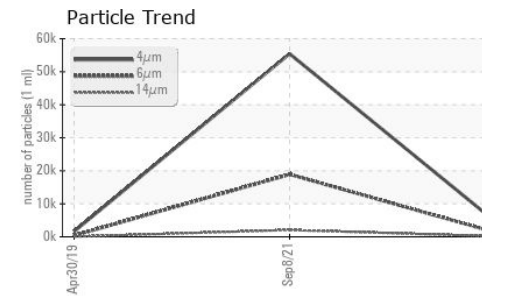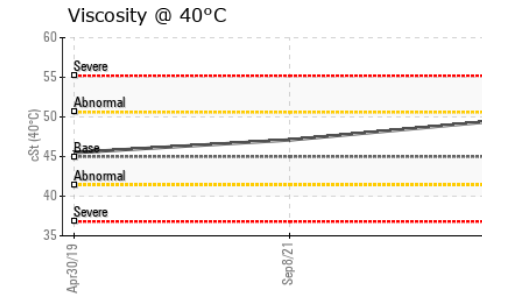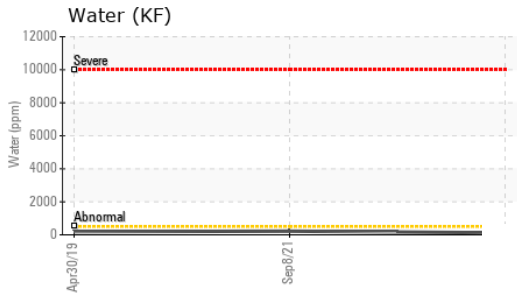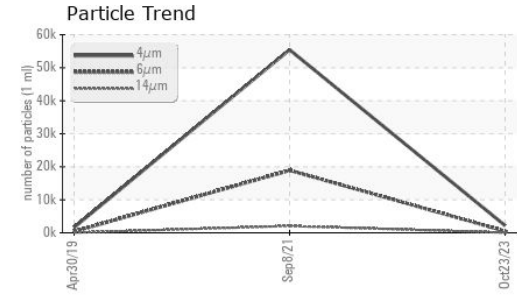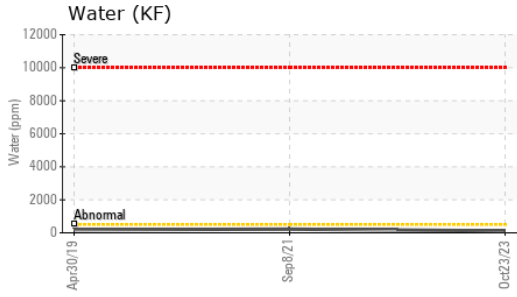






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.6	47.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

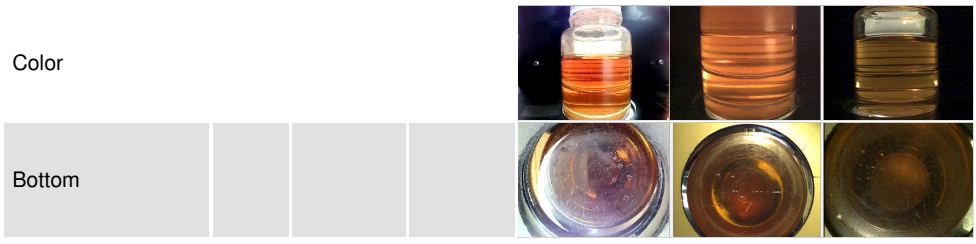

GRAPHS

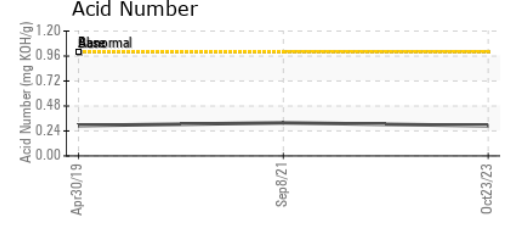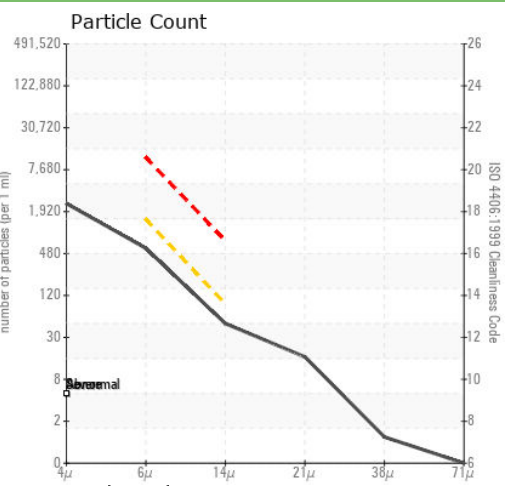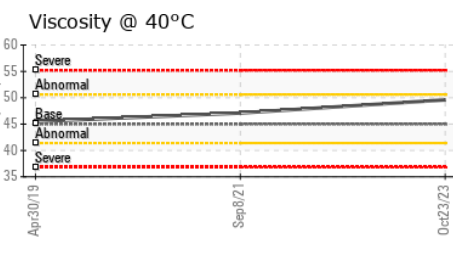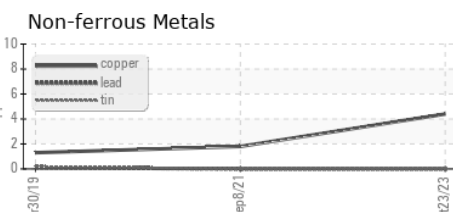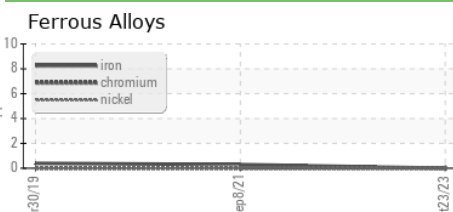

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA000542
Lab Number : 06006356
Unique Number : 10740118
Test Package : IND 2 (Additional Tests: KF, PrtCount)

ICON
 19 SOUTH ST
 BALTIMORE, MD
 US 21201
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: