




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

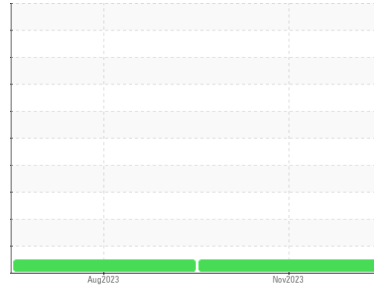

Machine Id  
**6320231**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL06009319</b>	IL05934011	---
Sample Date	Client Info			<b>09 Nov 2023</b>	07 Aug 2023	---
Machine Age	mls	Client Info		<b>7540</b>	3144	---
Oil Age	mls	Client Info		<b>7540</b>	3144	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>64</b>	34	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>4</b>	4	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	9	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>48</b>	28	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>12</b>	23	---
Barium	ppm	ASTM D5185m	10	<b>4</b>	6	---
Molybdenum	ppm	ASTM D5185m	100	<b>47</b>	53	---
Manganese	ppm	ASTM D5185m		<b>6</b>	6	---
Magnesium	ppm	ASTM D5185m	450	<b>572</b>	659	---
Calcium	ppm	ASTM D5185m	3000	<b>1361</b>	1496	---
Phosphorus	ppm	ASTM D5185m	1150	<b>831</b>	1002	---
Zinc	ppm	ASTM D5185m	1350	<b>1084</b>	1203	---
Sulfur	ppm	ASTM D5185m	4250	<b>2799</b>	3910	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>20</b>	20	---
Sodium	ppm	ASTM D5185m	>75	<b>6</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>31</b>	20	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.8</b>	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	19.3	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.1</b>	15.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.7</b>	9.2	---







# OIL ANALYSIS REPORT

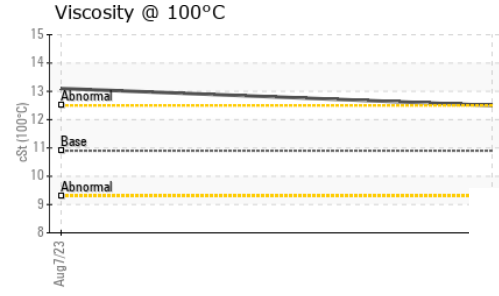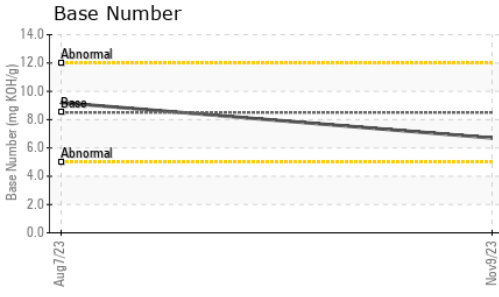

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>12.5</b>	13.1	---

## GRAPHS

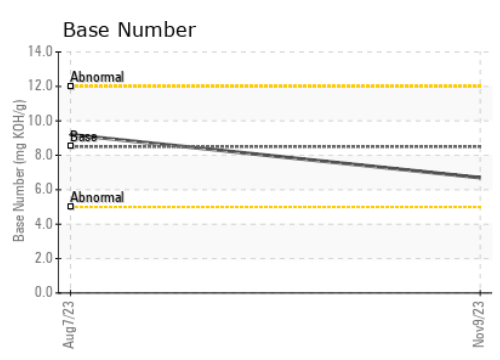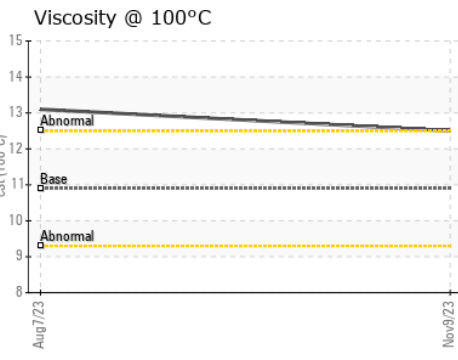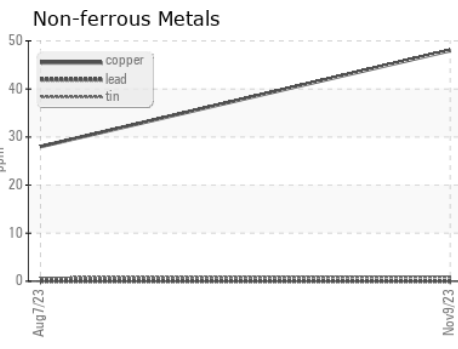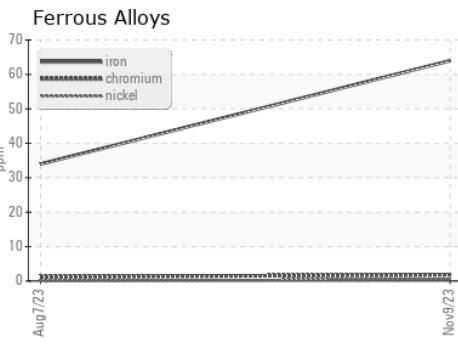

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL06009319 **Received** : 16 Nov 2023  
**Lab Number** : **06009319** **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10743081 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**IDEALEASE OF ATLANTA - FULTON**  
 4675 BAKERS FERRY ROAD  
 ATLANTA, GA  
 US 30331  
 Contact: DAVID JOHNS  
 davidjohns@idealease.com  
 T: (404)699-5571  
 F: (404)699-7420

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)