




PROBLEM SUMMARY

Sample Rating Trend

ISO




Area
412
 Machine Id
CARBON BLACK PURGE BLOWER
 Component
Outboard Bearing
 Fluid
ESSO NUTO H ISO 68 (1 QTS)

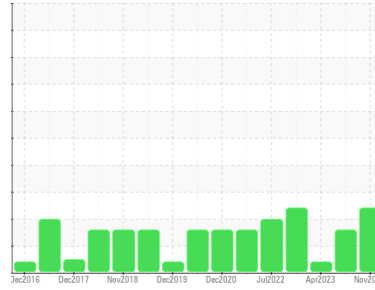

COMPONENT CONDITION SUMMARY

▲ Particle Trend

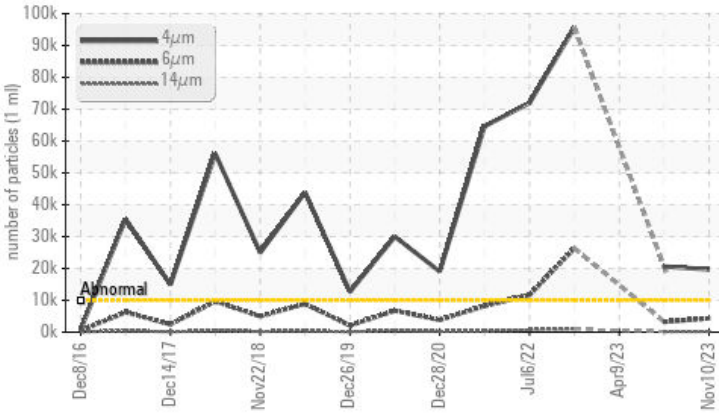

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>10000	▲ 19691	▲ 20604	---
Particles >6µm	ASTM D7647	>2500	▲ 4332	▲ 3251	---
Particles >14µm	ASTM D7647	>160	▲ 191	▲ 173	---
Particles >21µm	ASTM D7647	>40	▲ 41	47	---
Oil Cleanliness	ISO 4406 (c)	>20/18/14	▲ 21/19/15	▲ 22/19/15	---
Debris	scalar *Visual	NONE	▲ MODER	NONE	▲ MODER

Customer Id: BRIDES
 Sample No.: WC0838846
 Lab Number: 06009514
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

05 Jul 2023 Diag: Angela Borella

ISO



The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



09 Apr 2023 Diag: Don Baldrige

VIS DEBRIS



No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



30 Dec 2022 Diag: Angela Borella

ISO



The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

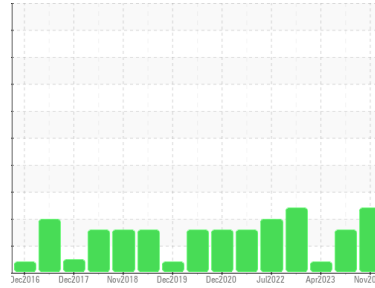

ISO



Area
412
Machine Id
CARBON BLACK PURGE BLOWER
Component
Outboard Bearing
Fluid
ESSO NUTO H ISO 68 (1 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0838846	WC0640606	WC0569567
Sample Date	Client Info		10 Nov 2023	05 Jul 2023	09 Apr 2023
Machine Age	mths	Client Info	6	6	0
Oil Age	mths	Client Info	0	0	4
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		7	12	12
Iron	ppm	ASTM D5185m >20	<1	1	<1
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	<1	0
Lead	ppm	ASTM D5185m >20	<1	<1	0
Copper	ppm	ASTM D5185m >20	3	5	<1
Tin	ppm	ASTM D5185m >20	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 0	7	0	0
Molybdenum	ppm	ASTM D5185m 0	0	<1	<1
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m 5	<1	0	4
Calcium	ppm	ASTM D5185m 50	39	39	50
Phosphorus	ppm	ASTM D5185m 330	321	335	339
Zinc	ppm	ASTM D5185m 420	380	420	433
Sulfur	ppm	ASTM D5185m 3100	2728	3183	2681

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	2	2
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m >20	<1	<1	0

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 19691	▲ 20604	---
Particles >6µm	ASTM D7647	>2500	▲ 4332	▲ 3251	---
Particles >14µm	ASTM D7647	>160	▲ 191	▲ 173	---
Particles >21µm	ASTM D7647	>40	▲ 41	47	---
Particles >38µm	ASTM D7647	>10	2	3	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/14	▲ 21/19/15	▲ 22/19/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 .40	0.37	0.40	0.41



OIL ANALYSIS REPORT

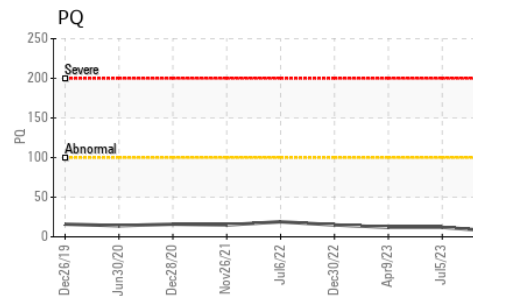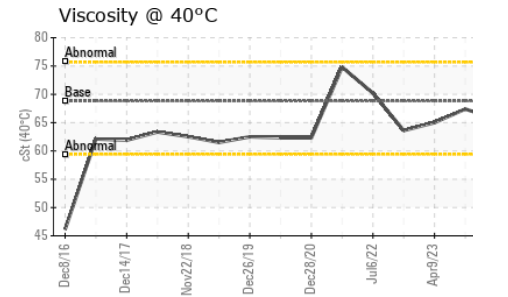
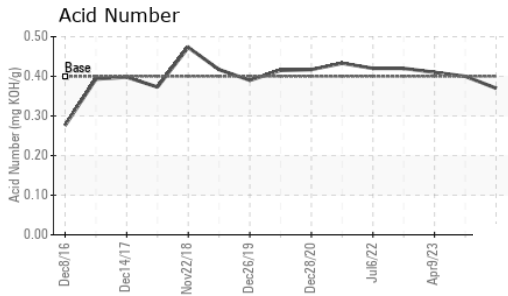
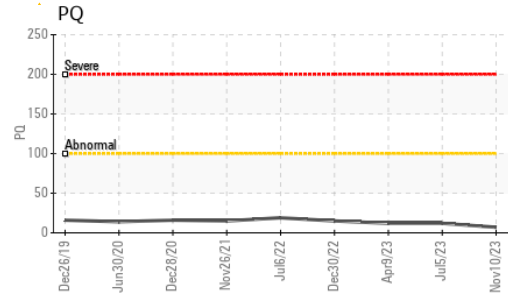
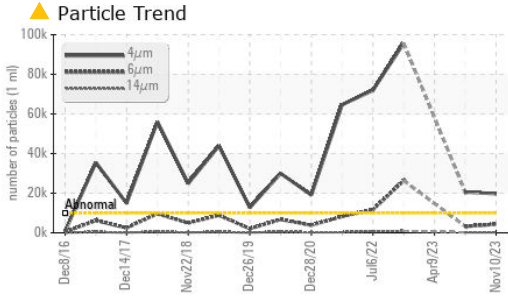


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.8	65.6	67.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

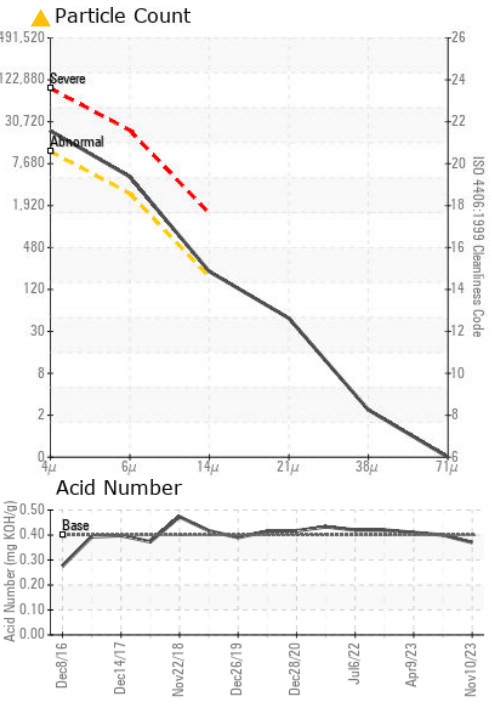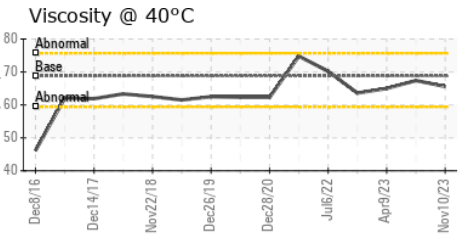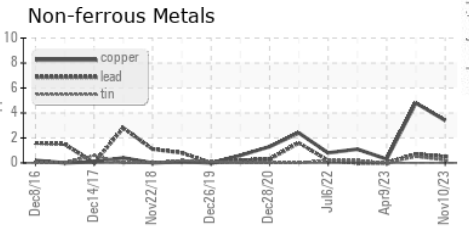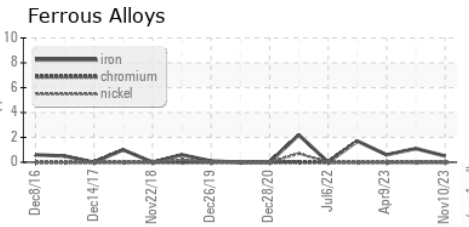

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0838846 **Received** : 16 Nov 2023
Lab Number : 06009514 **Diagnosed** : 19 Nov 2023
Unique Number : 10743276 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: PQ, PrtCount)

BRIDGESTONE FIRESTONE - DES MOINES
 4600 NW 2ND AVE
 DES MOINES, IA
 US 50313
 Contact: SCOTT CARTER
 CarterScottA@FirestoneAg.com
 T: x:
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)