



# OIL ANALYSIS REPORT

Sample Rating Trend


FUEL



Machine Id  
**FORD F450 MT1143 (S/N EB31143)**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

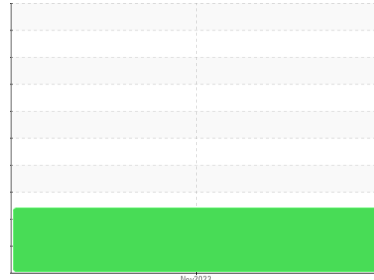

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HPL0003990</b>	---	---
Sample Date	Client Info			<b>21 Nov 2023</b>	---	---
Machine Age	mls Client Info			<b>63660</b>	---	---
Oil Age	mls Client Info			<b>6230</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>SEVERE</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>200</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>13</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>15	<b>29</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>45	<b>8</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>2</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	100	<b>469</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	450	<b>811</b>	---	---
Calcium	ppm	ASTM D5185m	3000	<b>2187</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>924</b>	---	---
Zinc	ppm	ASTM D5185m	1350	<b>1071</b>	---	---
Sulfur	ppm	ASTM D5185m	4250	<b>5492</b>	---	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>14</b>	---	---
Sodium	ppm	ASTM D5185m	>158	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Fuel	%	ASTM D3524	>5	<b>24.8</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>24.5</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>52.0</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>62.8</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.88</b>	---	---











# OIL ANALYSIS REPORT

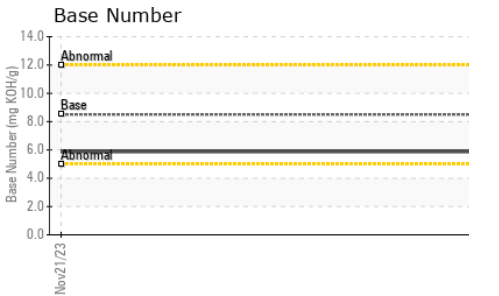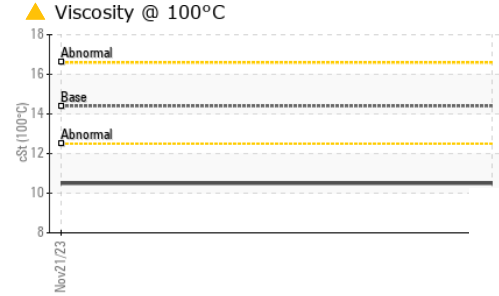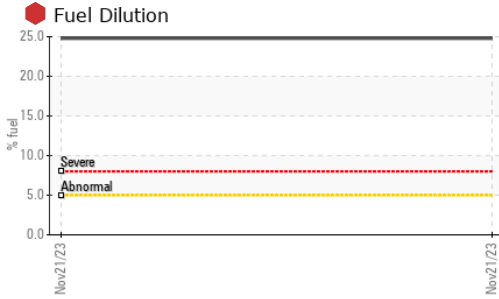

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4 ▲ 10.5	---	---

## GRAPHS

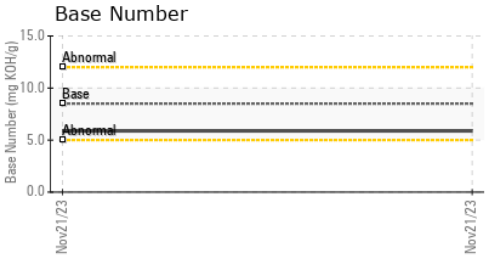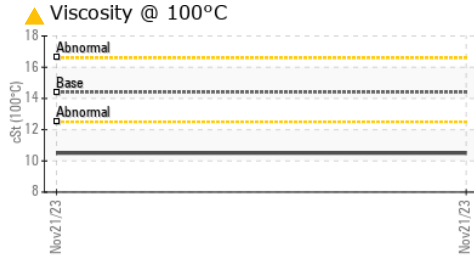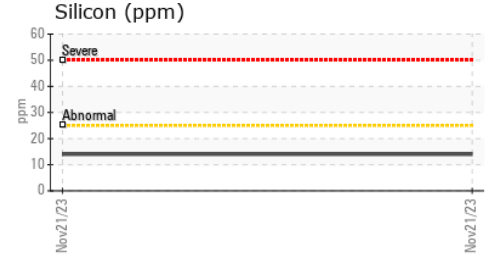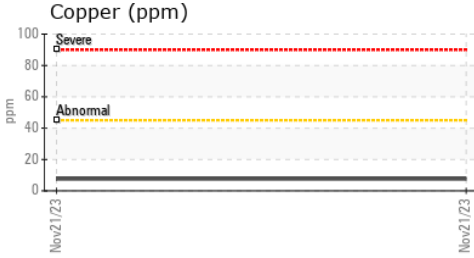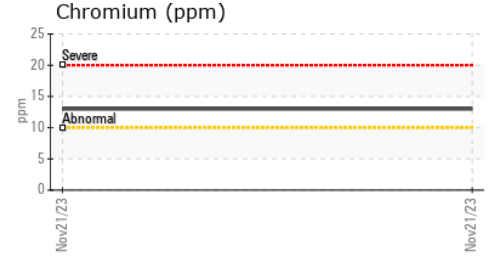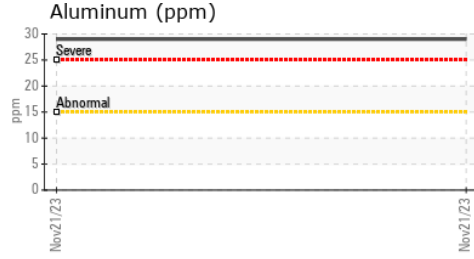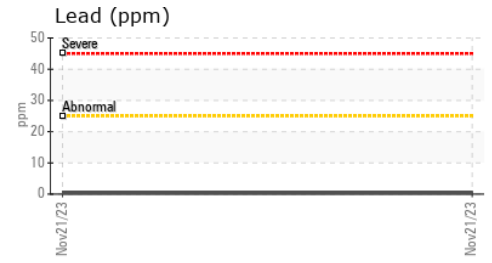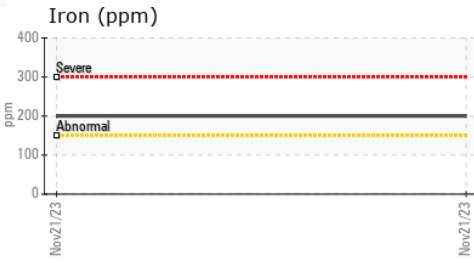

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0003990 **Received** : 08 Dec 2023  
**Lab Number** : 06029575 **Diagnosed** : 18 Dec 2023  
**Unique Number** : 10779366 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**STEVENSON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440  
 Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com

T: (630)972-9199

F: