




OIL ANALYSIS REPORT

Sample Rating Trend

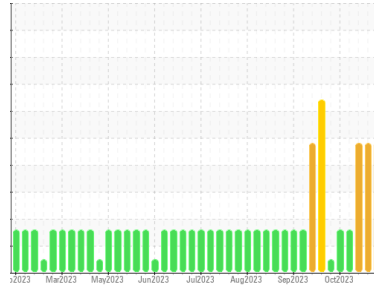

DIRT



Machine Id
2 (S/N GZJ00315)
 Component
Natural Gas Engine
 Fluid
PETRO CANADA SENTRON CG 40 (145 GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. (Customer Sample Comment: 150 gallons added)

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0836466	WC0836468	WC0836474
Sample Date	Client Info		05 Dec 2023	21 Nov 2023	14 Nov 2023
Machine Age	hrs	Client Info	123404	123100	122935
Oil Age	hrs	Client Info	0	978	791
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			SEVERE	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	14	11	5
Chromium	ppm	ASTM D5185m >4	1	<1	<1
Nickel	ppm	ASTM D5185m >2	1	1	<1
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	4	2	3
Lead	ppm	ASTM D5185m >30	2	2	<1
Copper	ppm	ASTM D5185m >35	5	5	3
Tin	ppm	ASTM D5185m >4	8	7	6
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	<1	0
Barium	ppm	ASTM D5185m 1	0	<1	0
Molybdenum	ppm	ASTM D5185m 2	2	2	0
Manganese	ppm	ASTM D5185m 1	<1	<1	<1
Magnesium	ppm	ASTM D5185m 9	0	14	15
Calcium	ppm	ASTM D5185m 2712	3083	3113	3008
Phosphorus	ppm	ASTM D5185m 292	278	307	311
Zinc	ppm	ASTM D5185m 342	397	380	390
Sulfur	ppm	ASTM D5185m 2575	4030	4046	3654

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	547	462	364
Sodium	ppm	ASTM D5185m	0	0	2
Potassium	ppm	ASTM D5185m >20	2	2	1
Fuel	%	ASTM D3524 >4.0	0.0	0.3	0.3

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624 >20	6.0	5.9	5.7
Sulfation	Abs.1mm	*ASTM D7415 >30	22.8	22.3	21.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414 >25	14.6	13.9	13.0
Acid Number (AN)	mg KOH/g	ASTM D8045 0.98	1.37	1.28	1.07
Base Number (BN)	mg KOH/g	ASTM D2896 8.1	6.38	6.30	6.27











OIL ANALYSIS REPORT

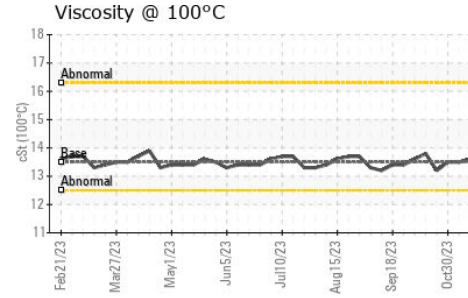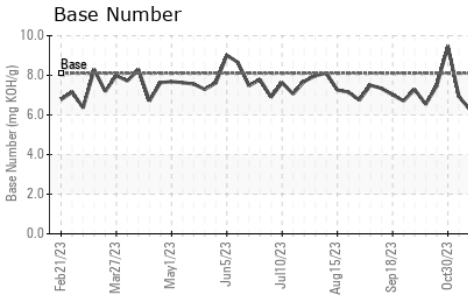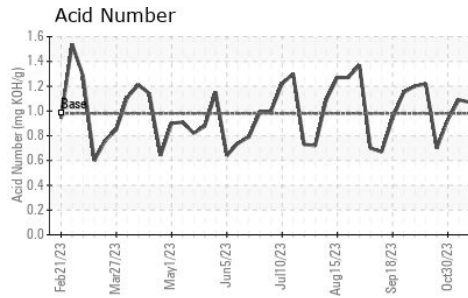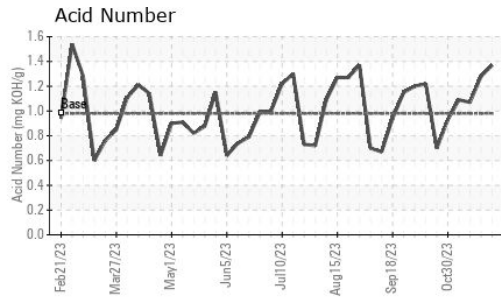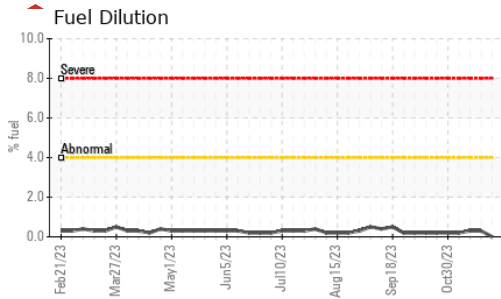

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.5	13.8	13.6

GRAPHS

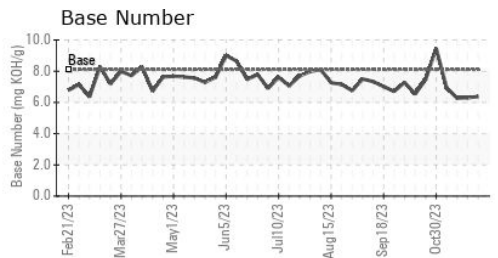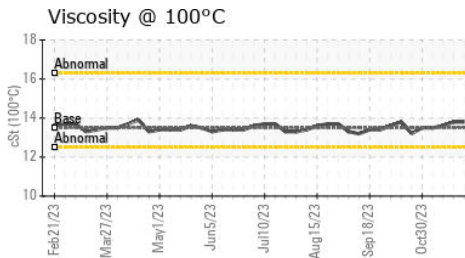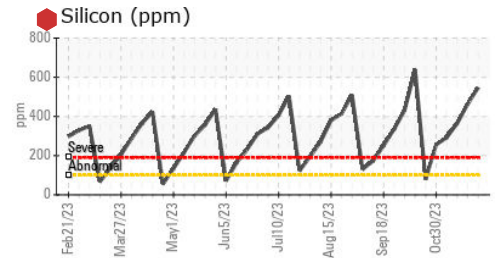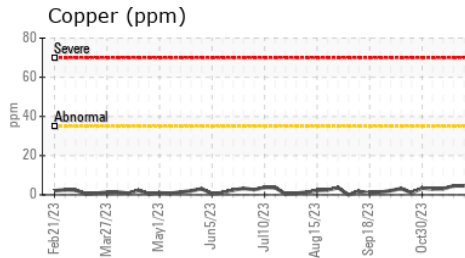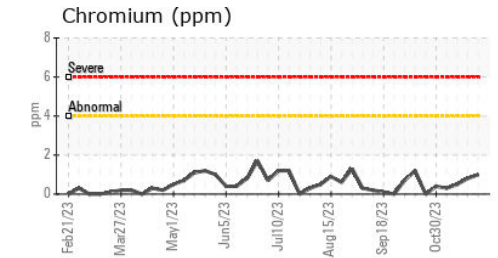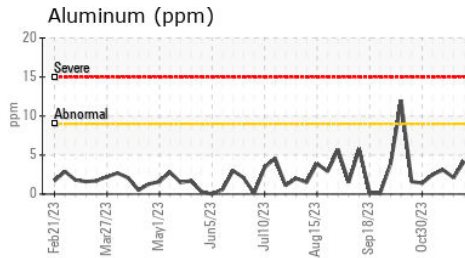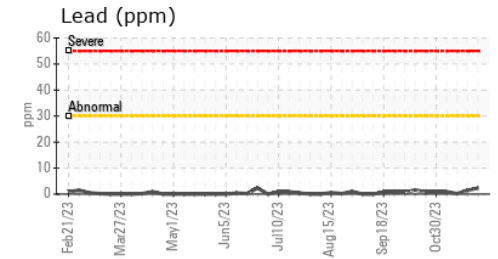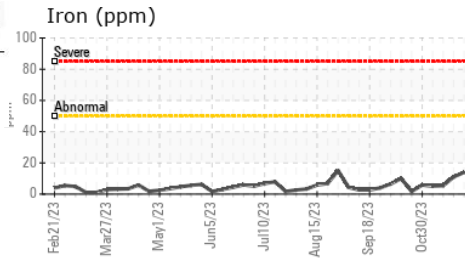

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836466 **Received** : 08 Dec 2023
Lab Number : 06030039 **Diagnosed** : 18 Dec 2023
Unique Number : 10779830 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

FINLEY BIOENERGY
 74265 Bombing Range Road
 Boardman, OR
 US 97818
 Contact: Blain Middleton
 bmiddleton@archaea.energy
 T: (541)481-3232
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)