




# OIL ANALYSIS REPORT

Sample Rating Trend

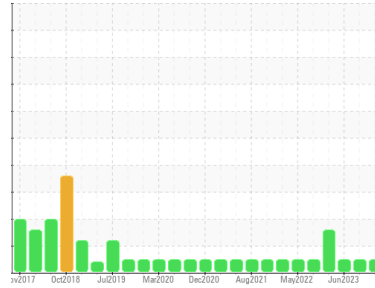

**NORMAL**



Machine Id  
**TOOL ROOM SKID**

Component  
**Hydraulic System**

Fluid  
**MOBIL NUTO 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP0005174</b>	USPM29530	USP250519
Sample Date	Client Info	<b>20 Dec 2023</b>	31 Aug 2023	12 Jun 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>4</b>	3	3
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >20	<b>30</b>	27	23
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185m	<b>17</b>	16	19
Phosphorus	ppm	ASTM D5185m	<b>332</b>	322	325
Zinc	ppm	ASTM D5185m	<b>272</b>	299	315
Sulfur	ppm	ASTM D5185m	<b>2235</b>	2232	2435

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>4</b>	4	3
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Water	%	ASTM D6304 >0.05	<b>0.003</b>	0.006	0.002
ppm Water	ppm	ASTM D6304 >500	<b>29</b>	65.3	16.6

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>1462</b>	686	3067
Particles >6µm	ASTM D7647 >1300	<b>334</b>	156	542
Particles >14µm	ASTM D7647 >160	<b>57</b>	14	19
Particles >21µm	ASTM D7647 >40	<b>28</b>	4	3
Particles >38µm	ASTM D7647 >10	<b>4</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>18/16/13</b>	17/14/11	19/16/11

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.31</b>	0.38	0.36



# OIL ANALYSIS REPORT

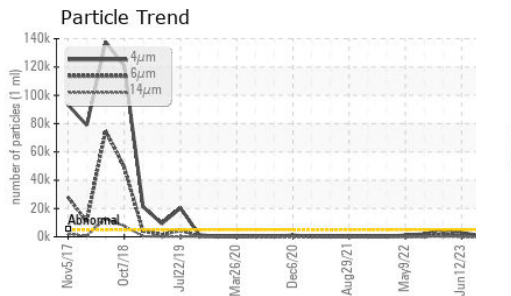
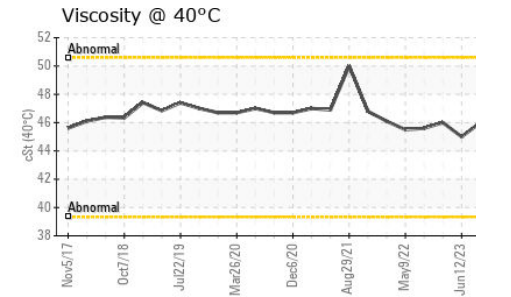
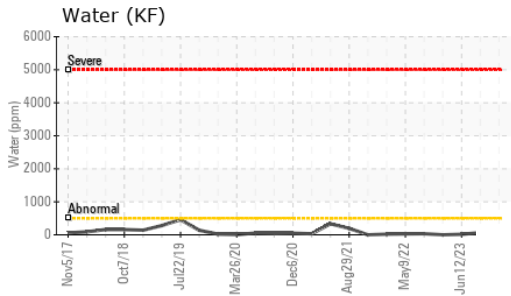
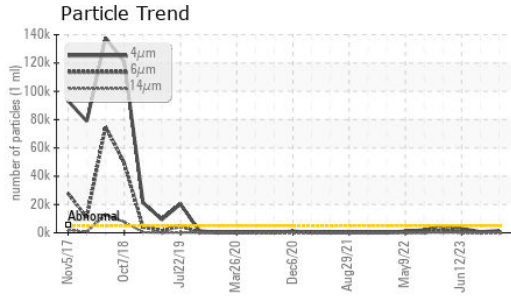
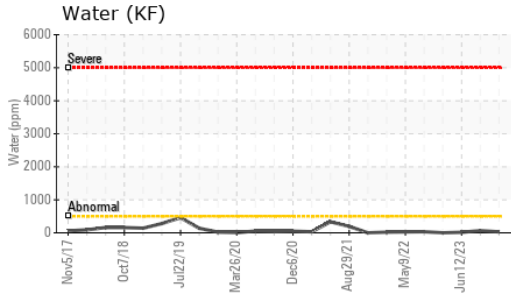


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.1	46.0	45.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

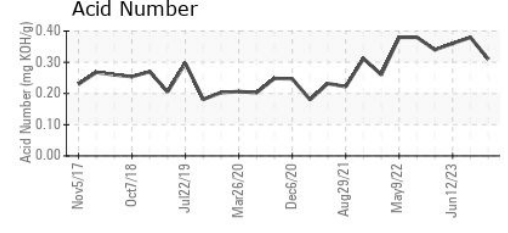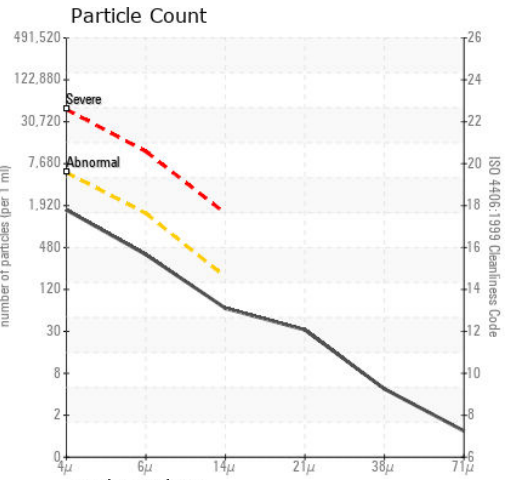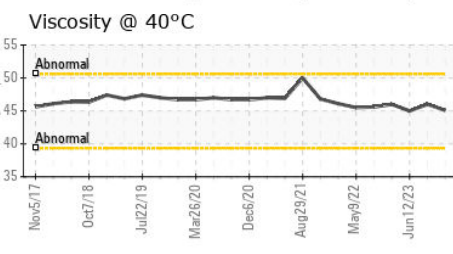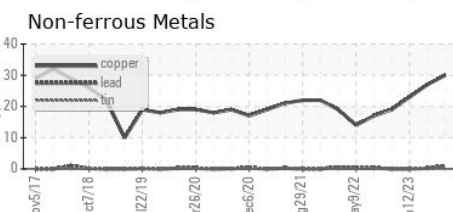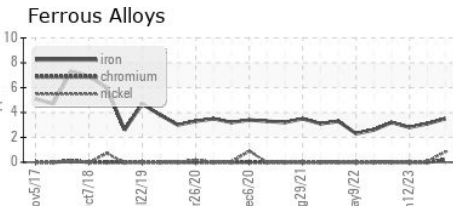

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0005174 **Received** : 08 Jan 2024  
**Lab Number** : 06054953 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10820902 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**TYSON ADVANCEPIERRE FOODS**  
 201 S RALEIGH RD  
 ENID, OK  
 US 73701  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: