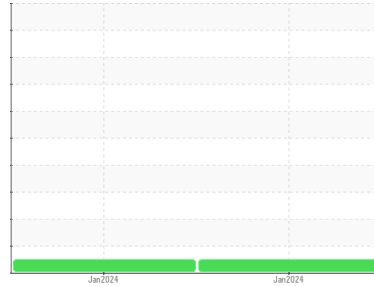


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area

[ALLEN MYERS]

Machine Id

JOHN DEERE 4045 U156189

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)
DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JR0200287	JR0200264	---
Sample Date	Client Info			08 Jan 2024	08 Jan 2024	---
Machine Age	hrs	Client Info		434	434	---
Oil Age	hrs	Client Info		0	434	---
Oil Changed	Client Info			Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.1		<1.0	<1.0	---
Water	WC Method	>0.21		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	<1	5	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>5	1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	4	2	---
Lead	ppm	ASTM D5185m	>26	<1	2	---
Copper	ppm	ASTM D5185m	>26	0	2	---
Tin	ppm	ASTM D5185m	>4	<1	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	<1	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		254	87	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		212	53	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		805	501	---
Calcium	ppm	ASTM D5185m		1306	1612	---
Phosphorus	ppm	ASTM D5185m		875	829	---
Zinc	ppm	ASTM D5185m		1094	1082	---
Sulfur	ppm	ASTM D5185m		3205	3123	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	7	9	---
Sodium	ppm	ASTM D5185m	>31	0	0	---
Potassium	ppm	ASTM D5185m	>20	0	2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0	0	---
Nitration	Abs/cm	*ASTM D7624	>20	5.4	5.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	22.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	19.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	10.1	10.5	---





OIL ANALYSIS REPORT

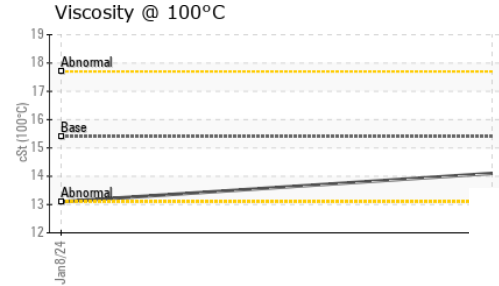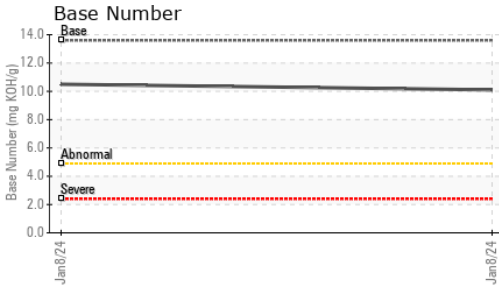

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	13.1	---

GRAPHS

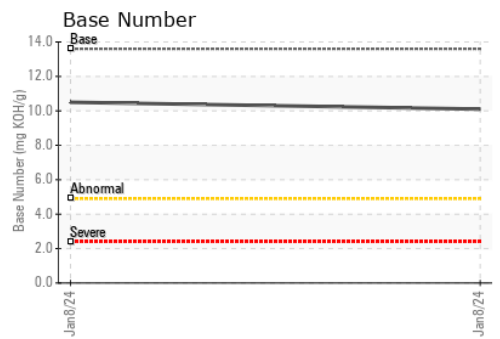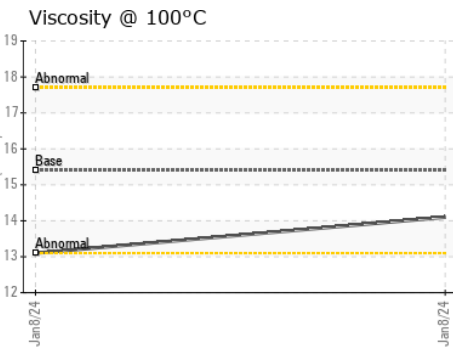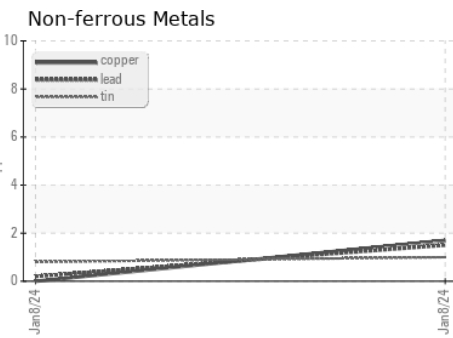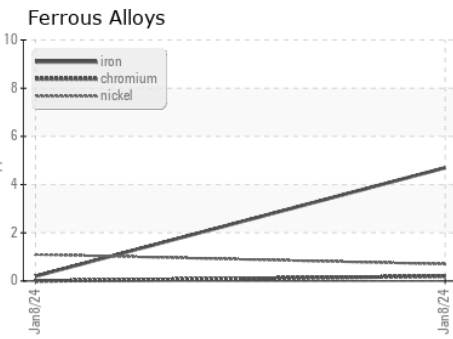

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200287 **Recieved** : 11 Jan 2024
Lab Number : 06057926 **Diagnosed** : 12 Jan 2024
Unique Number : 10829308 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)