



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
PRECISION EDGE 108A

Component
Hydraulic System

Fluid
{not provided} (--- Oz)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC06060203	WC05149373	---
Sample Date	Client Info		11 Jan 2024	29 Dec 2020	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	14	13	---
Chromium	ppm	ASTM D5185m >20	<1	1	---
Nickel	ppm	ASTM D5185m >20	<1	<1	---
Titanium	ppm	ASTM D5185m	0	<1	---
Silver	ppm	ASTM D5185m	0	<1	---
Aluminum	ppm	ASTM D5185m >20	2	4	---
Lead	ppm	ASTM D5185m >20	0	<1	---
Copper	ppm	ASTM D5185m >20	<1	1	---
Tin	ppm	ASTM D5185m >20	0	<1	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	2	---
Barium	ppm	ASTM D5185m	0	2	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	2	2	---
Magnesium	ppm	ASTM D5185m	6	8	---
Calcium	ppm	ASTM D5185m	2616	3520	---
Phosphorus	ppm	ASTM D5185m	147	74	---
Zinc	ppm	ASTM D5185m	36	28	---
Sulfur	ppm	ASTM D5185m	13787	12497	---

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	5	8	---
Sodium	ppm	ASTM D5185m	9	6	---
Potassium	ppm	ASTM D5185m >20	6	4	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 82059	▲ 102503	---
Particles >6µm	ASTM D7647	>1300	▲ 16356	▲ 17397	---
Particles >14µm	ASTM D7647	>160	▲ 292	▲ 418	---
Particles >21µm	ASTM D7647	>40	28	▲ 58	---
Particles >38µm	ASTM D7647	>10	0	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 24/21/15	▲ 24/21/16	---



OIL ANALYSIS REPORT

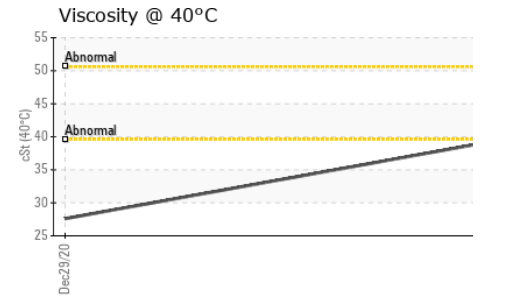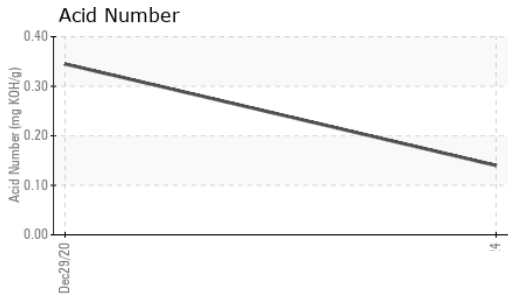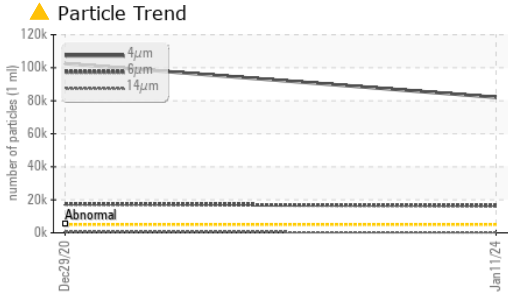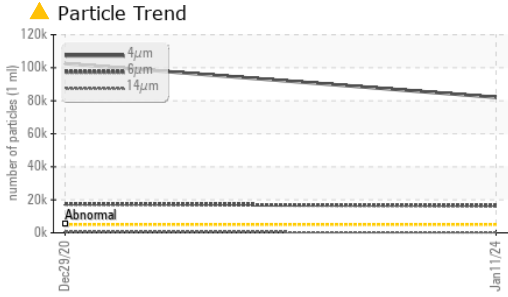


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.14	0.345	---





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		39.4	27.6	---

SAMPLE IMAGES

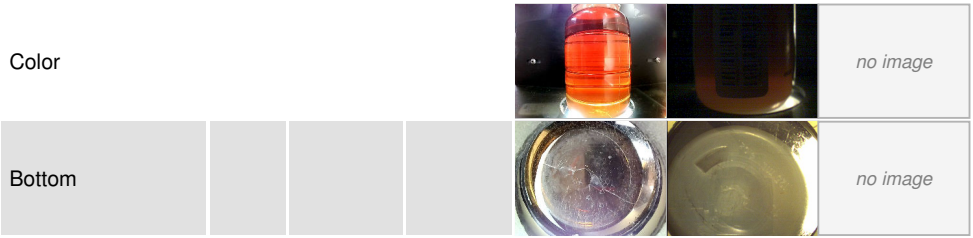

GRAPHS

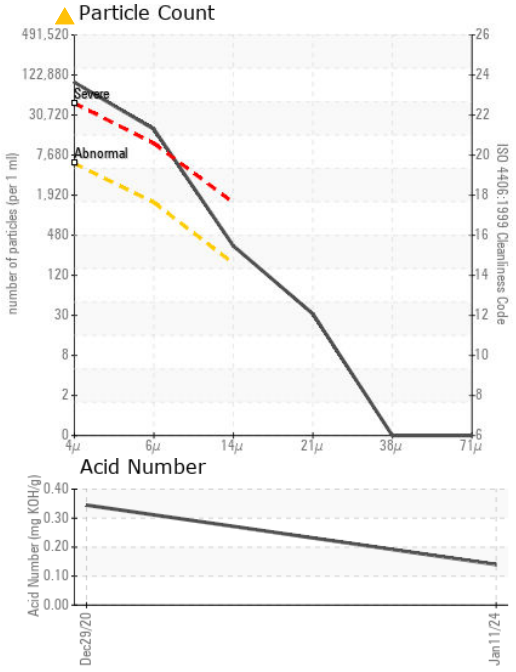

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06060203 **Received** : 12 Jan 2024
Lab Number : 06060203 **Diagnosed** : 16 Jan 2024
Unique Number : 10831585 **Diagnostician** : Don Baldrige
Test Package : IND 2

BUCKEYE LUBRICANTS
 20801 SALISBURY RD
 BEDFORD, OH
 US 44146
 Contact: TOM GARGANTA
 sales@buckeyelubricants.com
 T: (216)581-3600
 F: (216)581-2734

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)