

Machine Id  
**MULTI PRESS 1624**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 26 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST44436</b>	ST44993	ST39930
Sample Date	Client Info			<b>27 Nov 2023</b>	05 Jan 2023	16 Nov 2021
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>10</b>	10	4
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>18</b>	17	17
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	6
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>2</b>	0	0
Calcium	ppm	ASTM D5185m		<b>44</b>	46	48
Phosphorus	ppm	ASTM D5185m		<b>445</b>	391	377
Zinc	ppm	ASTM D5185m		<b>490</b>	514	466
Sulfur	ppm	ASTM D5185m		<b>9268</b>	8884	6905

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185m		<b>3</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	0
Water	%	ASTM D6304	>0.05	<b>0.025</b>	0.026	0.018
ppm Water	ppm	ASTM D6304	>500	<b>260</b>	263.6	181.1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>4384</b>	1738	1857
Particles >6µm		ASTM D7647	>1300	<b>353</b>	354	459
Particles >14µm		ASTM D7647	>160	<b>11</b>	13	42
Particles >21µm		ASTM D7647	>40	<b>4</b>	3	7
Particles >38µm		ASTM D7647	>10	<b>1</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/16/11</b>	18/16/11	18/16/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.79</b>	0.87	0.916


# OIL ANALYSIS REPORT

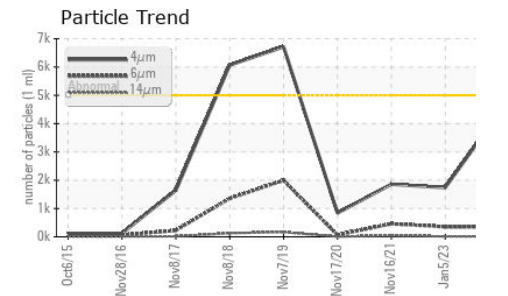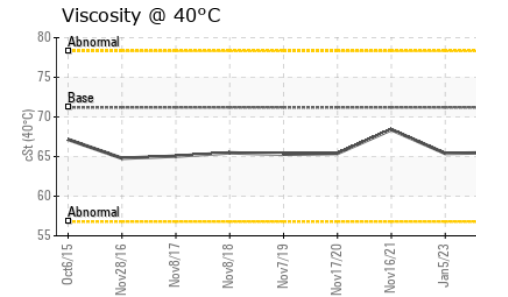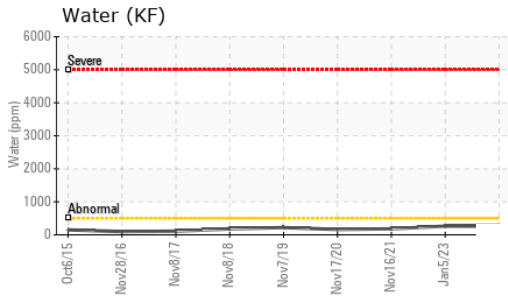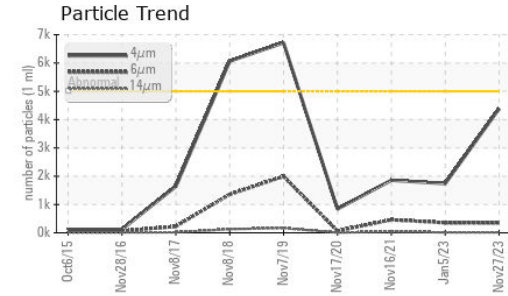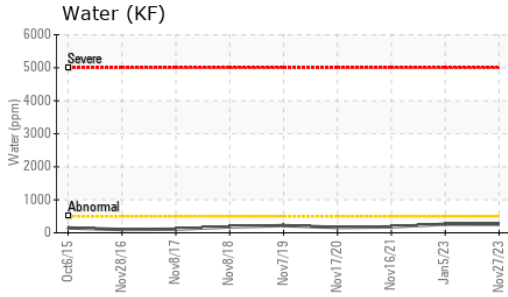






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	71.2	65.5	65.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

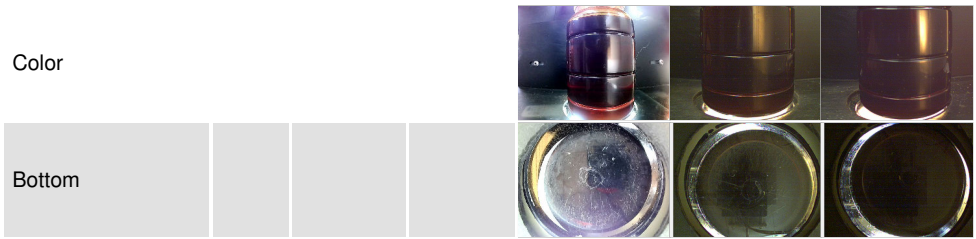

## GRAPHS

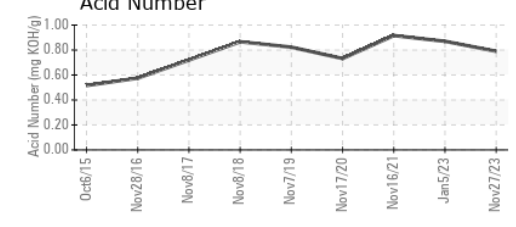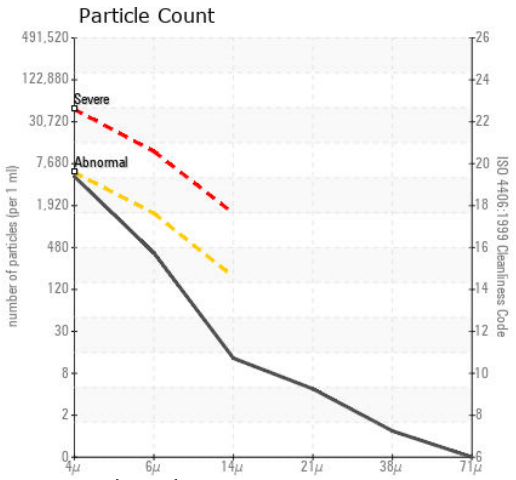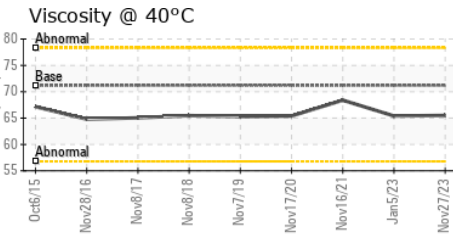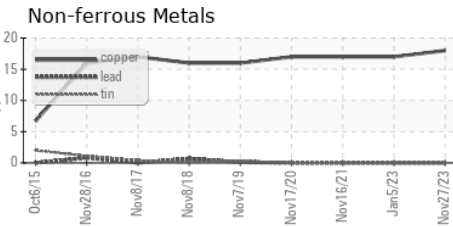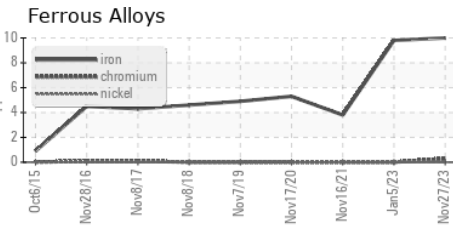

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST44436 **Received** : 12 Jan 2024  
**Lab Number** : 06060230 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831612 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF )

**LARSON TOOL & STAMPING CO**  
 90 OLIVE ST  
 ATTLEBORO, MA  
 US 02703  
 Contact: GARY BRUNE  
 gbrune@larsonstool.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)