

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER AIRCENTER SM 10 5007921 - 1714

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006414	KCP47193D	KCP34033
Sample Date		Client Info		12 Oct 2023	24 Oct 2022	02 Dec 2020
Machine Age	hrs	Client Info		36136	29027	15763
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		4	6	17
Tin	ppm	ASTM D5185m	>10	4	0	<1
			>10	-		
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	8	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	70	41	37
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		40	6	3
Zinc	ppm	ASTM D5185m		0	2	4
Sulfur	ppm	ASTM D5185m		20814	14695	16613
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		21	13	17
Potassium	ppm	ASTM D5185m	>20	3	3	2
Water	%	ASTM D6304	>0.05	0.027	0.012	0.013
ppm Water	ppm	ASTM D6304	>500	272	129.1	136.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1516	1198	71827
Particles >6µm		ASTM D7647	>1300	390	296	▲ 32916
Particles >14µm		ASTM D7647	>80	43	21	4 549
Particles >21μm		ASTM D7647	>20	14	7	1 333
Particles >38µm		ASTM D7647	>4	2	1	▲ 62
Particles >71µm		ASTM D7647		0	0	6
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13	17/15/12	▲ 22/19
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Aoid Number (AN)						
Acid Number (AN) :05:41) Rev: 1	mg KOH/g	ASTM D8045	0.4 Contact/I	0.35 ocation: SERVI	0.25 CE MANAGER	0.309 ? - COBALIST


Report Id: COBAUSTX [WUSCAR] 06060291 (Generated: 01/16/2024 17:05:41) Rev: 1


Contact/Location: SERVICE MANAGER ? - COBAUSTX



OIL ANALYSIS REPORT





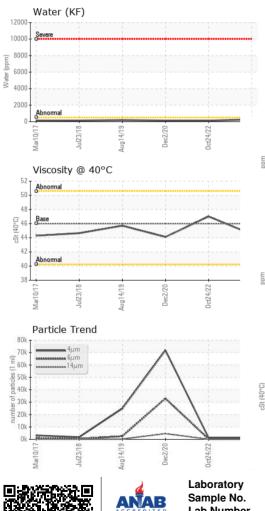

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	47.0	44.1
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color				•		
Bottom						

