




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

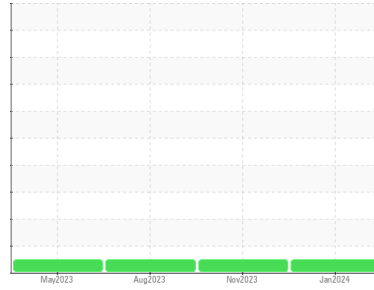

Area
TM 7
 Machine Id
TM 7 VISCONIP HYD 68
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | RP0030326 | RP0034388 | RP0034354 |
| Sample Date | Client Info | | | 11 Jan 2024 | 01 Nov 2023 | 28 Aug 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|-----------|----------|----------|
| PQ | | ASTM D8184 | | 12 | 11 | --- |
| Iron | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >20 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 0 | <1 | 3 |
| Lead | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >20 | 0 | <1 | 0 |
| Tin | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |






| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 5 | <1 | <1 | 0 |
| Barium | ppm | ASTM D5185m | 5 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 5 | 0 | 1 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 25 | 44 | 43 | 42 |
| Calcium | ppm | ASTM D5185m | 200 | 39 | 41 | 40 |
| Phosphorus | ppm | ASTM D5185m | 300 | 291 | 254 | 290 |
| Zinc | ppm | ASTM D5185m | 370 | 366 | 353 | 356 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 1 | 0 |
| Water | % | ASTM D6304 | >0.05 | 0.008 | 0.005 | 0.007 |
| ppm Water | ppm | ASTM D6304 | >500 | 88 | 50.2 | 70.9 |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm | | ASTM D7647 | >5000 | 401 | 53 | 358 |
| Particles >6µm | | ASTM D7647 | >1300 | 133 | 19 | 110 |
| Particles >14µm | | ASTM D7647 | >160 | 17 | 3 | 11 |
| Particles >21µm | | ASTM D7647 | >40 | 6 | 1 | 3 |
| Particles >38µm | | ASTM D7647 | >10 | 0 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 16/14/11 | 13/11/9 | 16/14/11 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.57 | 0.39 | 0.36 | 0.41 |


OIL ANALYSIS REPORT

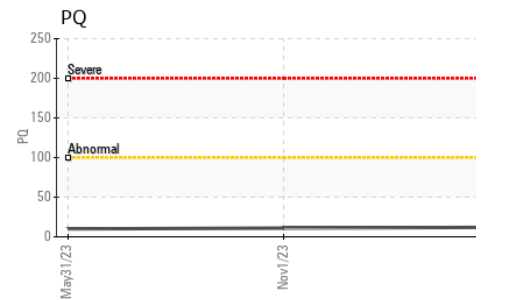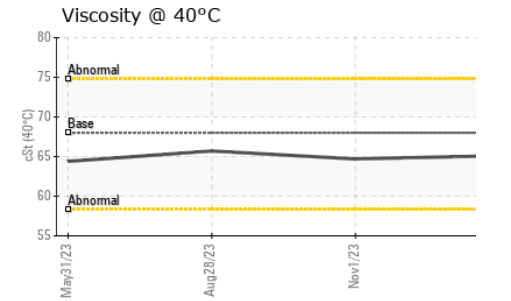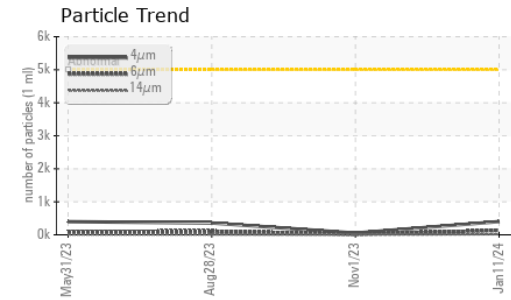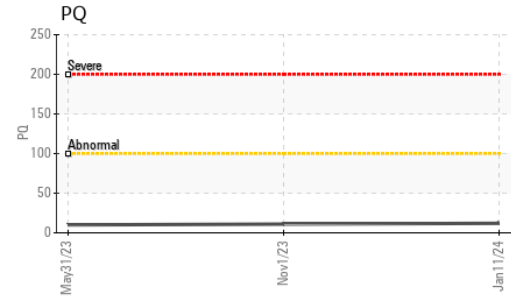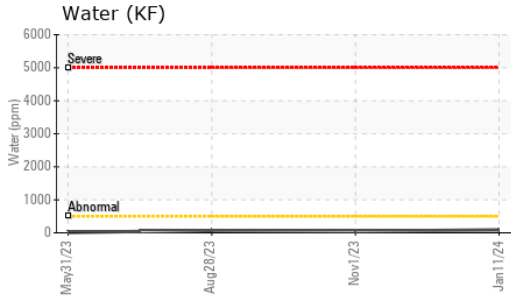






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 68 | 65.1 | 64.7 | 65.7 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

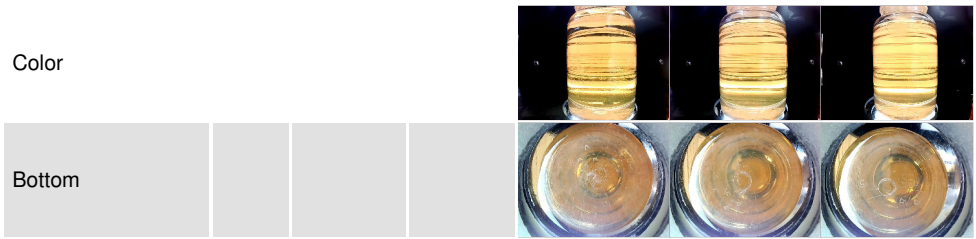

GRAPHS

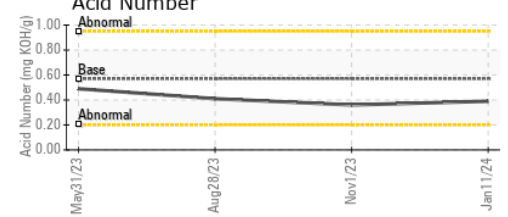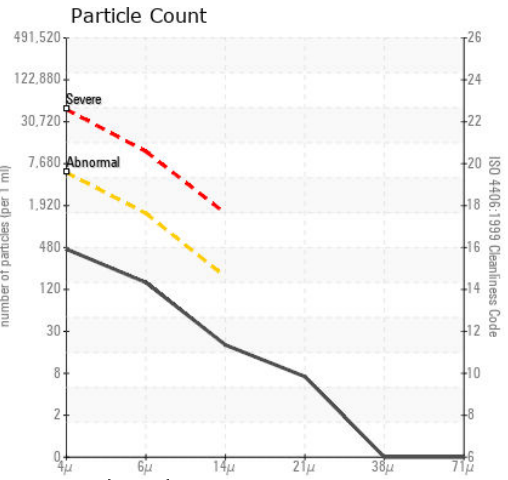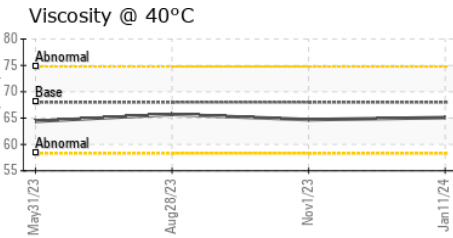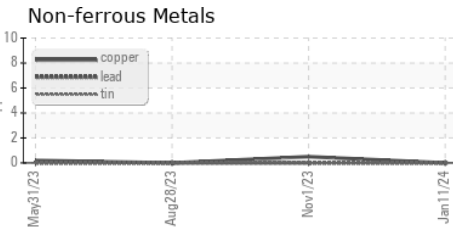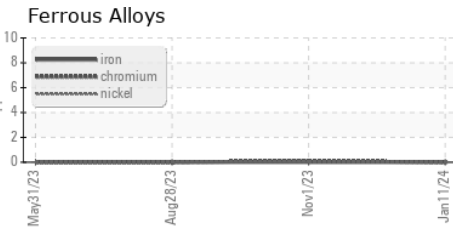

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0030326 **Received** : 12 Jan 2024
Lab Number : 06060329 **Diagnosed** : 17 Jan 2024
Unique Number : 10831711 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: PQ)

Kimberly-Clark - Mobile - TM 7
 200 BAYBRIDGE RD
 MOBILE, AL
 US 36610
 Contact: BRAD SNOW
 brad.snow@kcc.com
 T:
 F: (251)452-6335

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)