




OIL ANALYSIS REPORT

Sample Rating Trend

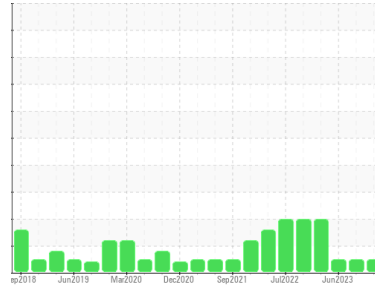

NORMAL



Area
Aji-Tein
 Machine Id
CS-3501D
 Component
Lube System
 Fluid
ROYAL PURPLE SYNFILM GT 46 (14 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0870649	WC0804739	WC0804735
Sample Date	Client Info		10 Jan 2024	14 Sep 2023	23 Jun 2023
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	15	13	10
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >10	0	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	2	0	0
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >75	23	18	13
Tin	ppm	ASTM D5185m >10	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 0	0	0	<1
Molybdenum	ppm	ASTM D5185m 0	<1	0	<1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 95	10	13	20
Calcium	ppm	ASTM D5185m 0	<1	2	2
Phosphorus	ppm	ASTM D5185m 0	273	284	234
Zinc	ppm	ASTM D5185m 0	9	27	30
Sulfur	ppm	ASTM D5185m 15000	18770	21446	19074

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	0	<1	<1
Sodium	ppm	ASTM D5185m	0	3	2
Potassium	ppm	ASTM D5185m >20	<1	0	2
Water	%	ASTM D6304 >0.1	0.003	0.008	0.009
ppm Water	ppm	ASTM D6304 >1000	31	80.3	94.6

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	144	303	276
Particles >6µm	ASTM D7647	>160	47	141	98
Particles >14µm	ASTM D7647	>40	8	28	8
Particles >21µm	ASTM D7647	>10	3	11	2
Particles >38µm	ASTM D7647	>3	1	0	0
Particles >71µm	ASTM D7647	>3	1	0	0
Oil Cleanliness	ISO 4406 (c)	>16/14/12	14/13/10	15/14/12	15/14/10

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.97	0.90	0.91




OIL ANALYSIS REPORT

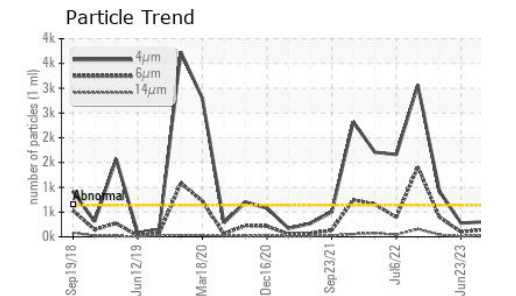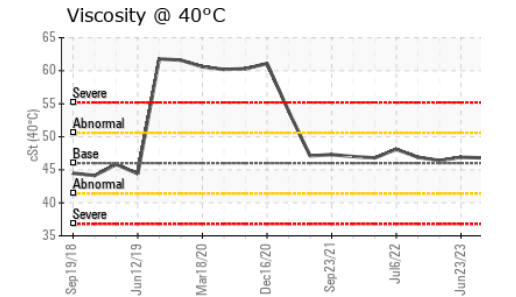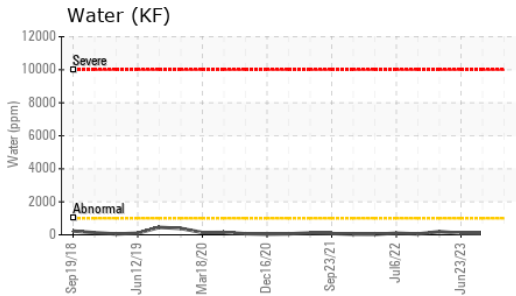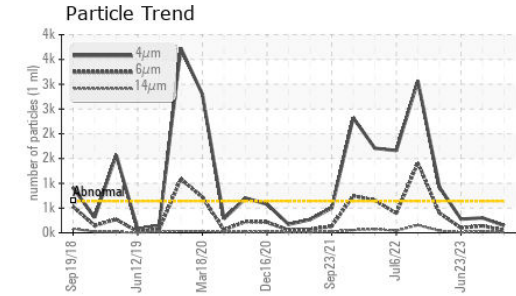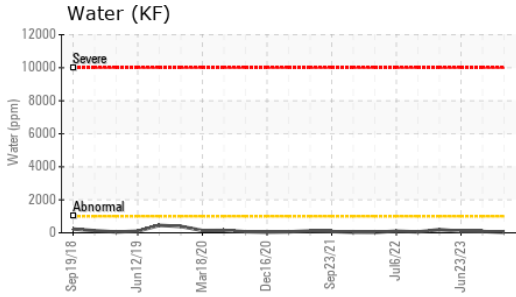






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	47.3	46.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

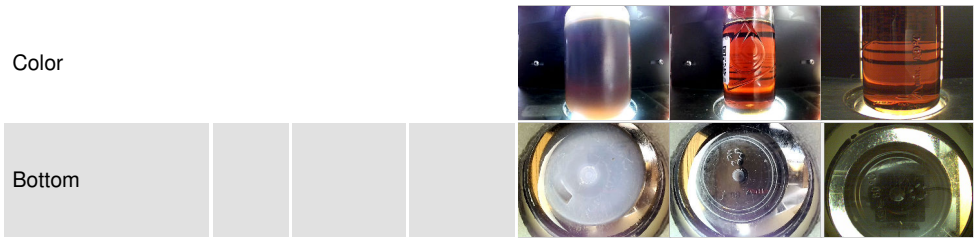

GRAPHS

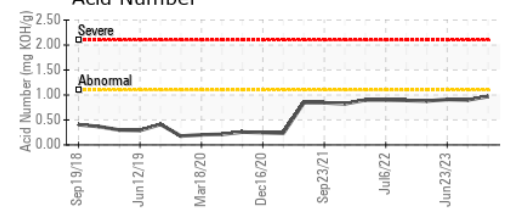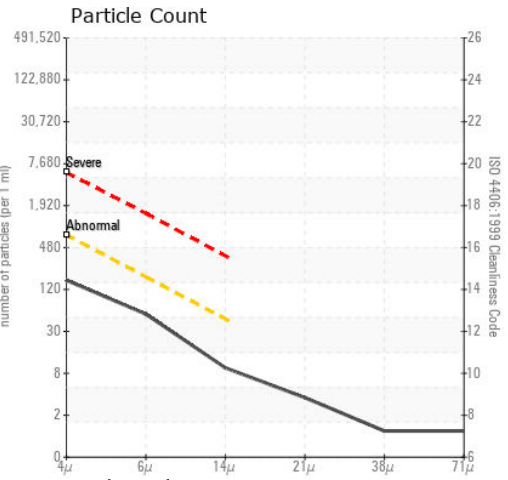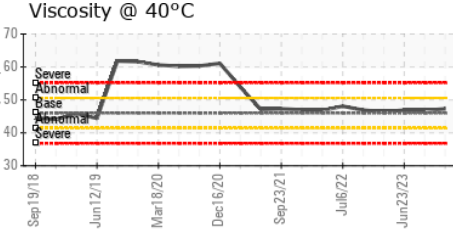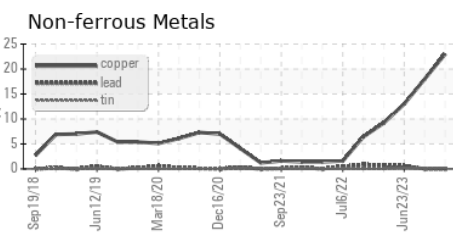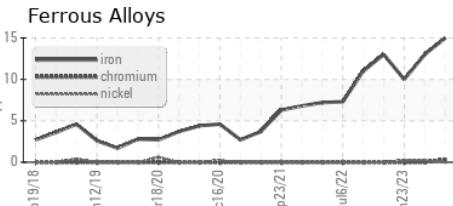

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0870649 **Received** : 16 Jan 2024
Lab Number : 06061933 **Diagnosed** : 18 Jan 2024
Unique Number : 10833315 **Diagnostician** : Don Baldrige
Test Package : PLANT

AJINOMOTO ANIMAL NUTRITION NORTH AMERICA, INC.
 1116 HWY 137
 EDDYVILLE, IA
 US 52553
 Contact: Alan Brittain
 brittaina@ajiusa.com
 T: (641)295-0086
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)