




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

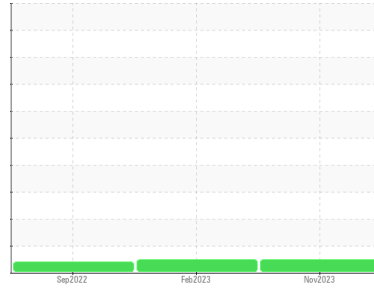

Machine Id
441484

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			IL0030537	IL0026674	IL0022912
Sample Date	Client Info			27 Nov 2023	08 Feb 2023	29 Sep 2022
Machine Age	mls Client Info			121404	60372	31551
Oil Age	mls Client Info			61032	60372	0
Oil Changed	Client Info			N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	1.1
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	43	25	63
Chromium	ppm	ASTM D5185m	>20	2	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	10	12	27
Lead	ppm	ASTM D5185m	>40	17	2	6
Copper	ppm	ASTM D5185m	>330	4	4	27
Tin	ppm	ASTM D5185m	>15	2	1	4
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	2	4	45
Barium	ppm	ASTM D5185m	10	<1	0	2
Molybdenum	ppm	ASTM D5185m	100	64	59	64
Manganese	ppm	ASTM D5185m		1	1	6
Magnesium	ppm	ASTM D5185m	450	1022	846	438
Calcium	ppm	ASTM D5185m	3000	1110	1168	1686
Phosphorus	ppm	ASTM D5185m	1150	1048	856	939
Zinc	ppm	ASTM D5185m	1350	1292	1145	1181
Sulfur	ppm	ASTM D5185m	4250	2977	2894	2891



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11	11	46
Sodium	ppm	ASTM D5185m	>216	3	1	5
Potassium	ppm	ASTM D5185m	>20	28	39	85

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.1	8.5	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	20.0	23.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.5	15.9	19.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	3.6	8.3	7.7







OIL ANALYSIS REPORT

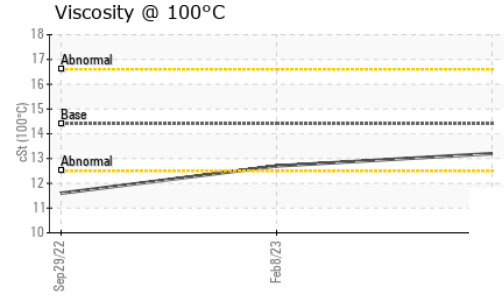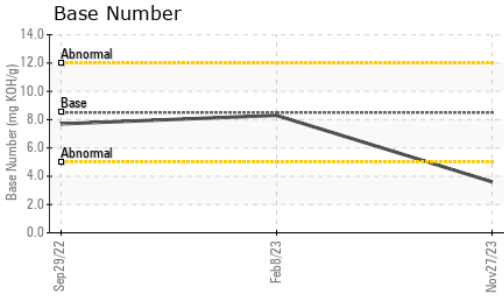

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	12.7 ▲ 11.6

GRAPHS

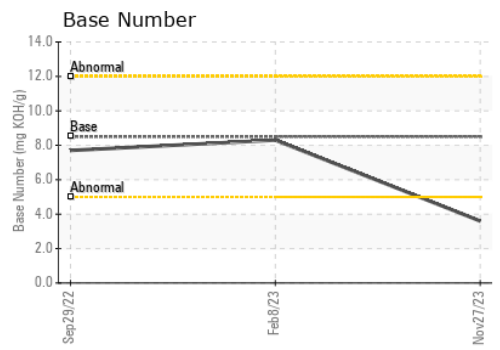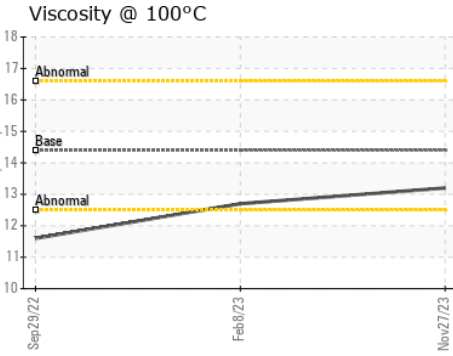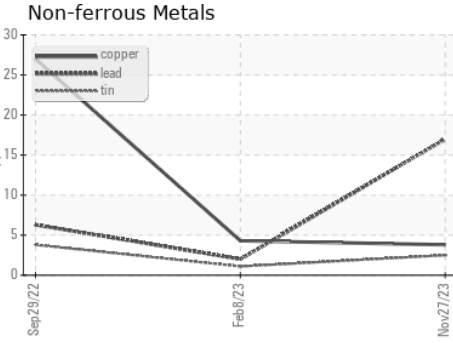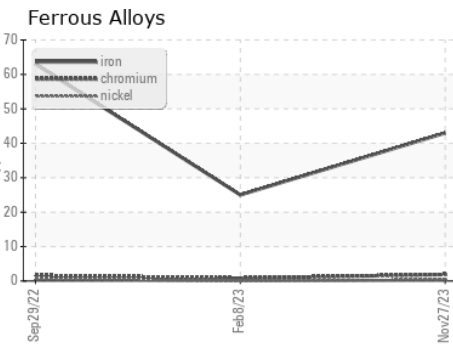

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0030537 **Recieved** : 18 Jan 2024
Lab Number : 06064831 **Diagnosed** : 19 Jan 2024
Unique Number : 10836213 **Diagnostician** : Wes Davis
Test Package : FLEET

RUSH TRUCK LEASING - CHARLOTTE IDEALEASE
 1333 AMERON DR
 CHARLOTTE, NC
 US 28206
 Contact: JERRY DIXON
 dixonj@rushenterprises.com
 T: (704)333-4507
 F: (704)333-4508

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)