




OIL ANALYSIS REPORT

Sample Rating Trend

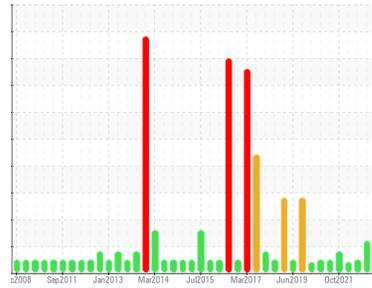

Area
TM 11
 Machine Id
TM 11 WET BROKE AGT REDUCER
 Component
Gearbox
 Fluid
GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0038093	RP0034372	RP0023585
Sample Date	Client Info		29 Jan 2024	08 Aug 2023	05 May 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		17	13	12
Iron	ppm	ASTM D5185m >200	64	50	30
Chromium	ppm	ASTM D5185m >15	<1	<1	<1
Nickel	ppm	ASTM D5185m >15	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	<1	<1
Lead	ppm	ASTM D5185m >100	<1	0	0
Copper	ppm	ASTM D5185m >200	<1	<1	0
Tin	ppm	ASTM D5185m >25	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	31	32	18
Barium	ppm	ASTM D5185m 15	0	19	0
Molybdenum	ppm	ASTM D5185m 15	1	<1	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 50	1	0	0
Calcium	ppm	ASTM D5185m 50	25	21	16
Phosphorus	ppm	ASTM D5185m 350	396	473	364
Zinc	ppm	ASTM D5185m 100	67	88	41

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	3	6	2
Sodium	ppm	ASTM D5185m	0	1	<1
Potassium	ppm	ASTM D5185m >20	3	0	0
Water	%	ASTM D6304 >0.2	0.013	0.019	0.012
ppm Water	ppm	ASTM D6304 >2000	139	192.8	129.6






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	18287	▲ 61726	6222
Particles >6µm	ASTM D7647	>5000	1434	▲ 5731	590
Particles >14µm	ASTM D7647	>640	28	132	11
Particles >21µm	ASTM D7647	>160	5	22	2
Particles >38µm	ASTM D7647	>40	1	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	21/18/12	▲ 23/20/14	20/16/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.85	1.79	1.50	1.34


OIL ANALYSIS REPORT

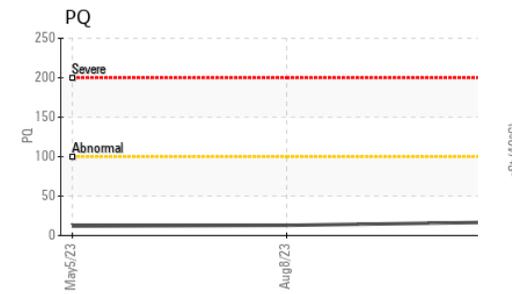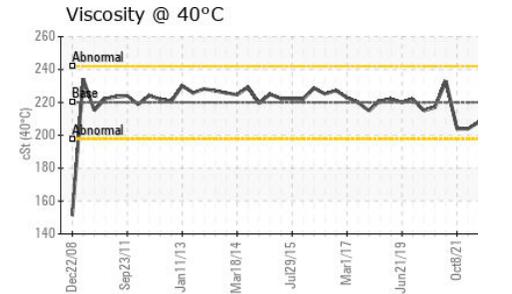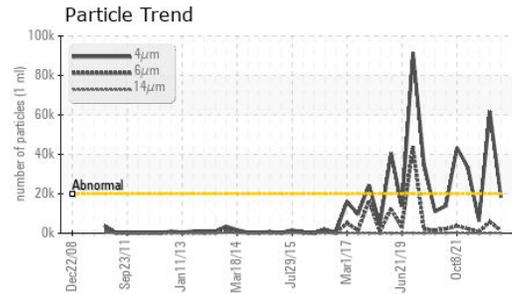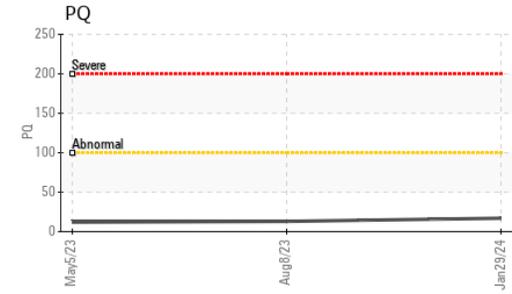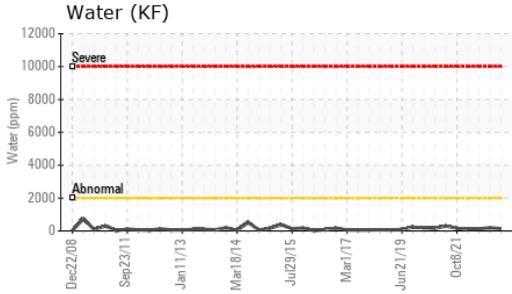






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	210	210	208

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

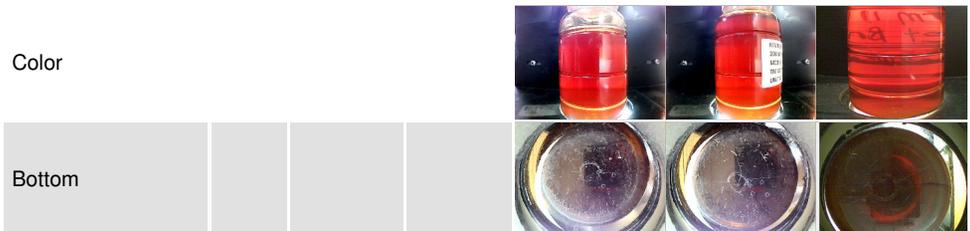

GRAPHS

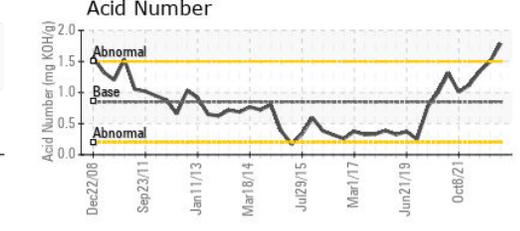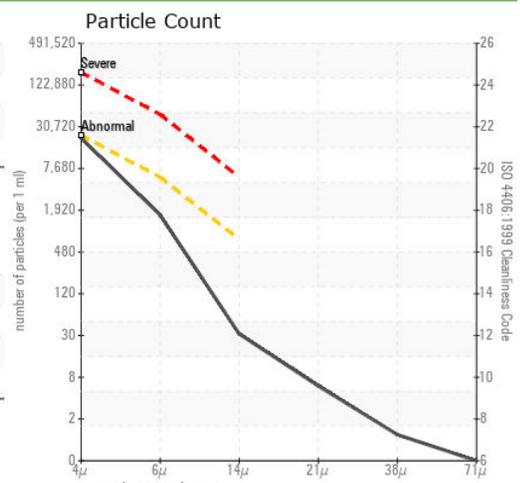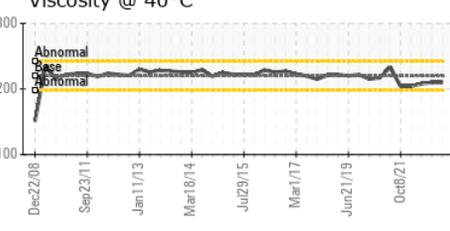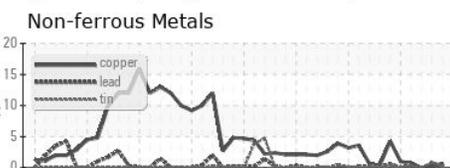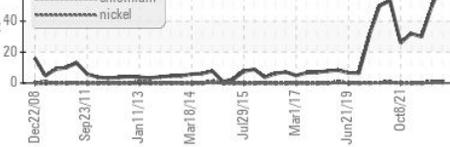

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0038093 **Received** : 30 Jan 2024
Lab Number : 06074732 **Diagnosed** : 01 Feb 2024
Unique Number : 10856823 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: PQ, PrtCount)

Kimberly-Clark - Mobile - TM 11
 200 BAYBRIDGE RD
 MOBILE, AL
 US 36610
 Contact: LARRY WEAVER
 Larry.D.Weaver@kcc.com
 T:
 F: (251)452-6335

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)