



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
MERCEDES-BENZ 24892-03

Component
Transmission
Fluid
ATF (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WCM2007267	---	---
Sample Date	Client Info		26 Jan 2024	---	---
Machine Age	mls	Client Info	0	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	165	---	---
Chromium	ppm	ASTM D5185m >10	1	---	---
Nickel	ppm	ASTM D5185m	1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >50	29	---	---
Lead	ppm	ASTM D5185m >50	<1	---	---
Copper	ppm	ASTM D5185m >200	10	---	---
Tin	ppm	ASTM D5185m >10	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	95	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	6	---	---
Magnesium	ppm	ASTM D5185m	16	---	---
Calcium	ppm	ASTM D5185m	252	---	---
Phosphorus	ppm	ASTM D5185m	299	---	---
Zinc	ppm	ASTM D5185m	4	---	---
Sulfur	ppm	ASTM D5185m	1494	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	12	---	---
Sodium	ppm	ASTM D5185m	7	---	---
Potassium	ppm	ASTM D5185m >20	4	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.72	---	---



OIL ANALYSIS REPORT

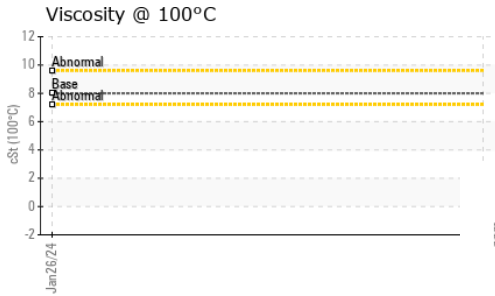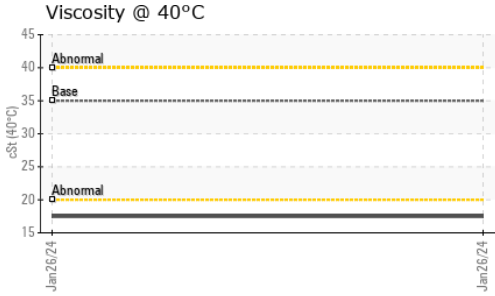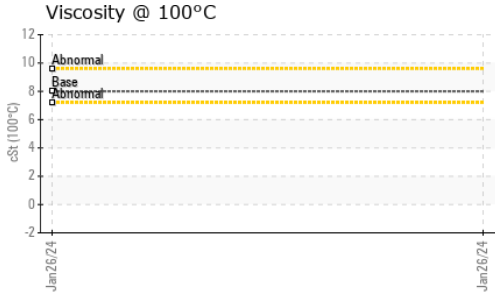









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	35.0	17.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

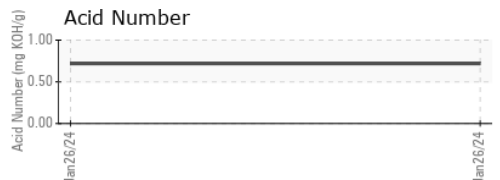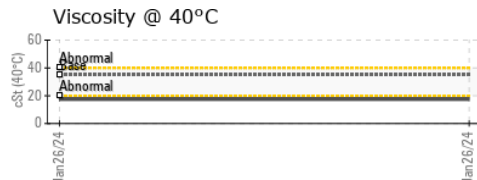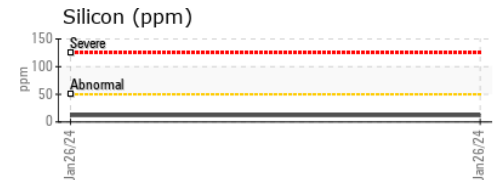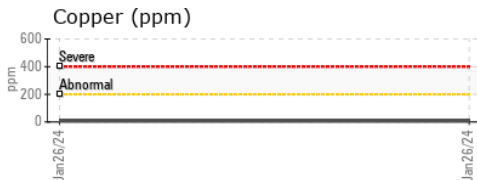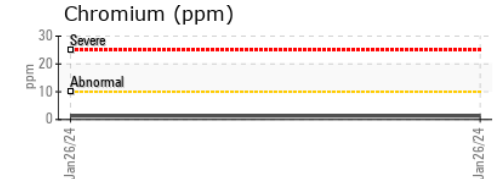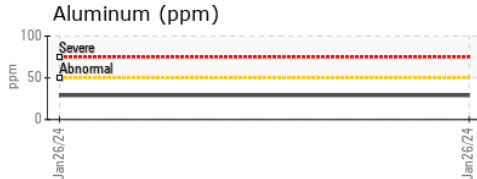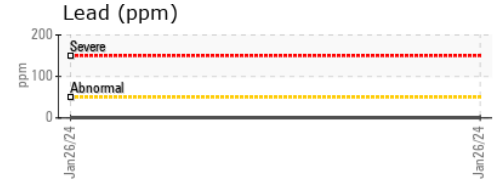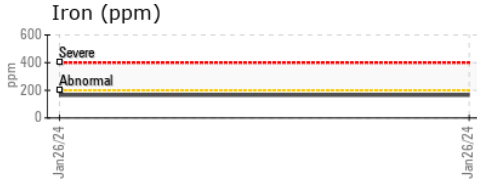

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCM2007267 **Recieved** : 30 Jan 2024
Lab Number : 06074979 **Diagnosed** : 02 Feb 2024
Unique Number : 10857070 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, KV100)

SOUTHERN AUTOMOTIVE CONSULTING
 P.O. BOX 730
 CREEDMOOR, NC
 US 27522
 Contact: ANDREW MORTON
 andymorton711@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: