




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[W49983]
 Machine Id
JOHN DEERE 824K 1DW824KXPKF694323
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

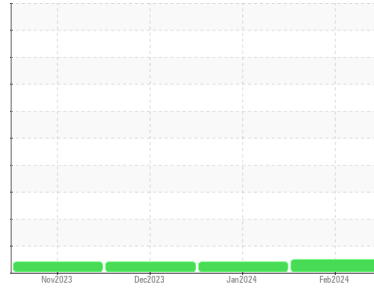

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0200307	JR0199787	JR0180718
Sample Date	Client Info		21 Feb 2024	29 Jan 2024	15 Dec 2023
Machine Age	hrs	Client Info	5029	4854	4354
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.21	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	8	10	13
Chromium	ppm	ASTM D5185m >11	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >31	4	3	3
Lead	ppm	ASTM D5185m >26	2	6	6
Copper	ppm	ASTM D5185m >26	5	7	10
Tin	ppm	ASTM D5185m >4	1	2	1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	252	192	213
Barium	ppm	ASTM D5185m	2	0	0
Molybdenum	ppm	ASTM D5185m	243	235	243
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m	755	782	792
Calcium	ppm	ASTM D5185m	1270	1207	1301
Phosphorus	ppm	ASTM D5185m	866	841	783
Zinc	ppm	ASTM D5185m	1022	1023	1003
Sulfur	ppm	ASTM D5185m	3312	2861	3070

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >22	9	8	8
Sodium	ppm	ASTM D5185m >31	3	0	0
Potassium	ppm	ASTM D5185m >20	3	3	2
Fuel	%	ASTM D3524 >2.1	<1.0	3.9	<1.0




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	7.2	8.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.4	22.1	22.2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.5	16.2	16.8
Base Number (BN)	mg KOH/g	ASTM D2896 13.6	9.0	7.7	8.1





OIL ANALYSIS REPORT

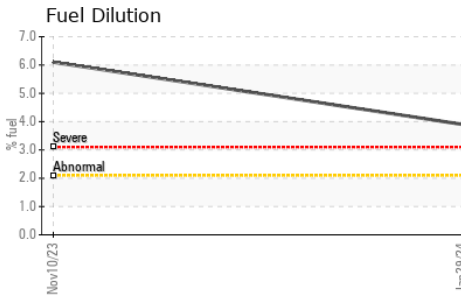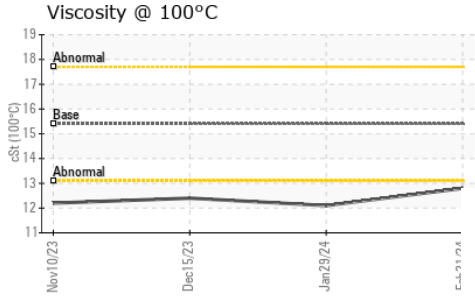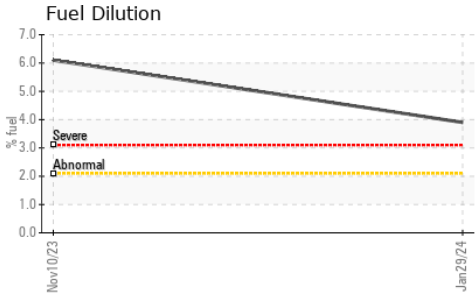

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	▲ 12.1 ▲ 12.4

GRAPHS

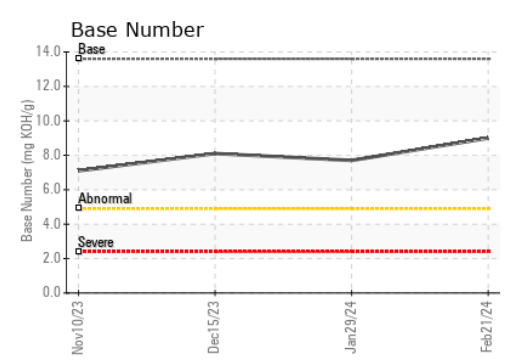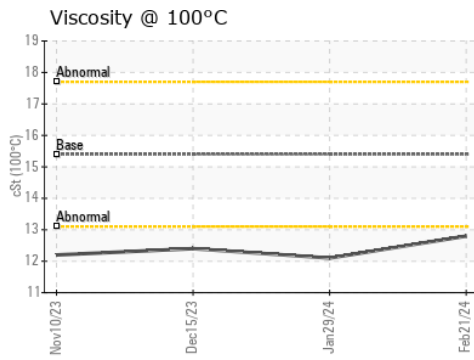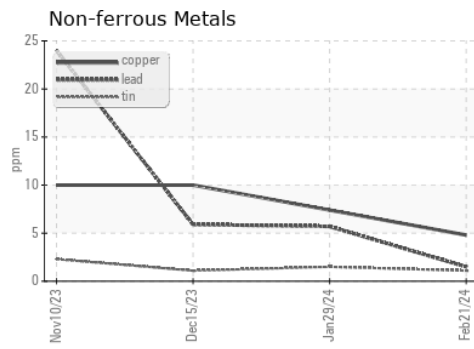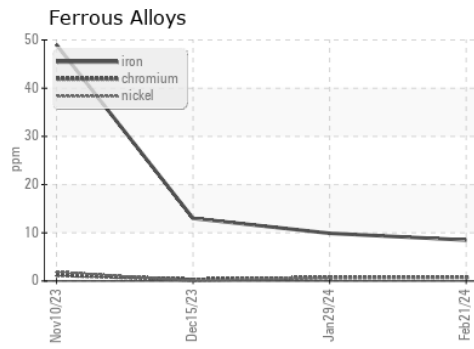

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200307 **Received** : 27 Feb 2024
Lab Number : **06101454** **Tested** : 29 Feb 2024
Unique Number : 10899684 **Diagnosed** : 29 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)