




# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Area  
**KANSAS/44/EG - DOZER**  
 Machine Id  
**35.110L [KANSAS^44^EG - DOZER]**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

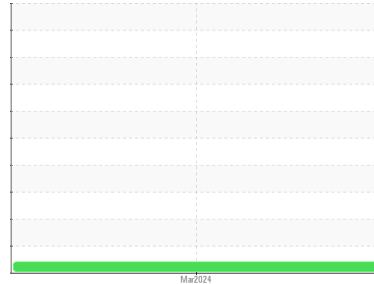

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0901267</b>	---	---
Sample Date	Client Info		<b>11 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>16</b>	---	---
Oil Age	hrs	Client Info	<b>16</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>11</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>68</b>	---	---
Barium	ppm	ASTM D5185m 10	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m 100	<b>36</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m 450	<b>485</b>	---	---
Calcium	ppm	ASTM D5185m 3000	<b>1711</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1023</b>	---	---
Zinc	ppm	ASTM D5185m 1350	<b>1163</b>	---	---
Sulfur	ppm	ASTM D5185m 4250	<b>3397</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>13</b>	---	---
Sodium	ppm	ASTM D5185m >158	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Fuel	%	ASTM D3524 >5	<b>0.3</b>	---	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.6</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.5</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>10.3</b>	---	---







# OIL ANALYSIS REPORT

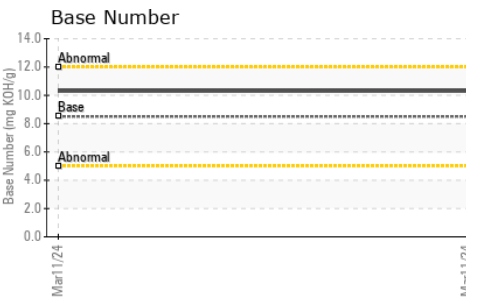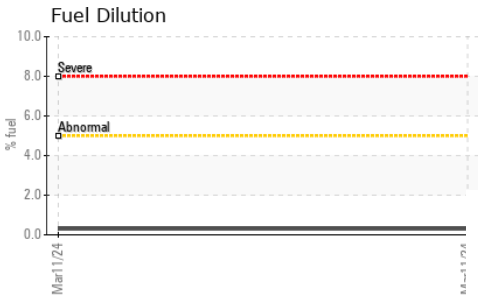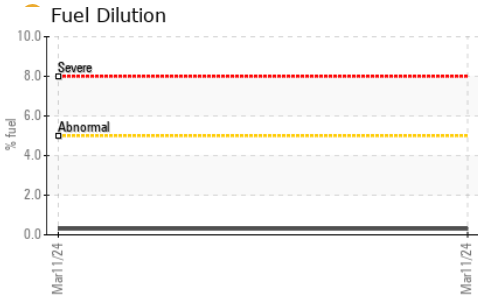

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	11.4	---

## GRAPHS

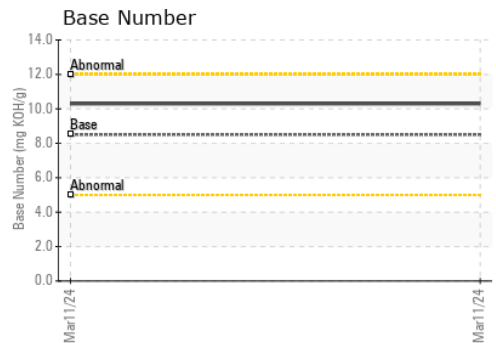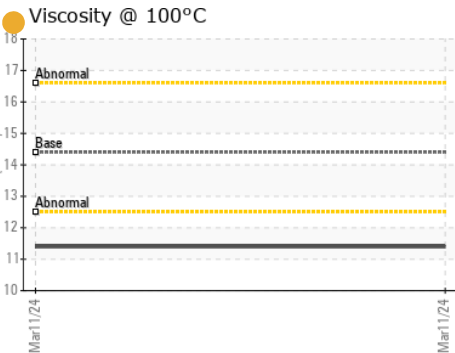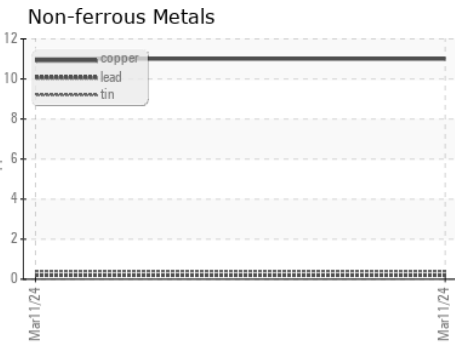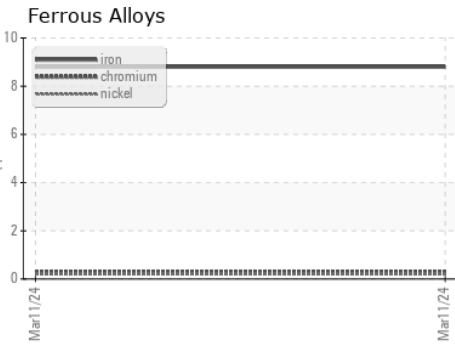

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0901267 Received : 18 Mar 2024  
 Lab Number : 06121425 Tested : 22 Mar 2024  
 Unique Number : 10930258 Diagnosed : 22 Mar 2024 - Don Baldrige  
 Test Package : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: BILL ORCUTT  
 william.orcutt@wildcat.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: