



# OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id  
**CATERPILLAR 745D 13399 (S/N 3T606049)**  
 Component  
**Center Differential**  
 Fluid  
**{not provided} (--- GAL)**



## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0888212</b>	---	---
Sample Date	Client Info		<b>14 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>2169</b>	---	---
Oil Age	hrs	Client Info	<b>2169</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>125</b>	---	---
Chromium	ppm	ASTM D5185m >3	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >30	<b>18</b>	---	---
Lead	ppm	ASTM D5185m >13	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >103	<b>▲ 246</b>	---	---
Tin	ppm	ASTM D5185m >5	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>4</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>9</b>	---	---
Calcium	ppm	ASTM D5185m	<b>3045</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1005</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1220</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>9199</b>	---	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>23</b>	---	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT

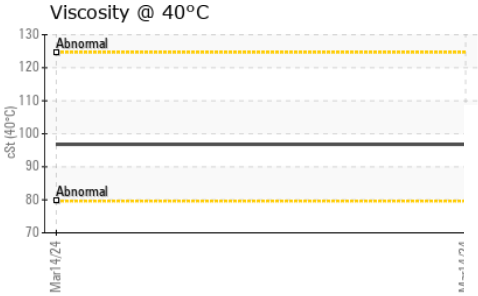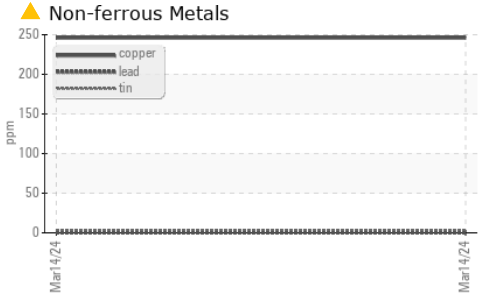




### FLUID PROPERTIES

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>96.8</b>	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS

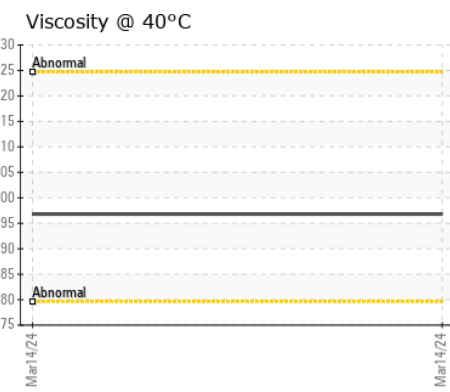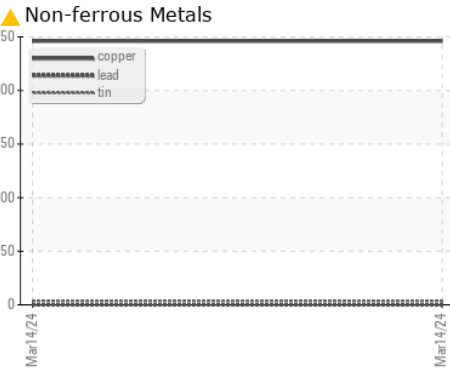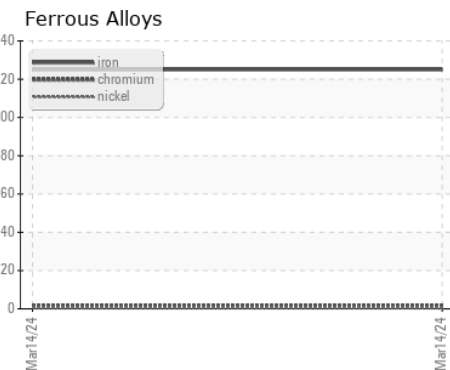

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0888212      **Received** : 19 Mar 2024  
**Lab Number** : **06122750**      **Tested** : 20 Mar 2024  
**Unique Number** : 10936901      **Diagnosed** : 21 Mar 2024 - Jonathan Hester  
**Test Package** : CONST

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mwyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)