




# OIL ANALYSIS REPORT

Sample Rating Trend

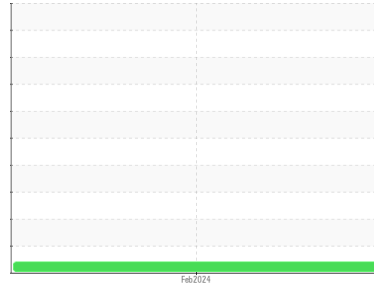

VISCOSITY



Machine Id  
**SZLG232935**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0880858</b>	---	---
Sample Date	Client Info		<b>20 Feb 2024</b>	---	---
Machine Age	hrs	Client Info	<b>8848</b>	---	---
Oil Age	hrs	Client Info	<b>8848</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>6</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>4</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>118</b>	---	---
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>63</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>421</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1847</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1046</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1203</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>4043</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	---	---
Sodium	ppm	ASTM D5185m >50	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---	---
Fuel	%	ASTM D3524 >5	<b>0.8</b>	---	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.2</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.0</b>	---	---







# OIL ANALYSIS REPORT

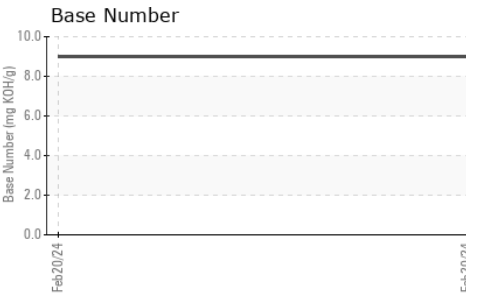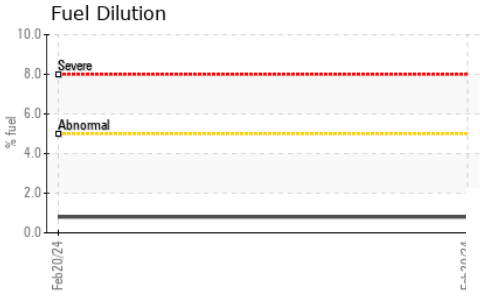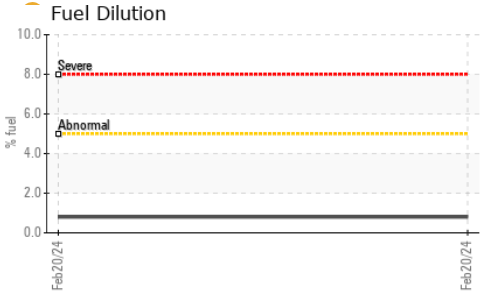

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	● 11.6	---	---

## GRAPHS

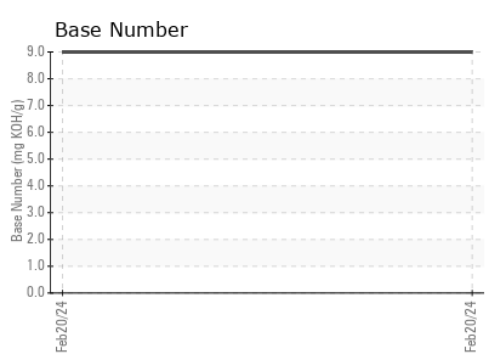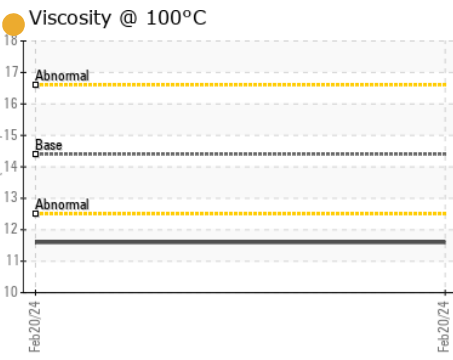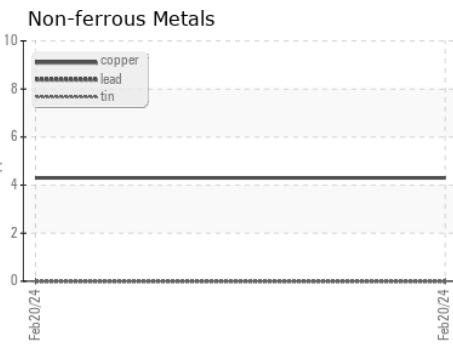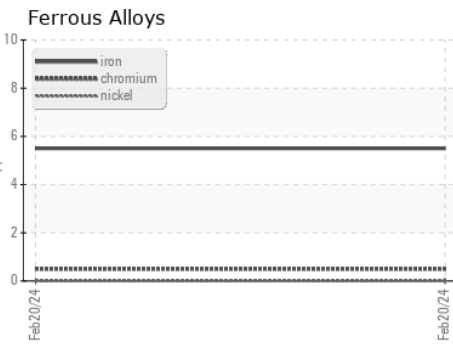

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0880858 **Received** : 19 Mar 2024  
**Lab Number** : 06122919 **Tested** : 22 Mar 2024  
**Unique Number** : 10937070 **Diagnosed** : 22 Mar 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**DOLE FRESH FRUIT**  
 PO BOX 1689  
 GULFPORT, MS  
 US 39502  
 Contact: JORDAN JOHNSTON  
 jordan.johnston@dole.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)