




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
CONSTRUCTORS, INC
 Machine Id
060979
 Component
Diesel Engine
 Fluid
PETRO CANADA 10W30 (--- GAL)

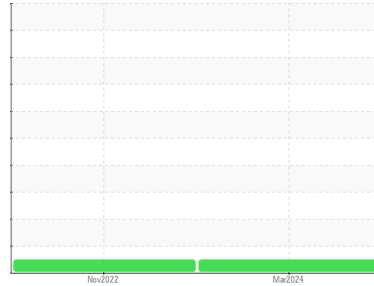

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0005709	SBP0002105	---
Sample Date	Client Info		08 Mar 2024	21 Nov 2022	---
Machine Age	hrs	Client Info	4622	4518	---
Oil Age	hrs	Client Info	364	260	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	44	32	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	4	10	---
Lead	ppm	ASTM D5185m	>40	3	0	---
Copper	ppm	ASTM D5185m	>330	12	5	---
Tin	ppm	ASTM D5185m	>15	1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		32	3	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		38	63	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		572	892	---
Calcium	ppm	ASTM D5185m		1452	1166	---
Phosphorus	ppm	ASTM D5185m		760	928	---
Zinc	ppm	ASTM D5185m		918	1213	---
Sulfur	ppm	ASTM D5185m		2809	3222	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	11	6	---
Sodium	ppm	ASTM D5185m		2	1	---
Potassium	ppm	ASTM D5185m	>20	12	11	---

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.6	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	9.1	11.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.3	24.2	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.0	21.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	9.5	---







OIL ANALYSIS REPORT

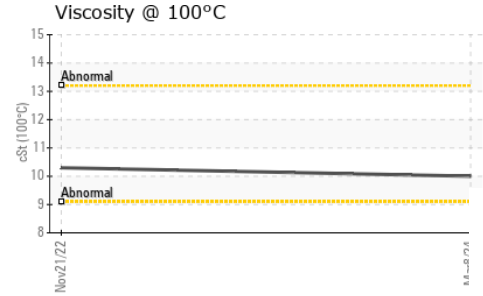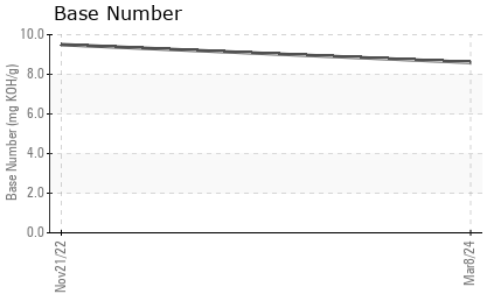

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.0	10.3	---

GRAPHS

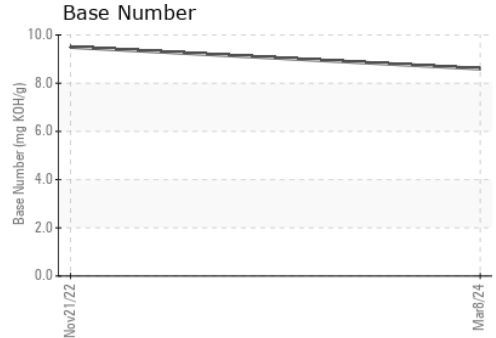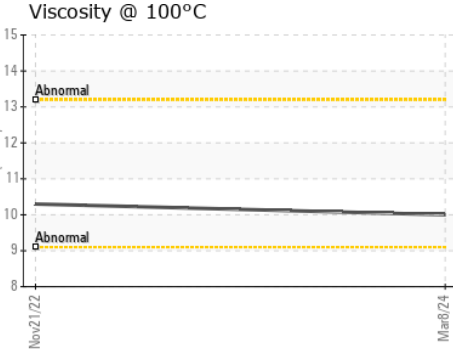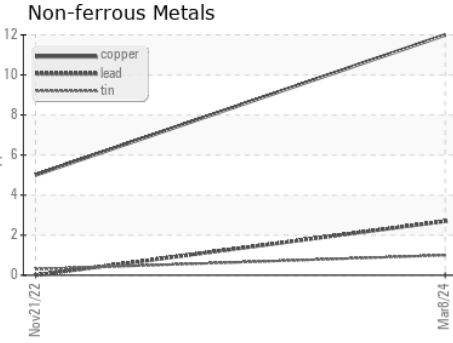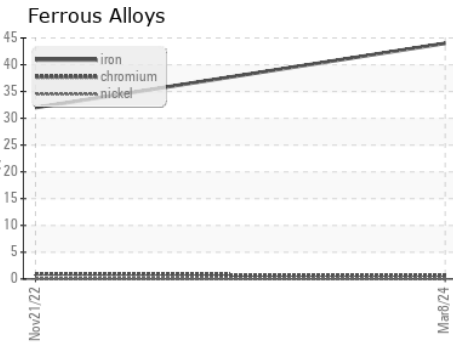

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005709 **Received** : 20 Mar 2024
Lab Number : **06124155** **Tested** : 21 Mar 2024
Unique Number : 10938306 **Diagnosed** : 21 Mar 2024 - Wes Davis
Test Package : FLEET

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Loren Michael
 LorenM@constructorslincoln.com
 T: (402)434-2157
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)