




OIL ANALYSIS REPORT

Sample Rating Trend

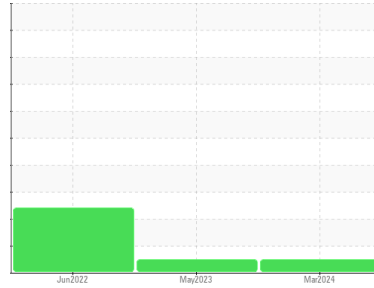

NORMAL



Area
VIAM/Shredding Room
 Machine Id
[VIAM^Shredding Room] ELUTRATION SHREDDER
 Component
Gearbox
 Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KFS0005077	KFS0002208	KFS0000693
Sample Date	Client Info	18 Mar 2024	16 May 2023	28 Jun 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	1	<1	<1
Chromium	ppm ASTM D5185m >15	<1	<1	0
Nickel	ppm ASTM D5185m >15	0	0	0
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m	<1	<1	0
Aluminum	ppm ASTM D5185m >25	3	<1	0
Lead	ppm ASTM D5185m >100	0	0	0
Copper	ppm ASTM D5185m >200	5	4	4
Tin	ppm ASTM D5185m >25	<1	0	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	0	0
Barium	ppm ASTM D5185m 0	1	0	0
Molybdenum	ppm ASTM D5185m 0	0	<1	0
Manganese	ppm ASTM D5185m 0	0	<1	<1
Magnesium	ppm ASTM D5185m 0	<1	0	0
Calcium	ppm ASTM D5185m 50	27	32	41
Phosphorus	ppm ASTM D5185m 330	294	321	350
Zinc	ppm ASTM D5185m 430	308	343	413
Sulfur	ppm ASTM D5185m 760	1147	727	963


CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<1	<1	0
Sodium	ppm ASTM D5185m	0	<1	<1
Potassium	ppm ASTM D5185m >20	2	0	0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.60	0.41	0.28	0.24


OIL ANALYSIS REPORT

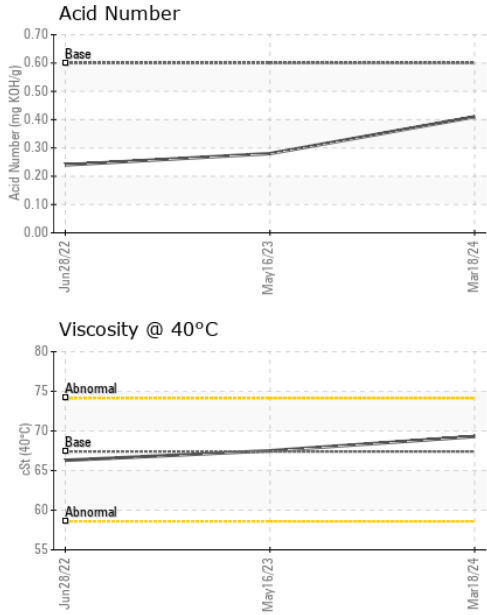





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67.4	69.3	67.5	66.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

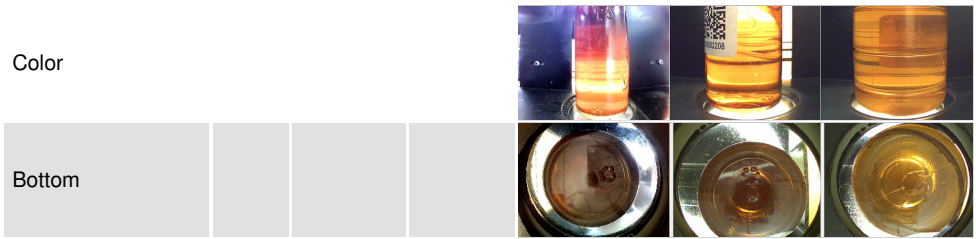

GRAPHS

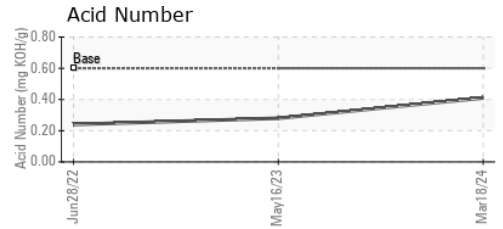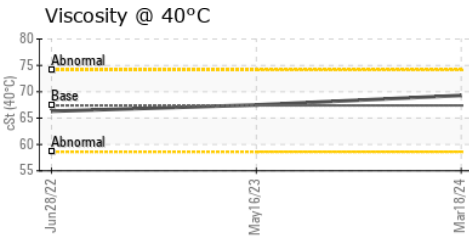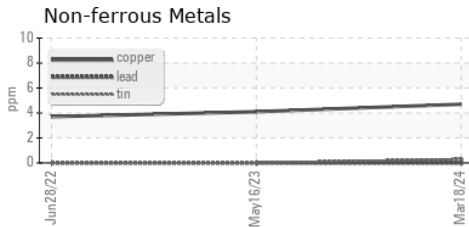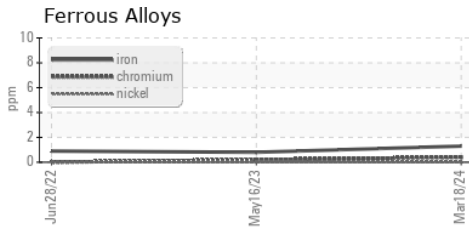

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KFS0005077
Lab Number : **06125090**
Unique Number : 10939241
Test Package : IND 2

Received : 21 Mar 2024
Tested : 24 Mar 2024
Diagnosed : 24 Mar 2024 - Wes Davis

VIAM/VICAM Manufacturing - Tennessee
 87 Parktower Road
 Manchester, TN
 US 37355
 Contact: Eric Thompson
 ethompson@viammfg.com
 T: (931)461-2300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)