




OIL ANALYSIS REPORT

Sample Rating Trend

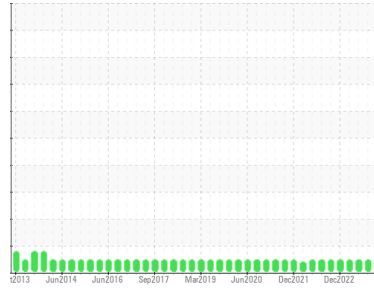

NORMAL



Machine Id
GTRB-1510B Main Gas Compressor
 Component
Tank Sealing System
 Fluid
PHILLIPS 66 Diamond Class® Turbine Oil AW 32 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	HLC0003087	HLC0003097	HLC0002668
Sample Date	Client Info	22 Mar 2024	03 Jan 2024	10 Jun 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	0	0	0
Chromium	ppm	ASTM D5185m	<1	<1	0
Nickel	ppm	ASTM D5185m	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	<1	<1	0
Aluminum	ppm	ASTM D5185m	2	2	1
Lead	ppm	ASTM D5185m	<1	<1	0
Copper	ppm	ASTM D5185m	<1	<1	0
Tin	ppm	ASTM D5185m	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	4
Molybdenum	ppm	ASTM D5185m	<1	<1	0
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m	<1	<1	<1
Calcium	ppm	ASTM D5185m	4	3	0
Phosphorus	ppm	ASTM D5185m	23	23	21
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m	1065	1075	1080

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	1	1	0
Sodium	ppm	ASTM D5185m	0	0	<1
Potassium	ppm	ASTM D5185m	>20	1	0





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	766	1195	309
Particles >6µm	ASTM D7647	>1300	403	79
Particles >14µm	ASTM D7647	>160	25	10
Particles >21µm	ASTM D7647	>40	8	2
Particles >38µm	ASTM D7647	>10	0	0
Particles >71µm	ASTM D7647	>3	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/14	17/16/12	15/13/10

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.04	0.14	0.12	0.12


OIL ANALYSIS REPORT

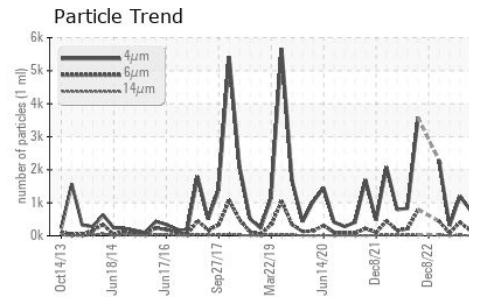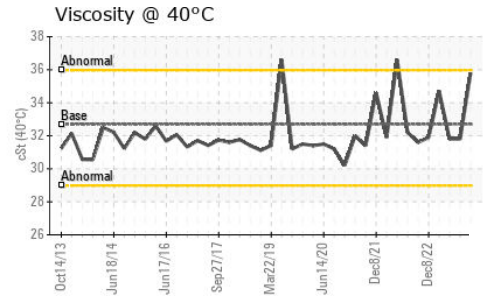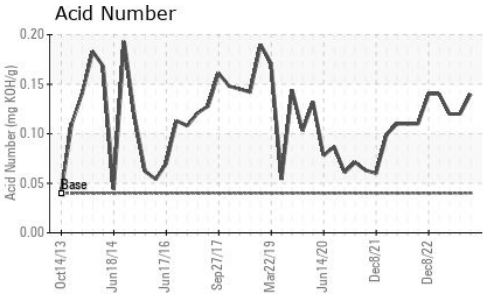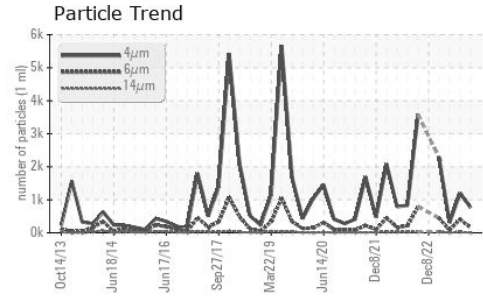






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 32.7	35.8	31.8	31.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

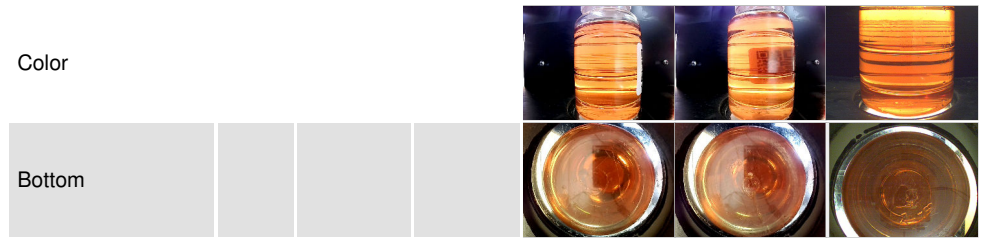

GRAPHS

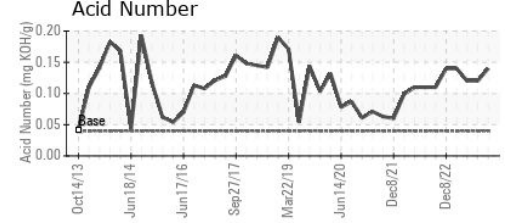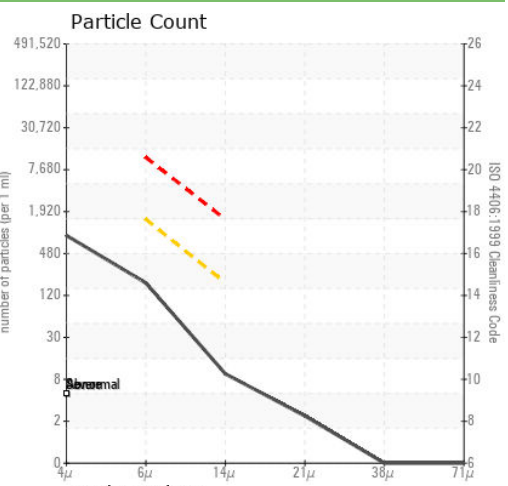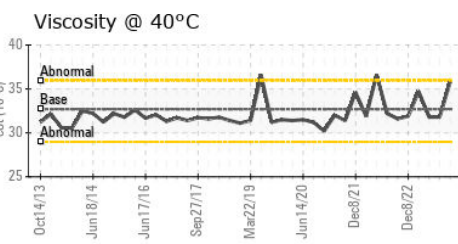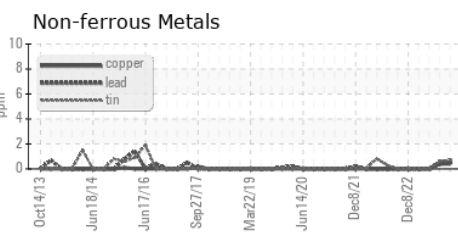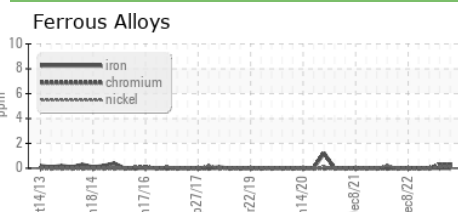

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HLC0003087
Lab Number : **06131375**
Unique Number : 10950840
Test Package : IND 2 (Additional Tests: PrtCount)

HILCORP ALASKA LLC - ENDICOTT
 604 WAREHOUSE ENDICOTT
 PRUDHOE BAY, AK
 US 99734
 Contact: SEAN LOWTHER
 slowther@hilcorp.com
 T: (907)659-6800
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)