




OIL ANALYSIS REPORT

Sample Rating Trend

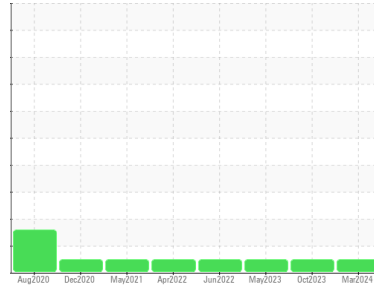

NORMAL



Machine Id
441368

Component
Diesel Engine

Fluid
MOBIL DELVAC 1300 SUPER15W40 (42 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		IL0030601	IL0030494	IL0026573
Sample Date	Client Info		28 Mar 2024	19 Oct 2023	13 May 2023
Machine Age	mls	Client Info	111302	101504	92304
Oil Age	mls	Client Info	0	74093	27411
Oil Changed	Client Info		N/A	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	32	29	45
Chromium	ppm	ASTM D5185m >20	<1	<1	2
Nickel	ppm	ASTM D5185m >4	1	0	<1
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	23	5	22
Lead	ppm	ASTM D5185m >40	1	<1	2
Copper	ppm	ASTM D5185m >330	0	1	2
Tin	ppm	ASTM D5185m >15	2	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	5	3	3
Barium	ppm	ASTM D5185m 0	0	5	0
Molybdenum	ppm	ASTM D5185m 0	62	63	63
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m 0	937	908	891
Calcium	ppm	ASTM D5185m	1082	1050	1206
Phosphorus	ppm	ASTM D5185m	1031	983	1000
Zinc	ppm	ASTM D5185m	1242	1187	1241
Sulfur	ppm	ASTM D5185m	3645	3449	3134

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	7	8
Sodium	ppm	ASTM D5185m	<1	1	0
Potassium	ppm	ASTM D5185m >20	13	12	62

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.4	1.1	2.1
Nitration	Abs/cm	*ASTM D7624 >20	8.1	8.1	12.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.8	21.2	25.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.7	15.4	19.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	9.4	9.5	8.3







OIL ANALYSIS REPORT

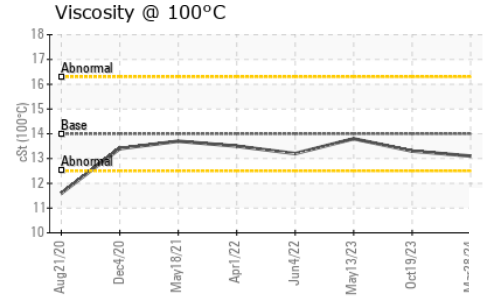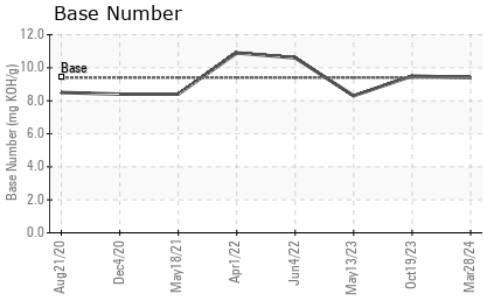

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.1	13.3	13.8

GRAPHS

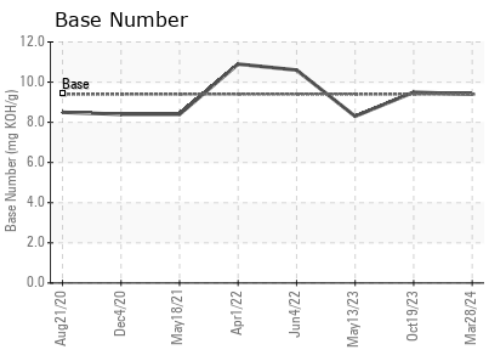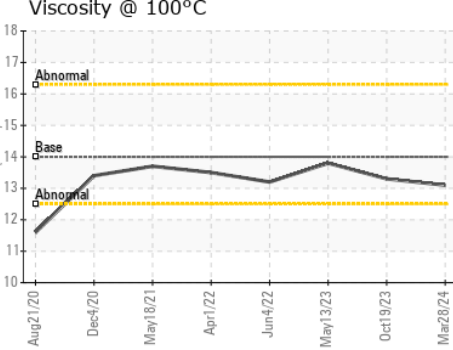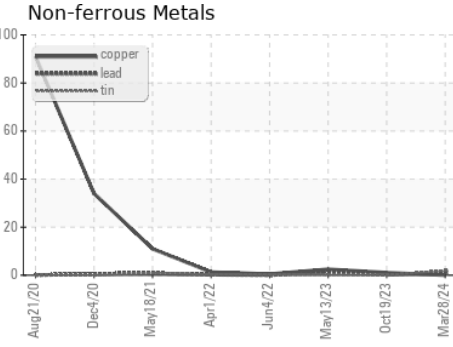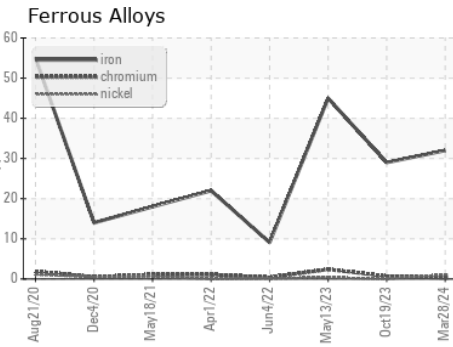

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0030601
Lab Number : 06133092
Unique Number : 10952557
Test Package : FLEET
Received : 29 Mar 2024
Tested : 01 Apr 2024
Diagnosed : 02 Apr 2024 - Don Baldrige

RUSH TRUCK LEASING - CHARLOTTE IDEALEASE
 1333 AMERON DR
 CHARLOTTE, NC
 US 28206
 Contact: JERRY DIXON
 dixonj@rushenterprises.com
 T: (704)333-4507
 F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)