

## **OIL ANALYSIS REPORT**

### NORMA

Machine Id 4SC-7 (S/N 1801E) Refrigeration Compressor USPI ALT-68 SC (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			1003000000	
			1111111	
			100100000	
	888888888888			
Sep2012	Mar2015 Dec2017	Aug2019 Jan2021	Jan2023	

2008 Jun2010 Sep201	12 Mar2015 Dec201	Jan2023

SAMPLE INFORM	IATION	method				history2
Sample Number		Client Info		USP0007927	USP0005213	USP0000303
Sample Date		Client Info		03 Apr 2024	08 Jan 2024	31 Aug 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
	_	_				
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	0
Chromium	ppm	ASTM D5185m	>2	0	<1	0
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	<1	<1
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	1
Sodium	ppm	ASTM D5185m		0	0	3
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water	%	ASTM D6304		0.001	0.003	0.001
ppm Water	ppm	ASTM D6304	>100	11	37	11.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1279	4675	1328
Particles >6µm		ASTM D7647	>2500	231	1157	346
Particles >14µm		ASTM D7647	>320	14	47	57
Particles >21µm		ASTM D7647	>80	5	7	18
Particles >38µm		ASTM D7647	>20	1	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	0 17/15/11	19/17/13	18/16/13
	TION	( )				
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015

Contact/Location: MIKE QUEEN - TYSWILFRE





Water


60


har

# **OIL ANALYSIS REPORT**

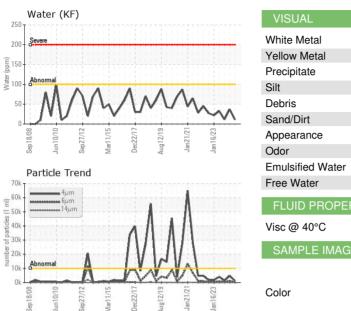








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.6	67.8	67.3	68.3
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color				•		
Bottom					(0)	

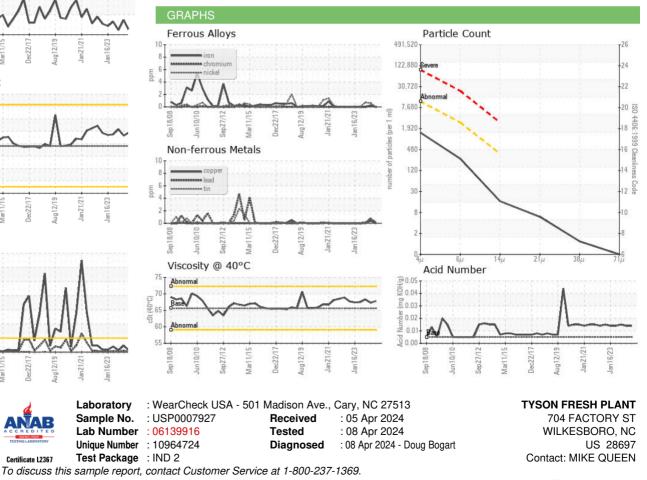

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (336)838-2171 F:

Report Id: TYSWILFRE [WUSCAR] 06139916 (Generated: 04/08/2024 10:04:07) Rev: 1

Contact/Location: MIKE QUEEN - TYSWILFRE