




OIL ANALYSIS REPORT

Sample Rating Trend

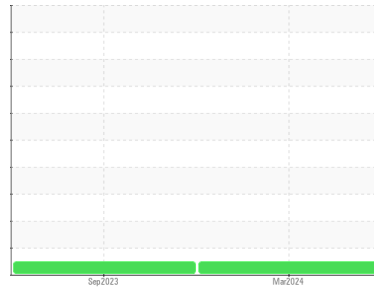

NORMAL



Area
AIR HYDRO POWER
 Machine Id
AIR HYDRO POWER 2
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 32 (100 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PH0002140	PH0002143	---
Sample Date	Client Info			01 Mar 2024	11 Sep 2023	---
Machine Age	mths	Client Info		0	0	---
Oil Age	mths	Client Info		0	0	---
Oil Changed	Client Info			Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>20	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	0	---
Lead	ppm	ASTM D5185m	>20	<1	0	---
Copper	ppm	ASTM D5185m	>20	10	10	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	<1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<1	0	---
Barium	ppm	ASTM D5185m	5	0	0	---
Molybdenum	ppm	ASTM D5185m	5	<1	<1	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	25	2	0	---
Calcium	ppm	ASTM D5185m	200	57	53	---
Phosphorus	ppm	ASTM D5185m	300	341	322	---
Zinc	ppm	ASTM D5185m	370	428	389	---
Sulfur	ppm	ASTM D5185m	2500	904	1024	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	2	---
Sodium	ppm	ASTM D5185m		3	2	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---





FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	4072	802	---
Particles >6µm		ASTM D7647	>1300	190	134	---
Particles >14µm		ASTM D7647	>160	7	8	---
Particles >21µm		ASTM D7647	>40	2	1	---
Particles >38µm		ASTM D7647	>10	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/15/10	17/14/10	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.38	0.35	---

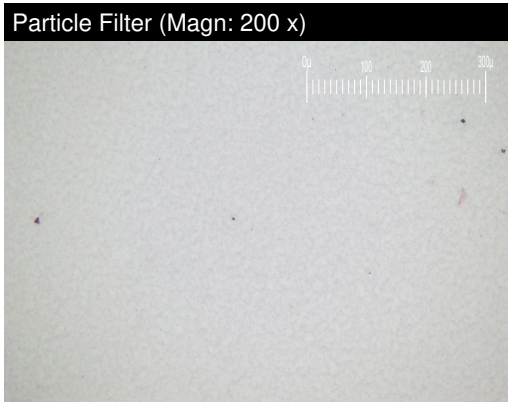




OIL ANALYSIS REPORT

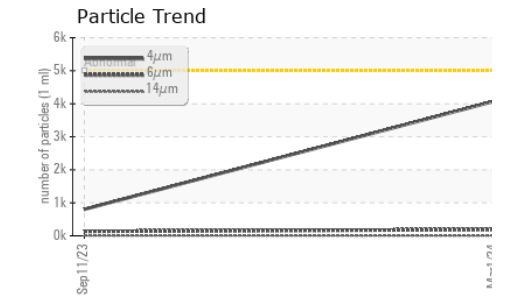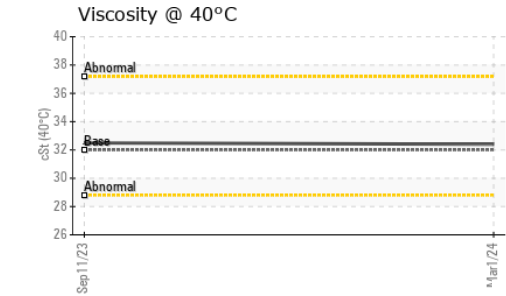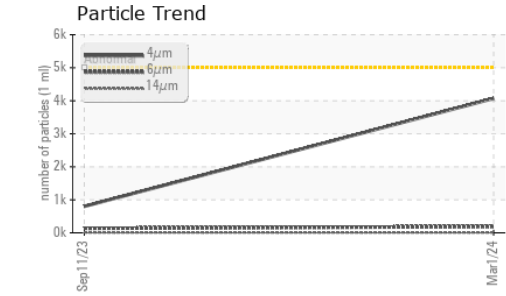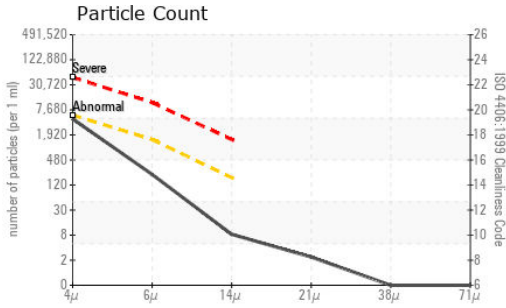






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 32	32.4	32.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

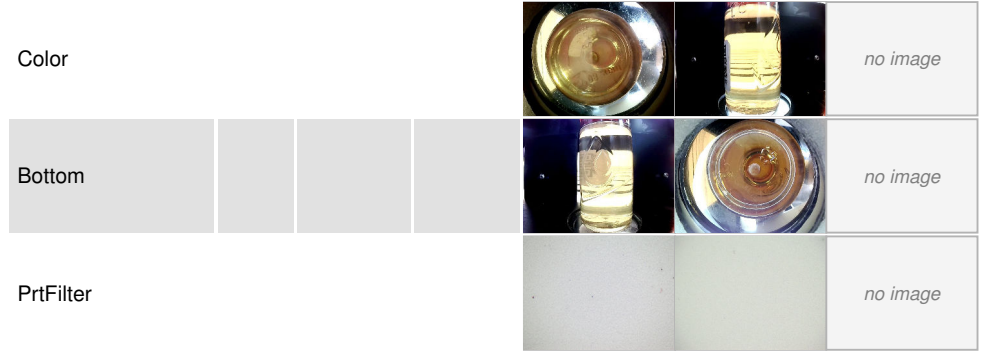

GRAPHS

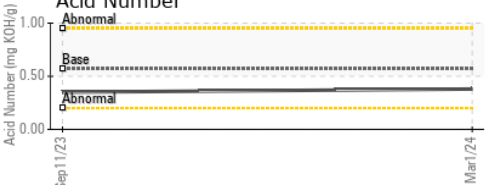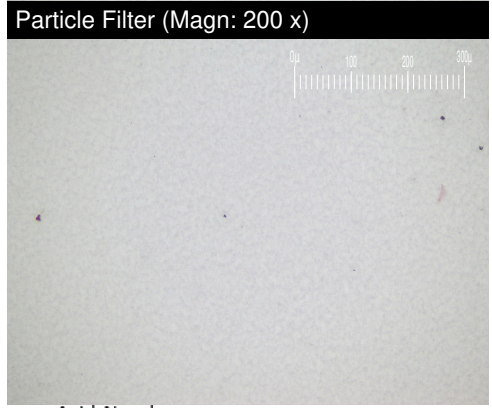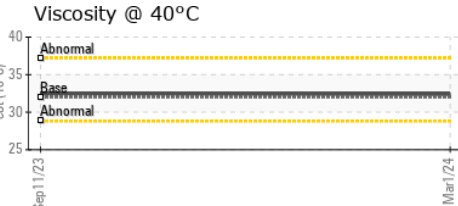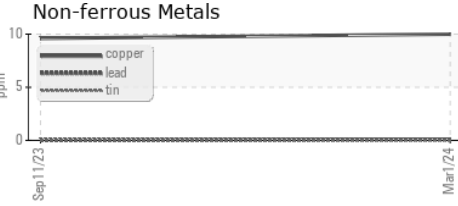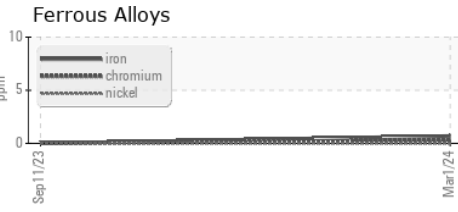

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0002140 **Received** : 08 Apr 2024
Lab Number : 06141299 **Tested** : 11 Apr 2024
Unique Number : 10966107 **Diagnosed** : 11 Apr 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: PrtFilter)

PARKER HANNIFIN CORPORATION-OIL LAB
 501 MADISON AVENUE
 CARY, NC 27513
 US 27513
 Contact: JAY GRONBACH
 jay.gronbach@parker.com