




OIL ANALYSIS REPORT

Sample Rating Trend

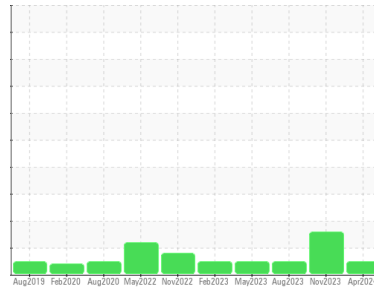

NORMAL



Machine Id
KAESER BSD 60T 6474554 (S/N 1249)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA015397	KCPA004694	KCPA005987
Sample Date	Client Info			01 Apr 2024	02 Nov 2023	11 Aug 2023
Machine Age	hrs Client Info			22563	28073	18674
Oil Age	hrs Client Info			233	0	0
Oil Changed	Client Info			Changed	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	1	2	<1
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	<1






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	61	0	50
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	73	0	72
Calcium	ppm	ASTM D5185m	2	6	0	1
Phosphorus	ppm	ASTM D5185m		2	0	3
Zinc	ppm	ASTM D5185m		4	0	2
Sulfur	ppm	ASTM D5185m		21830	20049	23651

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	2
Sodium	ppm	ASTM D5185m		24	26	26
Potassium	ppm	ASTM D5185m	>20	7	5	6
Water	%	ASTM D6304	>0.05	0.018	0.027	0.032
ppm Water	ppm	ASTM D6304	>500	182	271.0	329.1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1914	4711	2569
Particles >6µm		ASTM D7647	>1300	523	● 1320	707
Particles >14µm		ASTM D7647	>80	39	● 104	73
Particles >21µm		ASTM D7647	>20	11	● 22	22
Particles >38µm		ASTM D7647	>4	0	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	18/16/12	● 19/18/14	19/17/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.31	0.35


OIL ANALYSIS REPORT

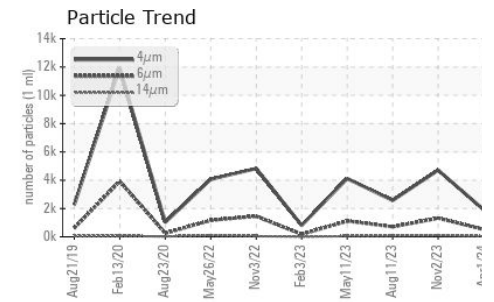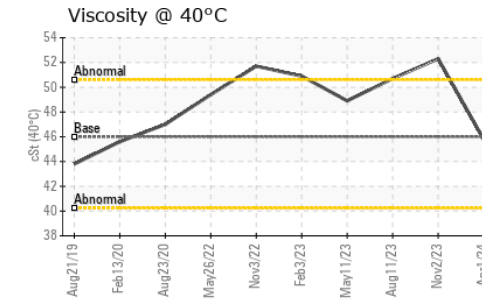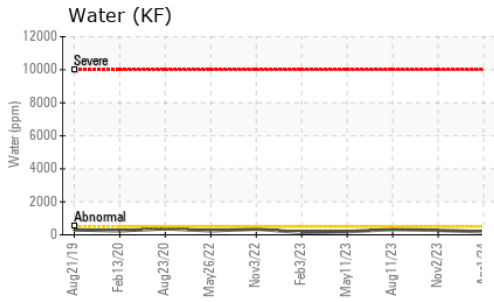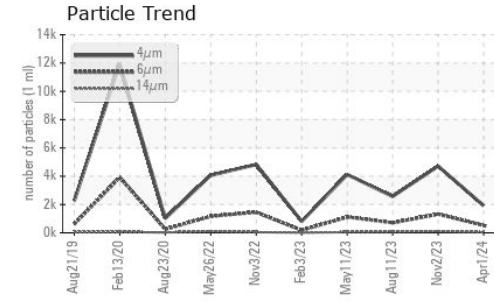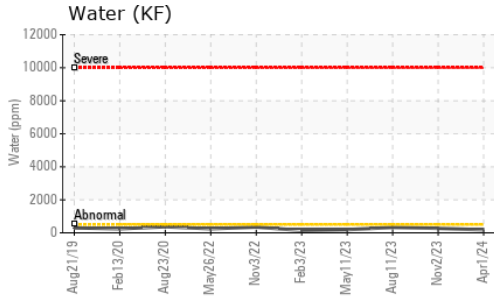






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.8	52.3	50.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

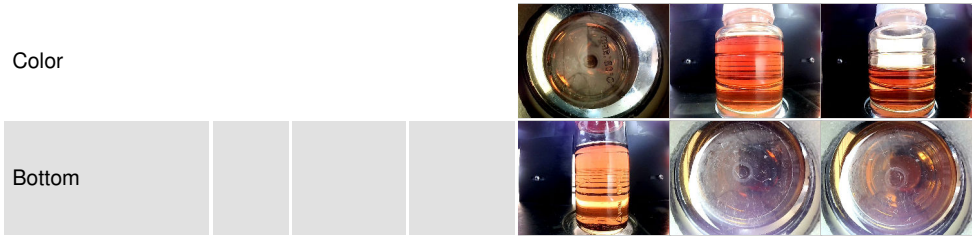

GRAPHS

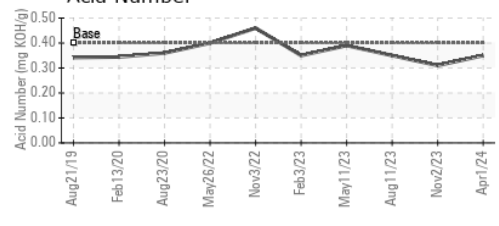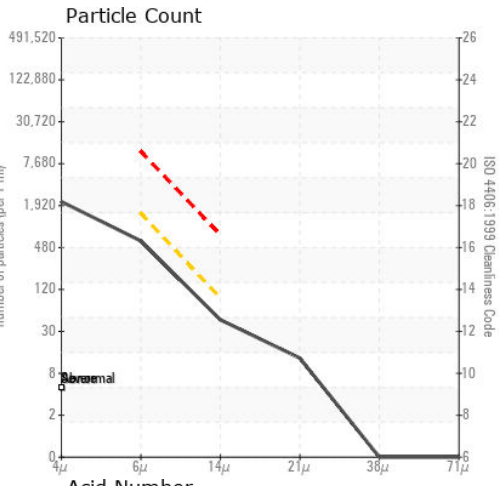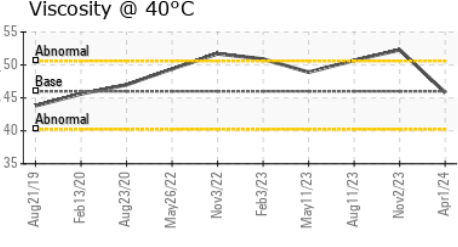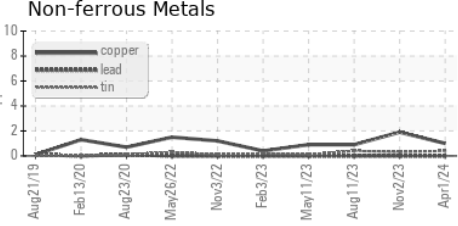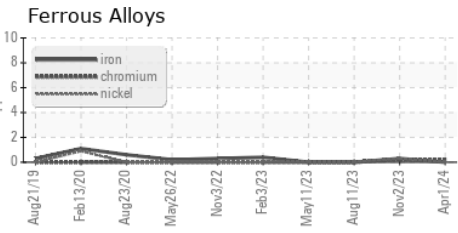

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA015397 **Received** : 08 Apr 2024
Lab Number : 06142306 **Tested** : 09 Apr 2024
Unique Number : 10967114 **Diagnosed** : 10 Apr 2024 - Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

AMAZON SERVICES
 409 WASHINGTON AVE
 NORTH HAVEN, CT
 US 06473
 Contact: SERVICE MANAGER
 lucastra@amazon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)