





Machine Id
TB-5 REDUCER
Component
Gearbox
Fluid
CHEVRON MEROPA 220 (20 GAL)

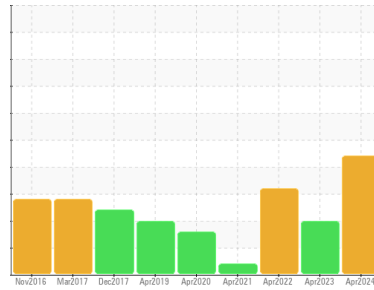

COMPONENT CONDITION SUMMARY

▲ Particle Trend

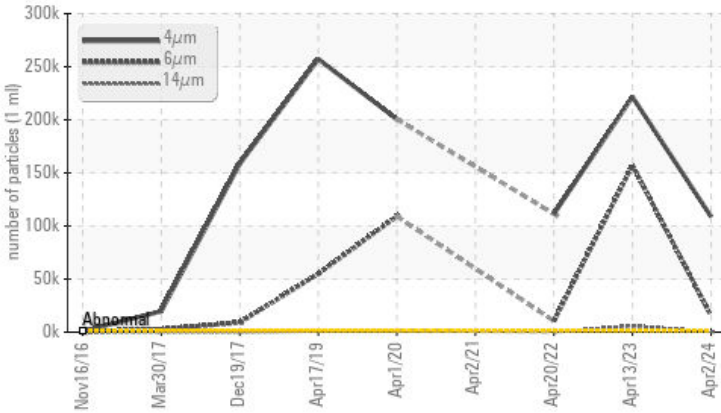

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	ABNORMAL	SEVERE
Particles >4µm	ASTM D7647	>1300	▲ 108919	▲ 221616	▲ 111348
Particles >6µm	ASTM D7647	>320	▲ 15505	▲ 157190	▲ 10500
Particles >14µm	ASTM D7647	>80	▲ 352	▲ 5915	● 93
Particles >21µm	ASTM D7647	>20	▲ 60	▲ 220	13
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 24/21/16	▲ 25/24/20	▲ 24/21/14

Customer Id: HYDBELFL
Sample No.: ST43263
Lab Number: 06143042
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS



13 Apr 2023 Diag: Jonathan Hester

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Please note that this is a corrected copy for diagnostic comment updates. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



20 Apr 2022 Diag: Wes Davis

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. All component wear rates are normal. Particles >6µm are severely high. Particles >4µm are severely high. Particles >14µm are notably high. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



02 Apr 2021 Diag: Don Baldrige


We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid.

view report





Machine Id
TB-5 REDUCER
 Component
Gearbox
 Fluid
CHEVRON MEROPA 220 (20 GAL)

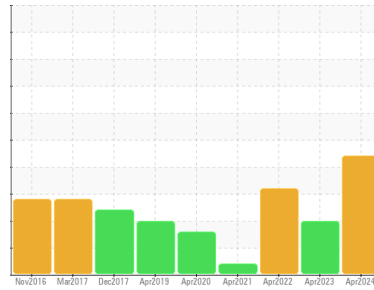

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ST43263	ST44782	ST42877
Sample Date	Client Info		02 Apr 2024	13 Apr 2023	20 Apr 2022
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			SEVERE	ABNORMAL	SEVERE

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	37	148	79
Chromium	ppm	ASTM D5185m >15	0	<1	<1
Nickel	ppm	ASTM D5185m >15	0	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	1	4	2
Lead	ppm	ASTM D5185m >100	0	0	<1
Copper	ppm	ASTM D5185m >200	1	4	5
Tin	ppm	ASTM D5185m >25	<1	0	<1
Antimony	ppm	ASTM D5185m >5	---	---	---
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 40	0	0	<1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	1	2	<1
Magnesium	ppm	ASTM D5185m	3	2	0
Calcium	ppm	ASTM D5185m	16	8	<1
Phosphorus	ppm	ASTM D5185m 270	155	132	128
Zinc	ppm	ASTM D5185m	15	7	0
Sulfur	ppm	ASTM D5185m 8600	11913	10783	8419

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	7	9	7
Sodium	ppm	ASTM D5185m	2	2	0
Potassium	ppm	ASTM D5185m >20	0	<1	2
Water	%	ASTM D6304 >0.2	0.021	0.008	0.003
ppm Water	ppm	ASTM D6304 >2000	213	85.8	34.5






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	▲ 108919	▲ 221616	▲ 111348
Particles >6µm	ASTM D7647	>320	▲ 15505	▲ 157190	▲ 10500
Particles >14µm	ASTM D7647	>80	▲ 352	▲ 5915	● 93
Particles >21µm	ASTM D7647	>20	▲ 60	▲ 220	13
Particles >38µm	ASTM D7647	>4	2	4	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 24/21/16	▲ 25/24/20	▲ 24/21/14

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.64	0.23	0.39	0.43


OIL ANALYSIS REPORT

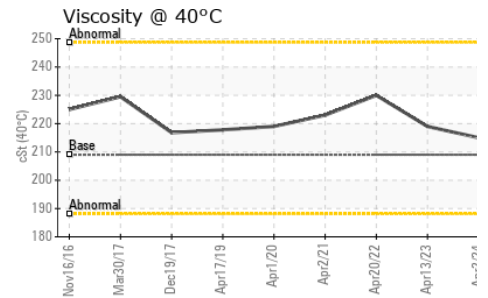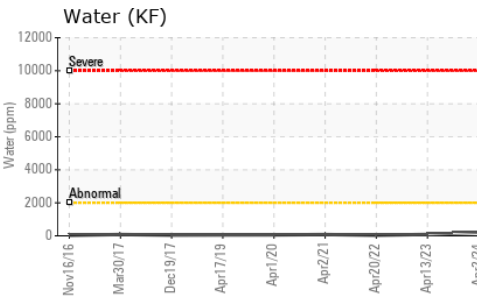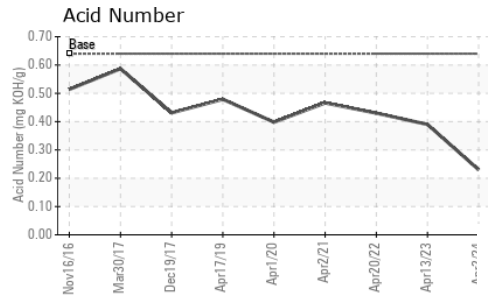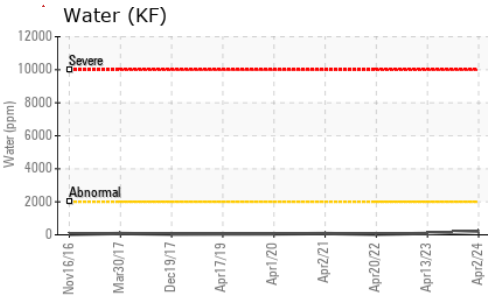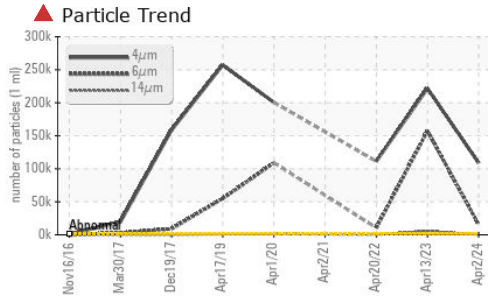






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	209	215	219

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

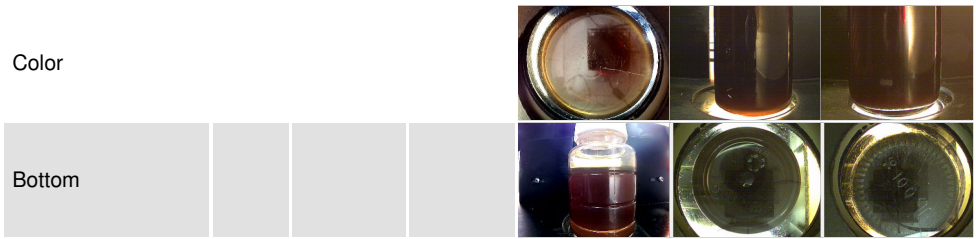

GRAPHS

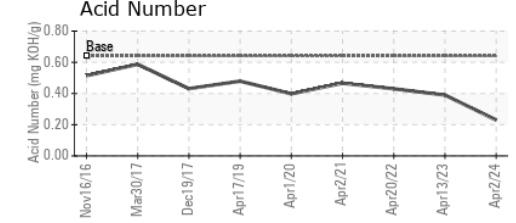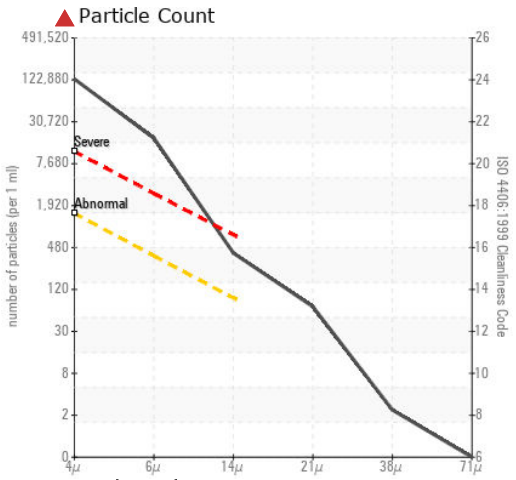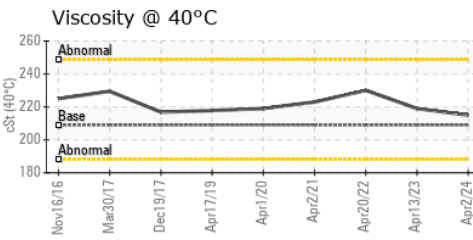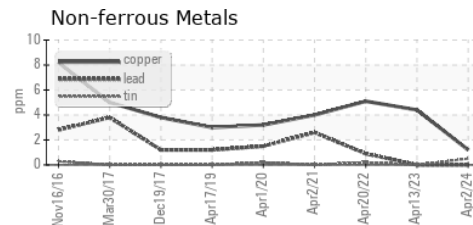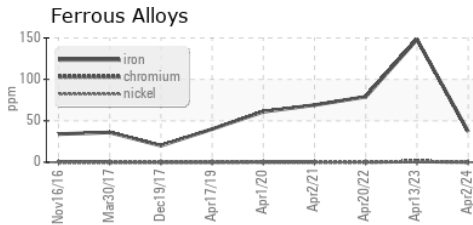

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ST43263
Lab Number : 06143042
Unique Number : 10967850
Test Package : IND 2 (Additional Tests: KF, PrtCount)
Received : 09 Apr 2024
Tested : 10 Apr 2024
Diagnosed : 10 Apr 2024 - Wes Davis

HYDRAULIC SUPPLY COMPANY
 326 SE 1ST ST
 BELLE GLADE, FL
 US 33430

Contact: ROBERT RETALEATO
 r.retaleato@hydraulic-supply.com; rrs@hydraulic-supply.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (561)996-4431

F: (561)996-8531