




OIL ANALYSIS REPORT

Sample Rating Trend

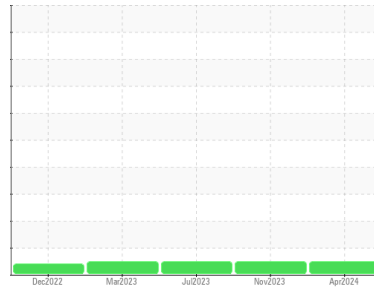

NORMAL



Area
SCHTRUCK
 Machine Id
6390 [SCHTRUCK]
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0007005	SBP0006002	SBP0004728
Sample Date	Client Info		05 Apr 2024	21 Nov 2023	18 Jul 2023
Machine Age	mls	Client Info	188292	147693	107791
Oil Age	mls	Client Info	40599	39902	37227
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	30	31	36
Chromium	ppm	ASTM D5185m >5	3	3	3
Nickel	ppm	ASTM D5185m >2	1	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	<1	<1	0
Aluminum	ppm	ASTM D5185m >30	11	18	33
Lead	ppm	ASTM D5185m >30	<1	0	0
Copper	ppm	ASTM D5185m >150	13	22	34
Tin	ppm	ASTM D5185m >5	1	1	1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	1	0
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	68	65	66
Manganese	ppm	ASTM D5185m 0	1	1	1
Magnesium	ppm	ASTM D5185m 1010	1097	1026	1054
Calcium	ppm	ASTM D5185m 1070	1221	1113	1238
Phosphorus	ppm	ASTM D5185m 1150	1085	1079	1016
Zinc	ppm	ASTM D5185m 1270	1399	1376	1289
Sulfur	ppm	ASTM D5185m 2060	2789	2427	2648

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	5	6
Sodium	ppm	ASTM D5185m	3	2	4
Potassium	ppm	ASTM D5185m >20	20	36	71

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.7	0.6
Nitration	Abs/cm	*ASTM D7624 >20	9.5	9.9	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.1	22.3	22.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.9	20.6	20.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.7	6.0	5.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

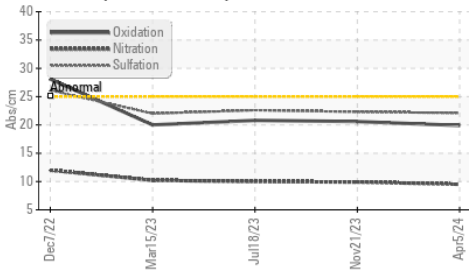

Base Number

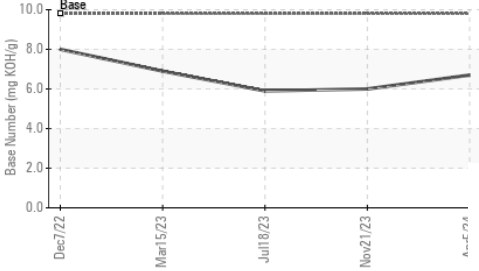

Viscosity @ 100°C

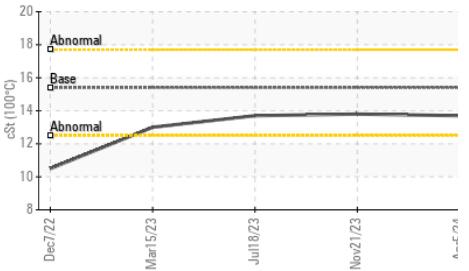


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.8

GRAPHS


Ferrous Alloys

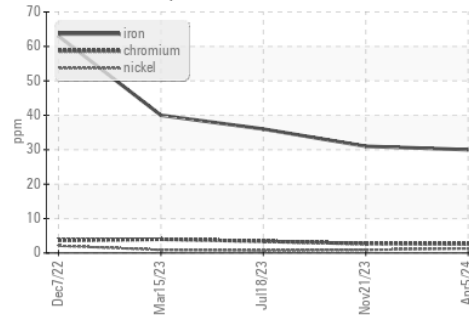


Non-ferrous Metals

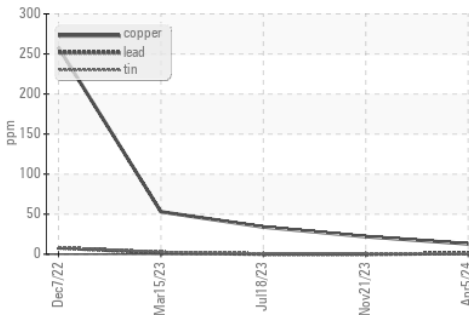

Viscosity @ 100°C

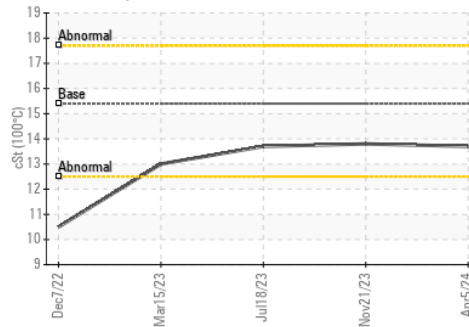

Base Number

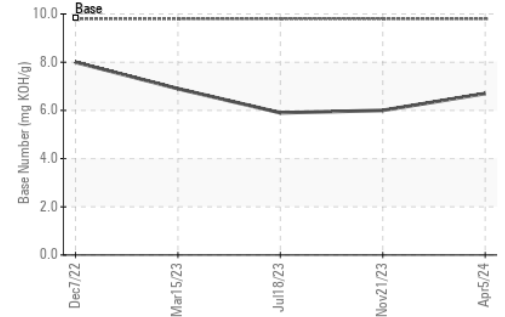

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007005
Lab Number : 06143646
Unique Number : 10968454
Test Package : FLEET

Received : 09 Apr 2024
Tested : 10 Apr 2024
Diagnosed : 10 Apr 2024 - Wes Davis

SCHMIDT TRANSPORTATION - 605449
 108 E Bay Road
 Plattsmouth, NE
 US 68048
 Contact: NICK DOTY
 doty@liquidtrucking.com
 T: (402)949-9398
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)