




# OIL ANALYSIS REPORT

## Sample Rating Trend

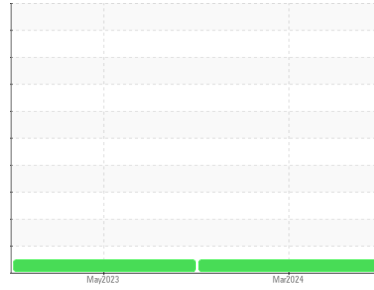

**NORMAL**



Machine Id  
**EX-401**  
 Component  
**Left Swing Drive**  
 Fluid  
**SAE 50W (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0909401</b>	WC0705313	---
Sample Date	Client Info			<b>19 Mar 2024</b>	22 May 2023	---
Machine Age	hrs	Client Info		<b>3784</b>	2781	---
Oil Age	hrs	Client Info		<b>0</b>	2781	---
Oil Changed	Client Info			<b>N/A</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>400	<b>25</b>	22	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	1	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	2	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>12</b>	14	---
Calcium	ppm	ASTM D5185m		<b>2704</b>	2793	---
Phosphorus	ppm	ASTM D5185m		<b>931</b>	929	---
Zinc	ppm	ASTM D5185m		<b>1079</b>	1161	---
Sulfur	ppm	ASTM D5185m		<b>7651</b>	8649	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>15</b>	11	---
Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT

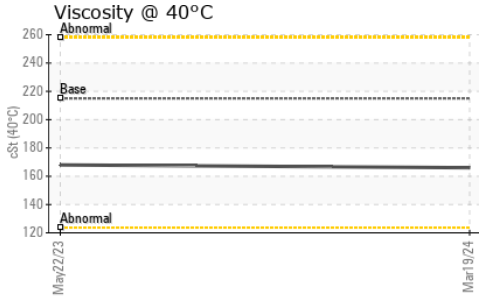




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 215	166	168	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

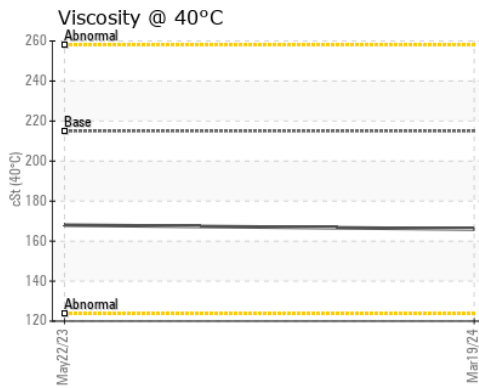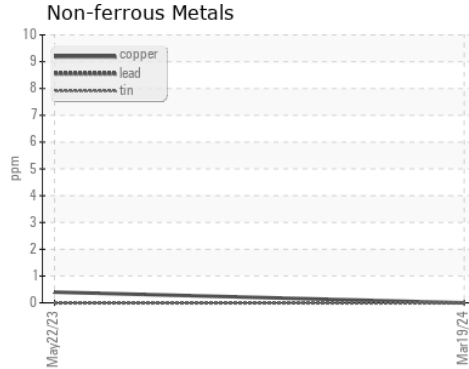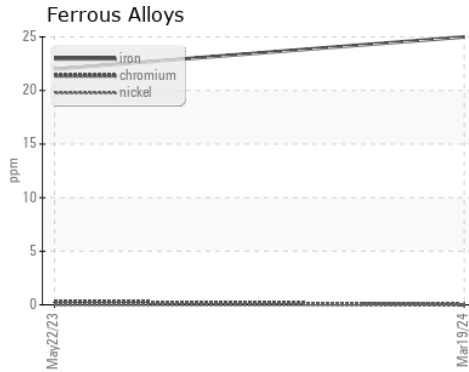

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0909401  
**Lab Number** : 06147783  
**Unique Number** : 10977861  
**Test Package** : FLEET  
**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Don Baldrige

**E.C. PACE CO.**  
 1811 HOLLINS RD.  
 ROANOKE, VA  
 US 24012  
 Contact: EDDIE SECO  
 ESECO@ECPACE.COM  
 T: (276)266-5849  
 F: (540)343-6909

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)