




OIL ANALYSIS REPORT



Area
[22887]
 Machine Id
30-77
 Component
Hydraulic System
 Fluid
CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

Sample Rating Trend

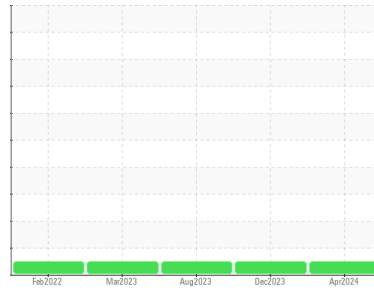

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0836139	WC0836236	WC0802439
Sample Date	Client Info		10 Apr 2024	01 Dec 2023	01 Aug 2023
Machine Age	hrs	Client Info	4653	4238	3625
Oil Age	hrs	Client Info	529	2238	1048
Oil Changed	Client Info		Not Changed	Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.075	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>23	6	4	6
Chromium	ppm	ASTM D5185m	>9	8	8	7
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	4	3	3
Lead	ppm	ASTM D5185m	>28	<1	0	<1
Copper	ppm	ASTM D5185m	>51	9	12	10
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	85	121	18	18
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		2	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	350	773	120	124
Calcium	ppm	ASTM D5185m	1800	1394	315	326
Phosphorus	ppm	ASTM D5185m	1000	1444	658	678
Zinc	ppm	ASTM D5185m	1100	1613	883	931
Sulfur	ppm	ASTM D5185m	3500	5194	1853	2227

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>31	10	7	6
Sodium	ppm	ASTM D5185m	>21	3	<1	0
Potassium	ppm	ASTM D5185m	>20	5	1	2

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>80000	1612	1420	583
Particles >6µm	ASTM D7647	>20000	171	122	120
Particles >14µm	ASTM D7647	>640	8	8	14
Particles >21µm	ASTM D7647	>160	2	2	4
Particles >38µm	ASTM D7647	>40	0	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>23/21/16	18/15/10	18/14/10	16/14/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.69	0.95	0.88




OIL ANALYSIS REPORT

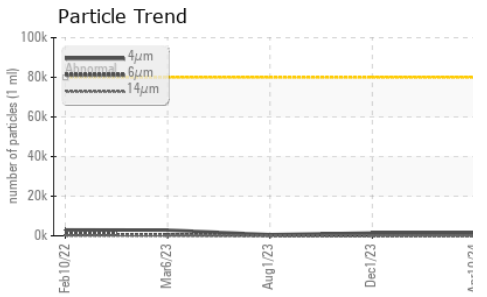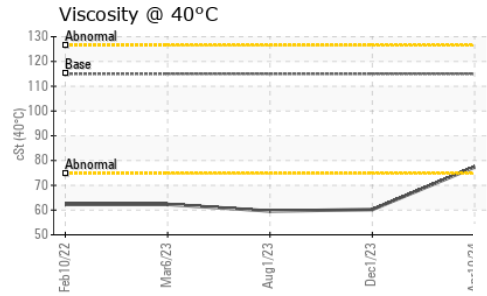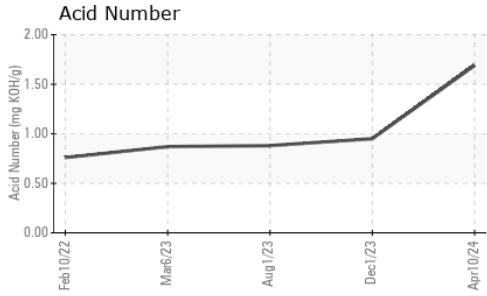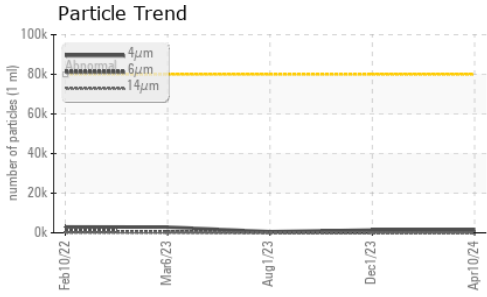






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 115	77.4	60.2	59.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

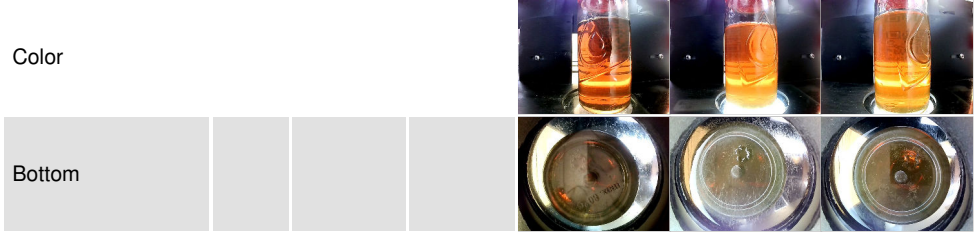

GRAPHS

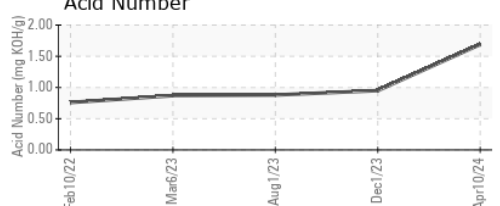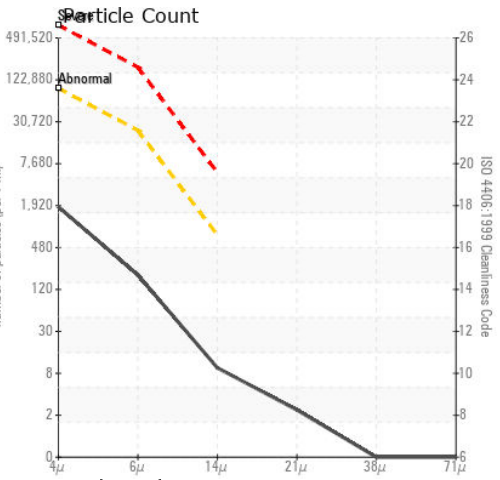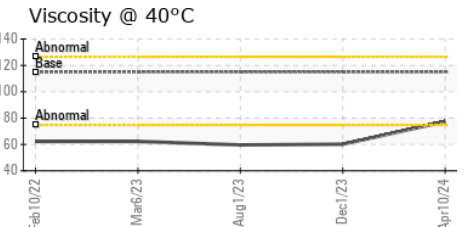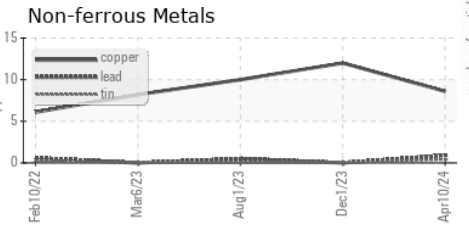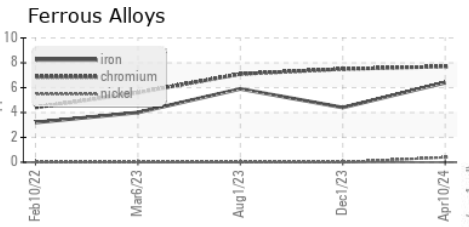

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836139 **Received** : 12 Apr 2024
Lab Number : **06148044** **Tested** : 15 Apr 2024
Unique Number : 10978122 **Diagnosed** : 16 Apr 2024 - Don Baldrige
Test Package : CONST

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)