



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id

**8823676 (S/N 1740)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC111386</b>	---	---
Sample Date	Client Info			<b>29 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2981</b>	---	---
Oil Age	hrs	Client Info		<b>2918</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>12</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m	90	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	90	<b>22</b>	---	---
Calcium	ppm	ASTM D5185m	2	<b>4</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>12</b>	---	---
Zinc	ppm	ASTM D5185m		<b>28</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	---	---
Water	%	ASTM D6304	>0.05	<b>0.009</b>	---	---
ppm Water	ppm	ASTM D6304	>500	<b>90</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>15701</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 4609</b>	---	---
Particles >14µm		ASTM D7647	>80	<b>▲ 244</b>	---	---
Particles >21µm		ASTM D7647	>20	<b>▲ 49</b>	---	---
Particles >38µm		ASTM D7647	>4	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>17/13	<b>▲ 19/15</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.36</b>	---	---

# OIL ANALYSIS REPORT

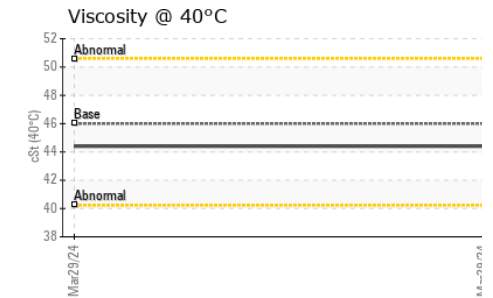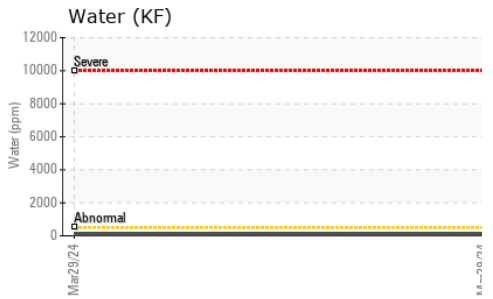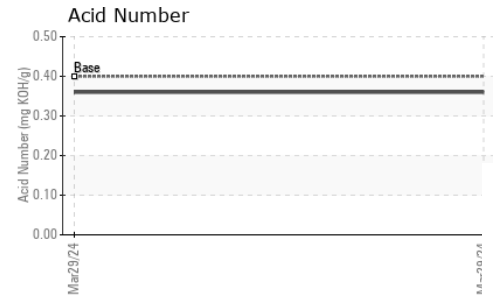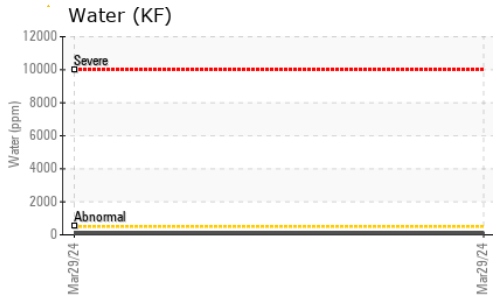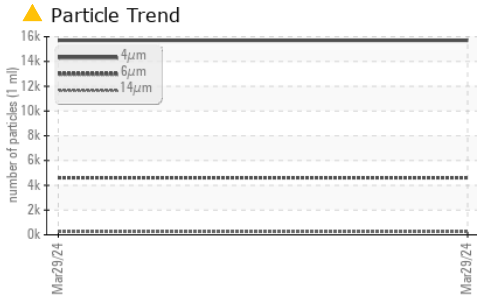






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	<b>44.4</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

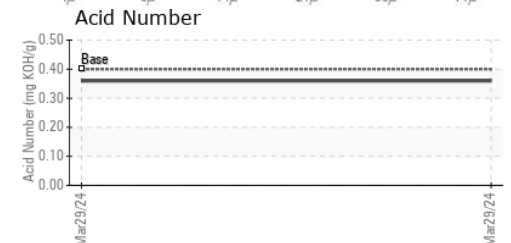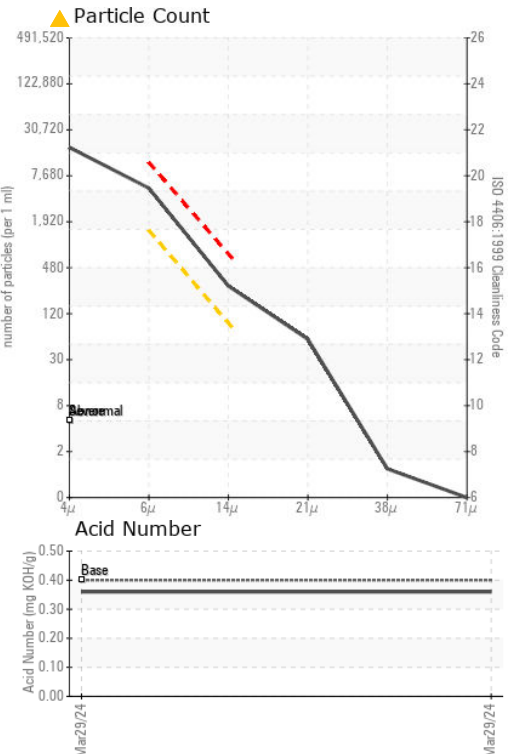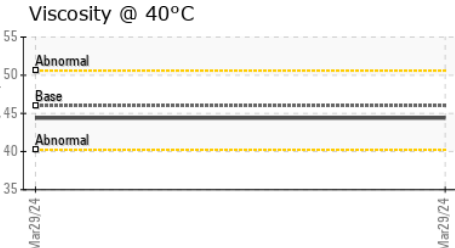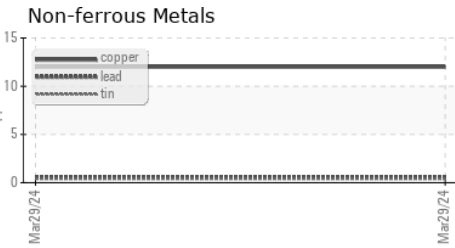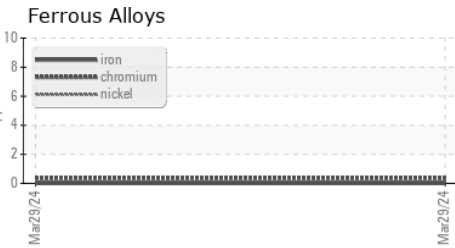

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC111386  
**Lab Number** : 06148102  
**Unique Number** : 10978180  
**Test Package** : IND 2

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Jonathan Hester

**MIKES WOODWORKING INC**  
 397 SPENCER MATTINGLY LN  
 BARDSTOWN, KY  
 US 40004  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: