




# OIL ANALYSIS REPORT

## Sample Rating Trend

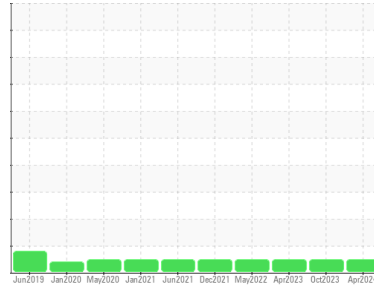

**NORMAL**



Area

## BARRIER DEPARTMENT SAMPLES

Machine Id

### WEB 16 SB

Component

**Gearbox**

Fluid

**TEXACO MEROPA 220 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0913509</b>	WC0806401	WC0757229
Sample Date	Client Info			<b>14 Apr 2024</b>	08 Oct 2023	04 Apr 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>2</b>	2	4
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0.5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	1.1	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	0.1	<b>&lt;1</b>	2	0
Calcium	ppm	ASTM D5185m	1.6	<b>6</b>	9	8
Phosphorus	ppm	ASTM D5185m	159	<b>223</b>	246	266
Zinc	ppm	ASTM D5185m	0.5	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	10342	<b>6398</b>	6468	7687





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>14</b>	18	19
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>1217</b>	6639	772
Particles >6µm		ASTM D7647	>5000	<b>435</b>	1113	239
Particles >14µm		ASTM D7647	>640	<b>54</b>	26	24
Particles >21µm		ASTM D7647	>160	<b>7</b>	5	3
Particles >38µm		ASTM D7647	>40	<b>1</b>	1	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	1	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>17/16/13</b>	20/17/12	17/15/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.19</b>	0.16	0.15




# OIL ANALYSIS REPORT

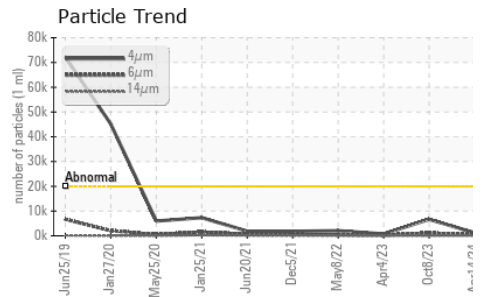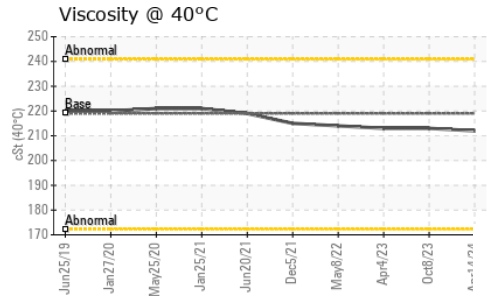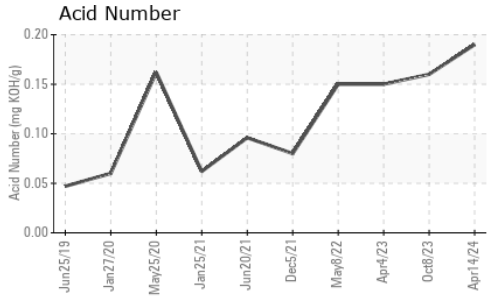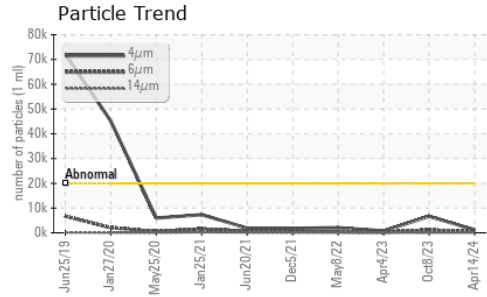






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 219	212	213	213

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

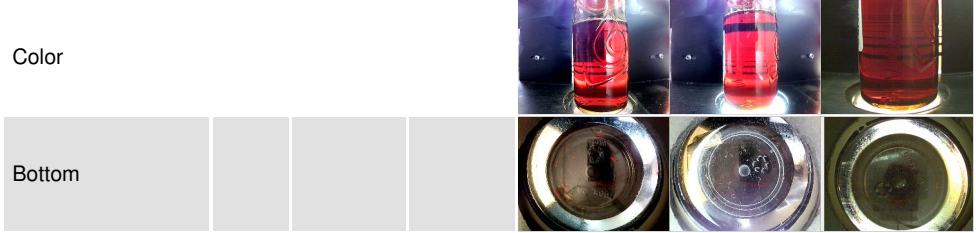

## GRAPHS

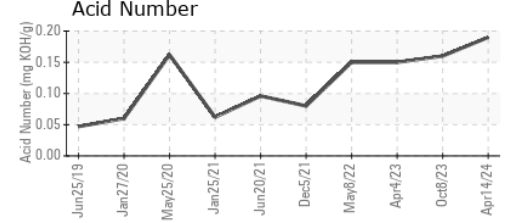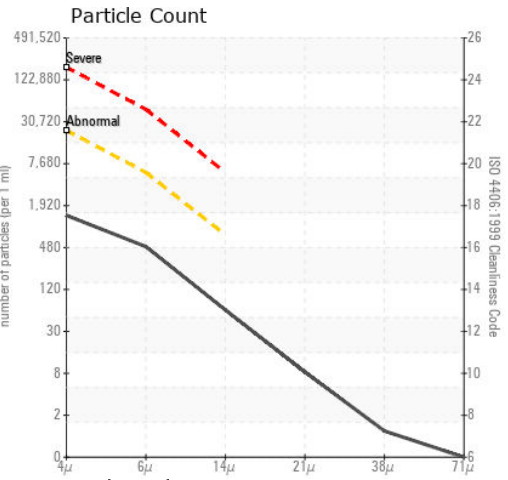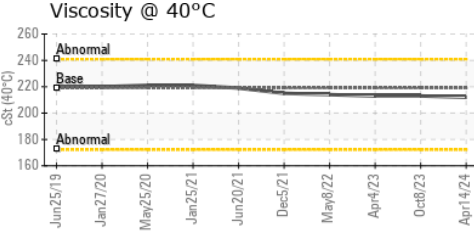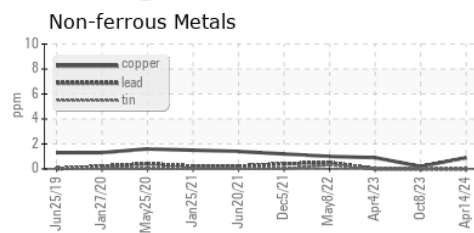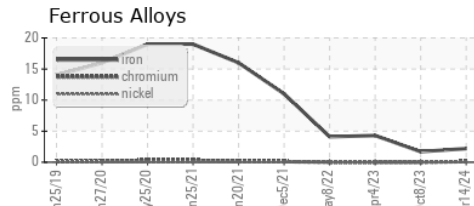

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0913509      **Received** : 15 Apr 2024  
**Lab Number** : **06148674**      **Tested** : 16 Apr 2024  
**Unique Number** : 10978752      **Diagnosed** : 16 Apr 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**SEALED AIR CORP - CRYOVAC DIVISION**  
 1301 WEST MAGNOLIA AVE  
 IOWA PARK, TX  
 US 76367  
 Contact: KEVIN KETCHERSID  
 kevin.a.ketchersid@sealedair.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)