




OIL ANALYSIS REPORT

Sample Rating Trend

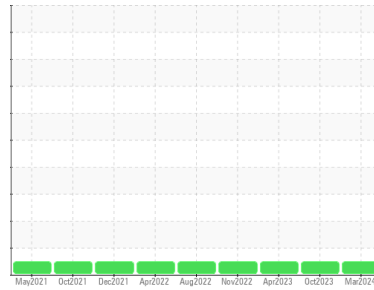

NORMAL



Machine Id

80-232

Component

Diesel Engine

Fluid

CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0766492	WC0818694	WC0818738
Sample Date	Client Info		26 Mar 2024	02 Oct 2023	21 Apr 2023
Machine Age	hrs	Client Info	4331	4019	3680
Oil Age	hrs	Client Info	4331	746	407
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	25	12	11
Chromium	ppm	ASTM D5185m >20	1	<1	<1
Nickel	ppm	ASTM D5185m >4	<1	<1	<1
Titanium	ppm	ASTM D5185m	2	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	6	4	2
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	1	<1	<1
Tin	ppm	ASTM D5185m >15	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	135	112	77
Barium	ppm	ASTM D5185m	0	0	4
Molybdenum	ppm	ASTM D5185m	11	8	46
Manganese	ppm	ASTM D5185m	<1	0	0
Magnesium	ppm	ASTM D5185m 350	993	500	457
Calcium	ppm	ASTM D5185m 1800	2037	1414	1714
Phosphorus	ppm	ASTM D5185m 1000	1669	1102	1157
Zinc	ppm	ASTM D5185m 1100	1799	1153	1282
Sulfur	ppm	ASTM D5185m 3500	6250	4341	4831

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	4	5
Sodium	ppm	ASTM D5185m	7	5	1
Potassium	ppm	ASTM D5185m >20	7	6	4

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	8.0	7.7	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.9	19.1	18.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	12.7	13.5	13.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	8.1	8.5	7.8




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

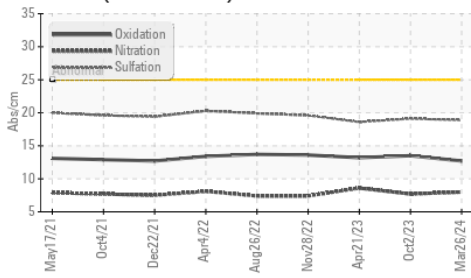

Base Number

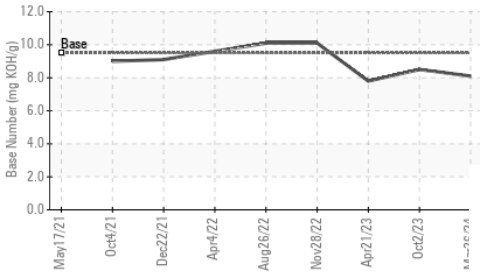

Viscosity @ 100°C

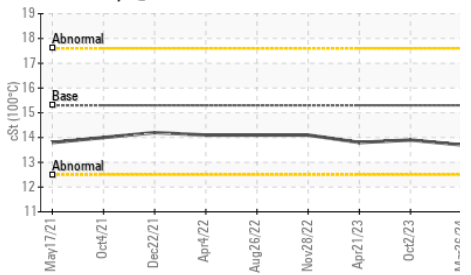


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.3	13.7	13.9

GRAPHS


Ferrous Alloys

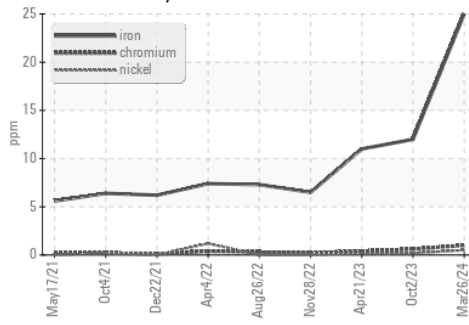


Non-ferrous Metals

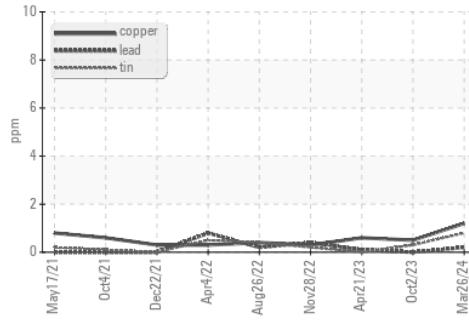

Viscosity @ 100°C

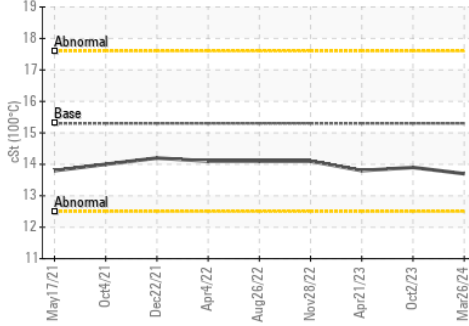

Base Number

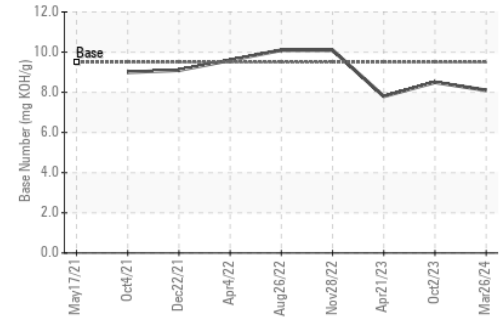

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0766492 Received : 19 Apr 2024
 Lab Number : 06155114 Tested : 24 Apr 2024
 Unique Number : 10990537 Diagnosed : 24 Apr 2024 - Jonathan Hester
 Test Package : CONST (Additional Tests: TBN)

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)