




OIL ANALYSIS REPORT

Sample Rating Trend

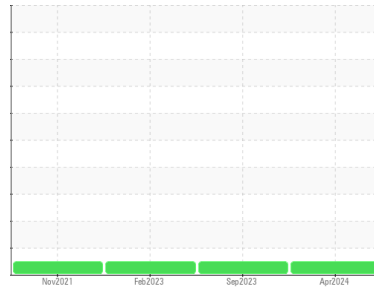

NORMAL



Area
KANSAS/101
 Machine Id
05.81 [KANSAS^101]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0918167	WC0833901	WC0741841
Sample Date	Client Info			15 Apr 2024	20 Sep 2023	08 Feb 2023
Machine Age	mls	Client Info		0	5405	3543
Oil Age	mls	Client Info		0	3543	3543
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	12	38	26
Chromium	ppm	ASTM D5185m	>20	1	3	2
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	11	30	25
Lead	ppm	ASTM D5185m	>40	0	0	1
Copper	ppm	ASTM D5185m	>330	3	3	2
Tin	ppm	ASTM D5185m	>15	<1	1	<1
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	43	29	35
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	39	42	44
Manganese	ppm	ASTM D5185m		2	1	<1
Magnesium	ppm	ASTM D5185m	0	516	525	513
Calcium	ppm	ASTM D5185m		1691	1846	1640
Phosphorus	ppm	ASTM D5185m		780	801	755
Zinc	ppm	ASTM D5185m		925	973	955
Sulfur	ppm	ASTM D5185m		2868	3013	2798




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	9	8
Sodium	ppm	ASTM D5185m		4	7	3
Potassium	ppm	ASTM D5185m	>20	24	67	49

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.6	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.9	13.5	12.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	24.1	22.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.2	29.1	25.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	9.3	6.3	8.5







OIL ANALYSIS REPORT

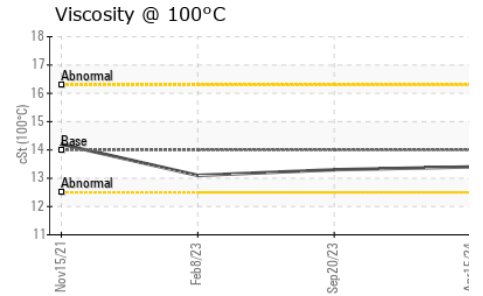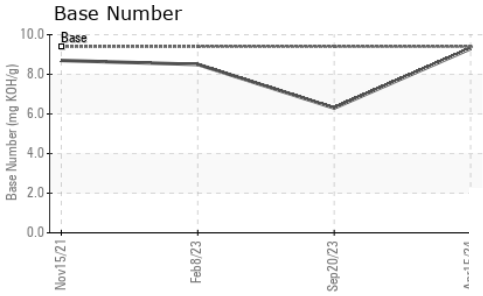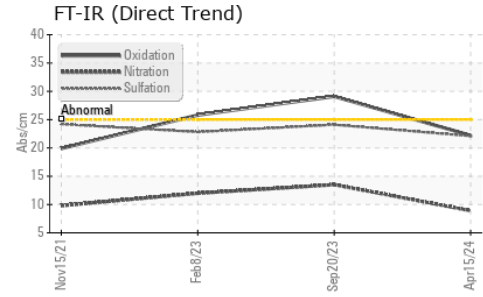

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.4	13.3	13.1

GRAPHS

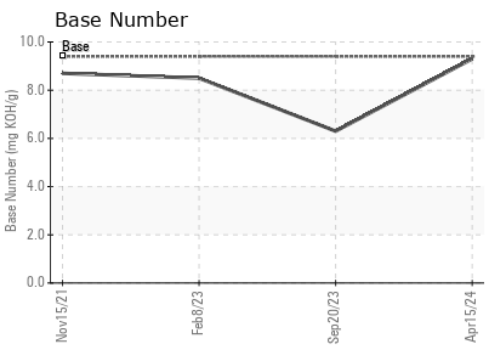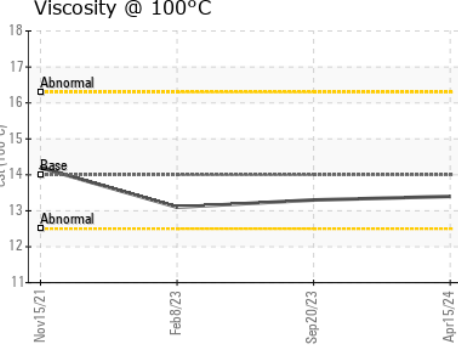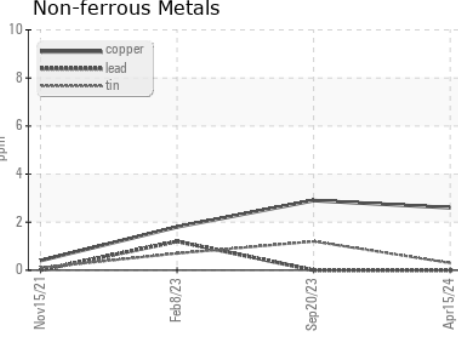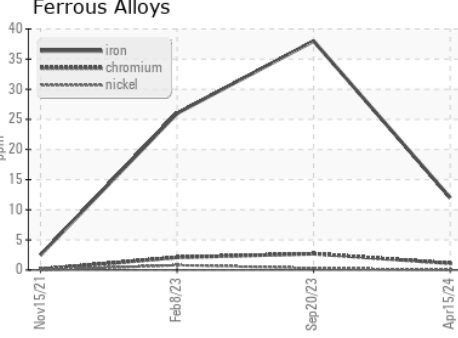

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918167 **Received** : 22 Apr 2024
Lab Number : **06155635** **Tested** : 23 Apr 2024
Unique Number : 10991058 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net
 T: (316)943-6491
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)