




OIL ANALYSIS REPORT

Sample Rating Trend

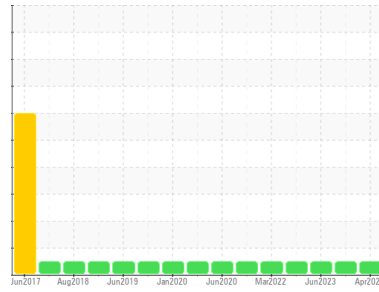

NORMAL



Area
CONSTRUCTORS, INC
 Machine Id
04-0632
 Component
Gasoline Engine
 Fluid
MOBIL SUPER 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			SBP0005762	SBP0005558	SBP0000696
Sample Date	Client Info			11 Apr 2024	13 Dec 2023	29 Jun 2023
Machine Age	hrs	Client Info		8545	8301	7998
Oil Age	hrs	Client Info		244	303	283
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	69	34	41
Chromium	ppm	ASTM D5185m	>20	4	2	2
Nickel	ppm	ASTM D5185m	>5	2	1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	7	6	2
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>155	11	13	13
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		32	20	29
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		73	72	73
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		500	514	523
Calcium	ppm	ASTM D5185m		1200	1191	1251
Phosphorus	ppm	ASTM D5185m		607	707	668
Zinc	ppm	ASTM D5185m		729	804	804
Sulfur	ppm	ASTM D5185m		2838	2685	3294

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	15	12	9
Sodium	ppm	ASTM D5185m	>400	5	2	3
Potassium	ppm	ASTM D5185m	>20	4	3	2


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	12.2	12.5	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	27.2	26.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	21.8	22.4
Base Number (BN)	mg KOH/g	ASTM D2896		4.1	3.1	2.8




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

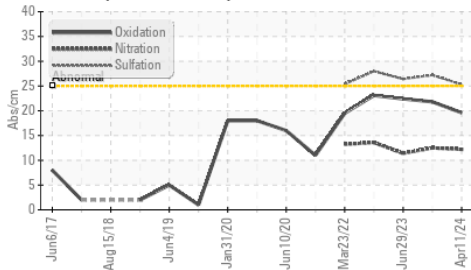

Base Number

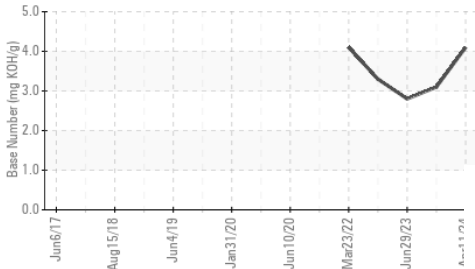

Viscosity @ 100°C

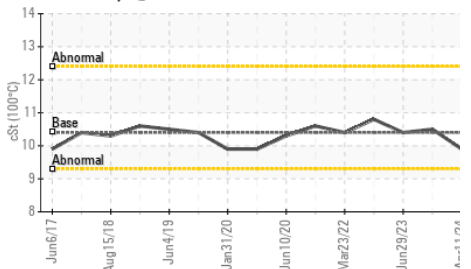


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.4	9.9	10.5

GRAPHS


Ferrous Alloys

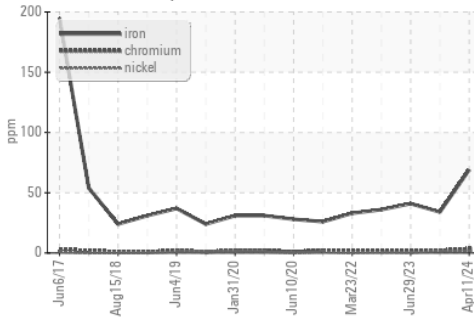


Non-ferrous Metals

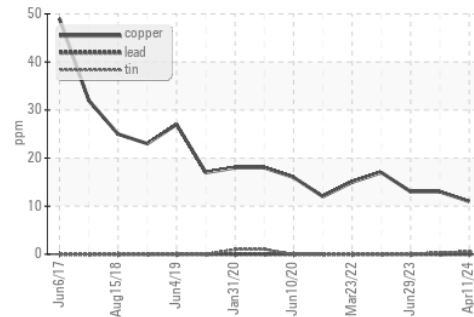

Viscosity @ 100°C

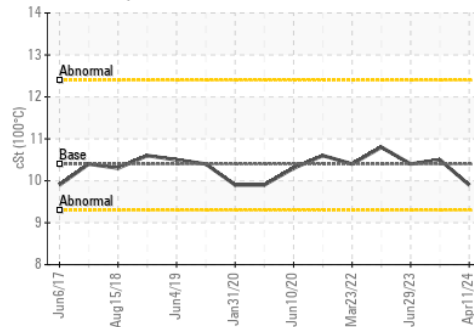

Base Number

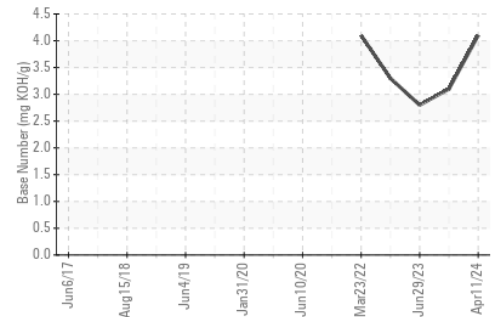

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005762 **Received** : 22 Apr 2024
Lab Number : 06156644 **Tested** : 23 Apr 2024
Unique Number : 10992067 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : FLEET

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Loren Michael
 LorenM@constructorslincoln.com
 T: (402)434-2157
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)