




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/DE- SCRAPER
 Machine Id
74.26 [OKLAHOMA^102^DE- SCRAPER]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

Sample Rating Trend

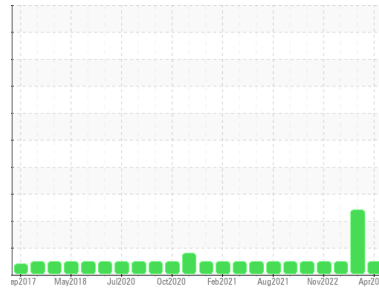

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0886979	WC0821867	WC0758728
Sample Date	Client Info		10 Apr 2024	09 Sep 2023	10 Feb 2023
Machine Age	hrs	Client Info	7890	7735	7520
Oil Age	hrs	Client Info	345	215	243
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	SEVERE	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	▲ 15.5	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	9	4	14
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	<1	<1	0
Aluminum	ppm	ASTM D5185m >25	3	0	<1
Lead	ppm	ASTM D5185m >40	<1	<1	<1
Copper	ppm	ASTM D5185m >330	3	10	4
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	55	43	63
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	40	23	43
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	459	317	500
Calcium	ppm	ASTM D5185m	1549	1272	1768
Phosphorus	ppm	ASTM D5185m	733	593	776
Zinc	ppm	ASTM D5185m	854	710	960
Sulfur	ppm	ASTM D5185m	2619	2620	2742

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	4	4
Sodium	ppm	ASTM D5185m	7	3	1
Potassium	ppm	ASTM D5185m >20	2	2	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.2	0.5
Nitration	Abs/cm	*ASTM D7624 >20	6.8	7.9	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.4	23.4	22.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.1	25.9	20.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	10.1	6.7	9.7




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

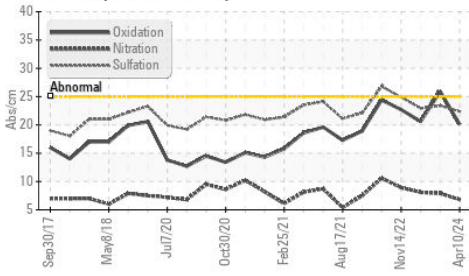

Base Number

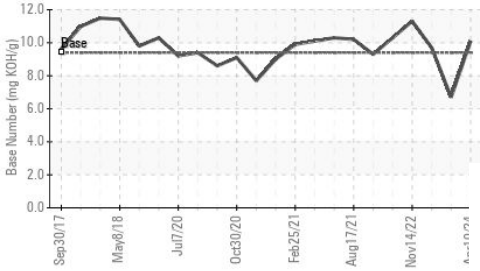

Viscosity @ 100°C

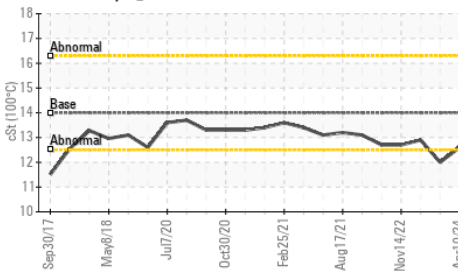


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	12.6	▲ 12.0	12.9

GRAPHS


Ferrous Alloys

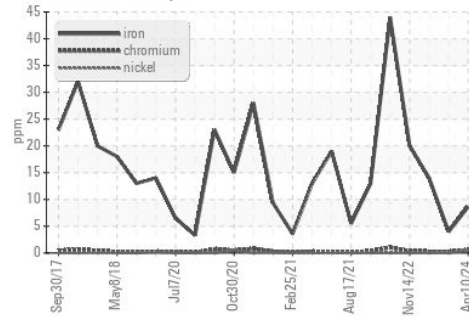


Non-ferrous Metals

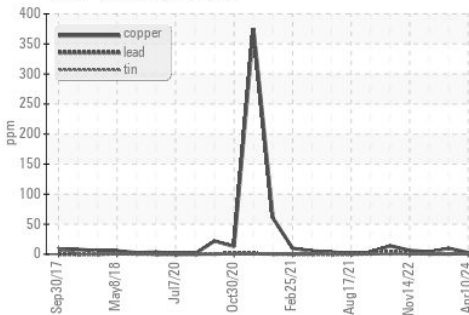

Viscosity @ 100°C

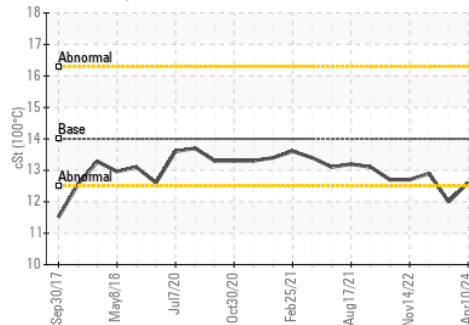

Base Number

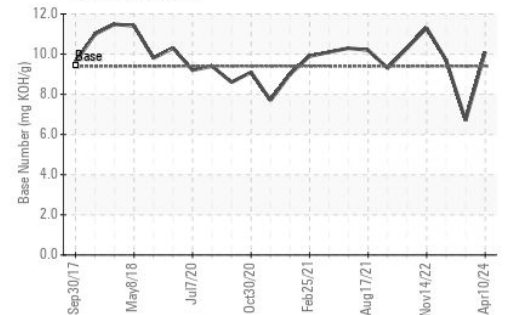

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0886979

Lab Number : 06156660

Unique Number : 10992083

Test Package : CONST (Additional Tests: TBN)

Received : 22 Apr 2024

Tested : 23 Apr 2024

Diagnosed : 23 Apr 2024 - Wes Davis

SHERWOOD CONSTRUCTION CO INC

3219 WEST MAY ST

WICHITA, KS

US 67213

Contact: DOUG KING

doug.king@sherwood.net

T: (316)617-3161

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)