




OIL ANALYSIS REPORT

Area
OKLAHOMA/102/EG - ROLLER/COMPACTOR
 Machine Id
64.35L [OKLAHOMA^102^EG - ROLLER/COMPACTOR]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (13 GAL)

Sample Rating Trend

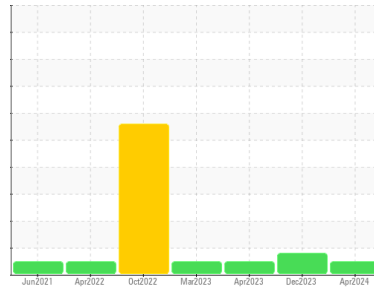

NORMAL

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor. (Customer Sample Comment: 2838 hrs)

Wear
 All component wear rates are normal.

Contamination
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0864438 | WC0864285 | WC0746747 |
| Sample Date | Client Info | | 09 Apr 2024 | 18 Dec 2023 | 24 Apr 2023 |
| Machine Age | hrs | Client Info | 2838 | 2672 | 2222 |
| Oil Age | hrs | Client Info | 1040 | 1040 | 1040 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | ATTENTION | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 22 | 9 | 11 |
| Chromium | ppm | ASTM D5185m >10 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m >10 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >10 | 3 | <1 | <1 |
| Lead | ppm | ASTM D5185m >10 | <1 | <1 | 0 |
| Copper | ppm | ASTM D5185m >75 | 11 | 7 | 7 |
| Tin | ppm | ASTM D5185m >10 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 11 | 12 | 11 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 1 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 12 | 14 | 13 |
| Calcium | ppm | ASTM D5185m | 1936 | 2044 | 1955 |
| Phosphorus | ppm | ASTM D5185m | 892 | 891 | 749 |
| Zinc | ppm | ASTM D5185m | 1046 | 1069 | 916 |
| Sulfur | ppm | ASTM D5185m | 3646 | 3206 | 3131 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >20 | 6 | 5 | 5 |
| Sodium | ppm | ASTM D5185m | 0 | 3 | <1 |
| Potassium | ppm | ASTM D5185m >20 | 3 | <1 | 0 |

FLUID CLEANLINESS





| | method | limit/base | current | history1 | history2 |
|-----------------|------------------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 13242 | 18341 | 1240 |
| Particles >6µm | ASTM D7647 >2500 | | 379 | 3635 | 236 |
| Particles >14µm | ASTM D7647 >640 | | 23 | 134 | 22 |
| Particles >21µm | ASTM D7647 >160 | | 5 | 26 | 5 |
| Particles >38µm | ASTM D7647 >40 | | 0 | 1 | 0 |
| Particles >71µm | ASTM D7647 >10 | | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >--/18/16 | | 21/16/12 | 21/19/14 | 17/15/12 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.00 | 0.89 | 1.00 |




OIL ANALYSIS REPORT

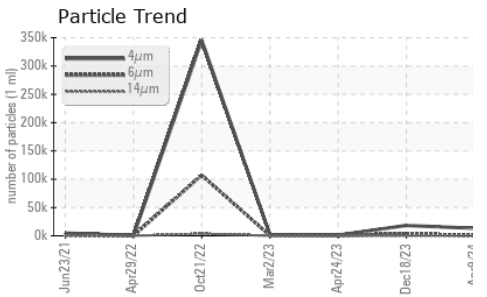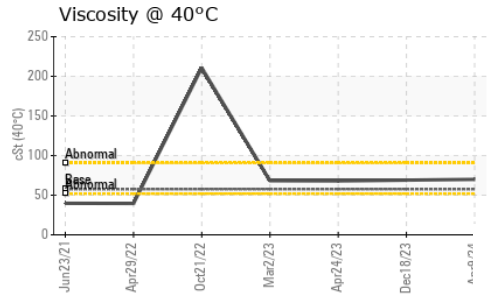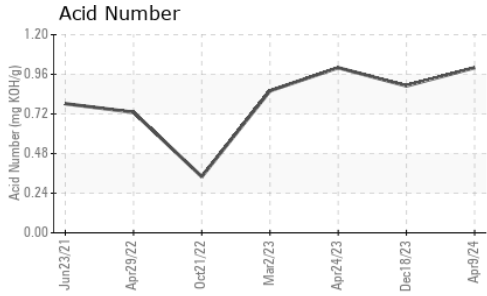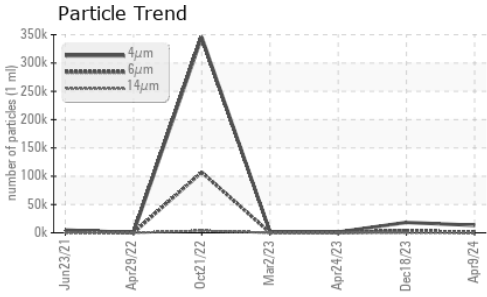






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 57.6 | 70.0 | 69.0 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

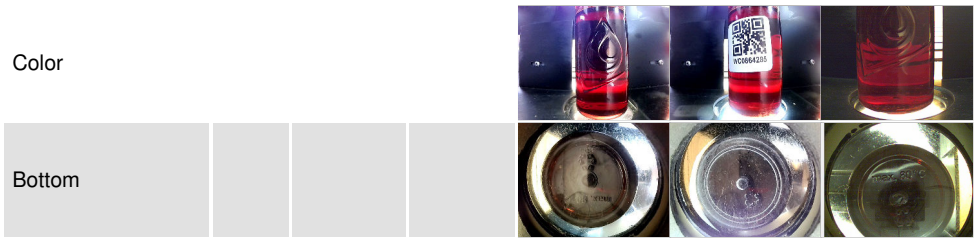

GRAPHS

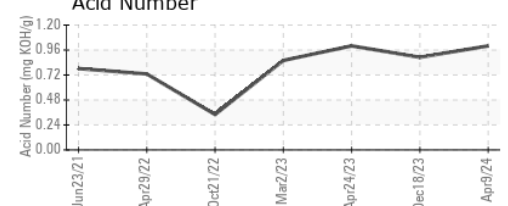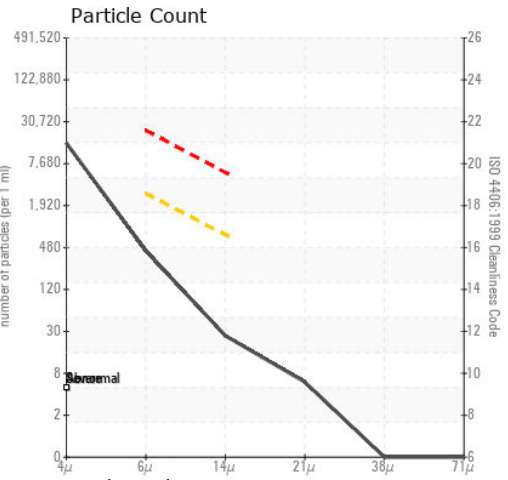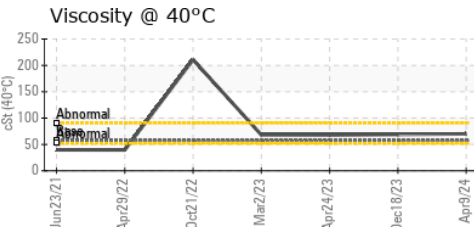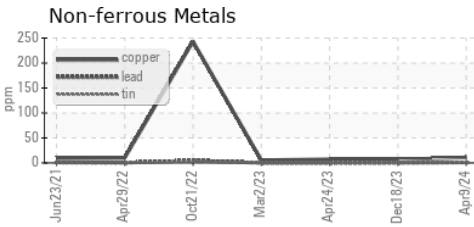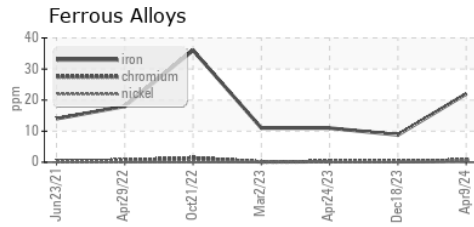

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864438
Lab Number : 06156867
Unique Number : 10992290
Test Package : CONST
Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 24 Apr 2024 - Angela Borella

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)