

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area
EMPE
Machine Id
P210-10-1059 (S/N V605)
Component
Hydraulic System
Fluid
TULCO LUBSOIL SUPER HYDRAULIC AW 68 (200 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO50002031	---	---
Sample Date	Client Info	17 Apr 2024	---	---
Machine Age	hrs Client Info	5534	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	Not Changed	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<1	---	---
Chromium ppm ASTM D5185m	>20	0	---	---
Nickel ppm ASTM D5185m	>20	0	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>20	0	---	---
Lead ppm ASTM D5185m	>20	<1	---	---
Copper ppm ASTM D5185m	>20	16	---	---
Tin ppm ASTM D5185m	>20	0	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		0	---	---
Manganese ppm ASTM D5185m		<1	---	---
Magnesium ppm ASTM D5185m		83	---	---
Calcium ppm ASTM D5185m		79	---	---
Phosphorus ppm ASTM D5185m	425	330	---	---
Zinc ppm ASTM D5185m	500	411	---	---
Sulfur ppm ASTM D5185m	1900	2117	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	6	---	---
Sodium ppm ASTM D5185m		2	---	---
Potassium ppm ASTM D5185m	>20	2	---	---
Water % ASTM D6304	>0.05	0.011	---	---
ppm Water ppm ASTM D6304	>500	116	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	2170	---	---
Particles >6µm ASTM D7647	>1300	408	---	---
Particles >14µm ASTM D7647	>160	23	---	---
Particles >21µm ASTM D7647	>40	3	---	---
Particles >38µm ASTM D7647	>10	0	---	---
Particles >71µm ASTM D7647	>3	0	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	18/16/12	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.7	0.37	---	---

OIL ANALYSIS REPORT

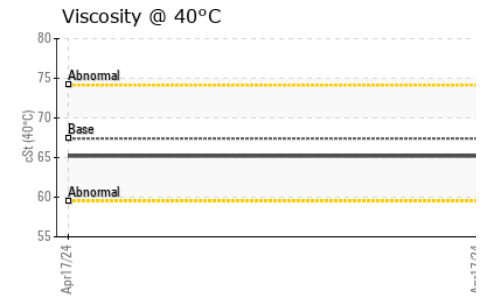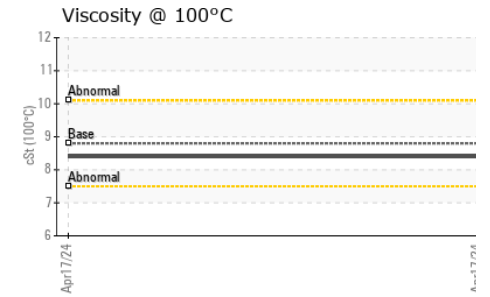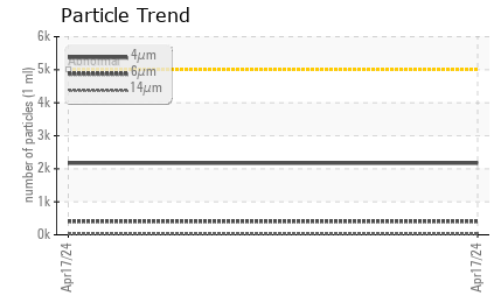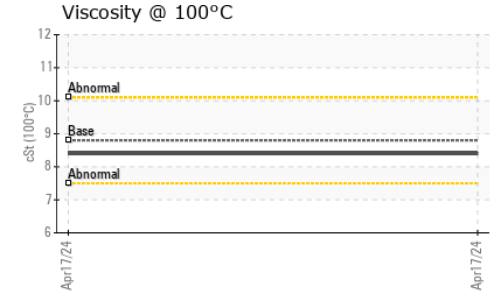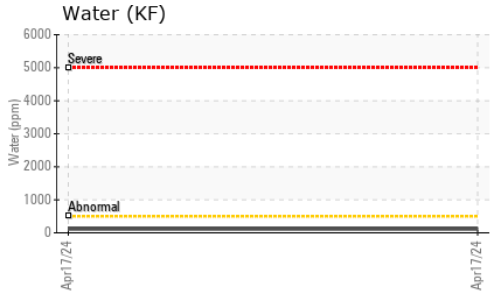




VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67.4	65.2	---	---
Visc @ 100°C	cSt	ASTM D445	8.8	8.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	97	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

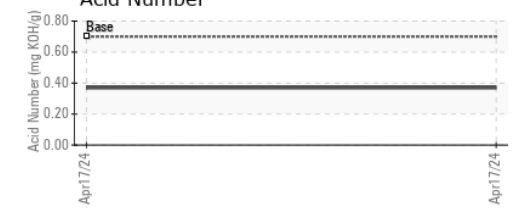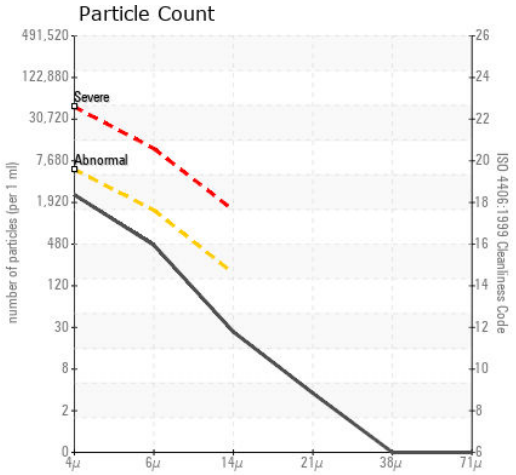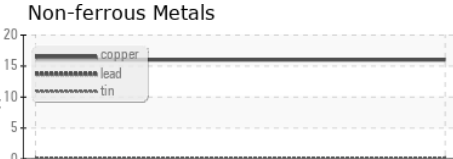

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50002031 **Received** : 25 Apr 2024
Lab Number : **06160933** **Tested** : 26 Apr 2024
Unique Number : 10996356 **Diagnosed** : 26 Apr 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

JAMAK FABRICATION
 1401 NORTH BOWIE DRIVE
 WEATHERFORD, TX
 US 76086
 Contact: LARRY NORRIS
 lano@jamak.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)