




OIL ANALYSIS REPORT

Sample Rating Trend

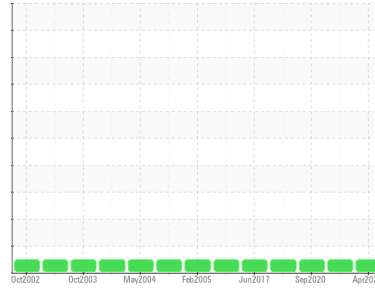

NORMAL



Machine Id
GEMINI MARTA PERRY 2 (S/N C5495 A/B)
 Component
Compressor
 Fluid
HP CYLINDER LIFE 150 COMPRESSOR OIL (48 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: HP CYLINDER LIFE 150 - OIL)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0923569	RP201234	RP195127
Sample Date	Client Info			30 Apr 2024	24 Sep 2020	24 Sep 2020
Machine Age	hrs	Client Info		35710	26688	26688
Oil Age	hrs	Client Info		3191	1136	1136
Oil Changed	Client Info			Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	8	1	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>25	1	<1	0
Copper	ppm	ASTM D5185m	>50	2	2	2
Tin	ppm	ASTM D5185m	>15	1	0	<1
Antimony	ppm	ASTM D5185m		---	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	11
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	1	0
Calcium	ppm	ASTM D5185m		161	200	192
Phosphorus	ppm	ASTM D5185m		504	2	3
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		24913	16088	15618

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	2	0	0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.24	0.232	0.236



OIL ANALYSIS REPORT


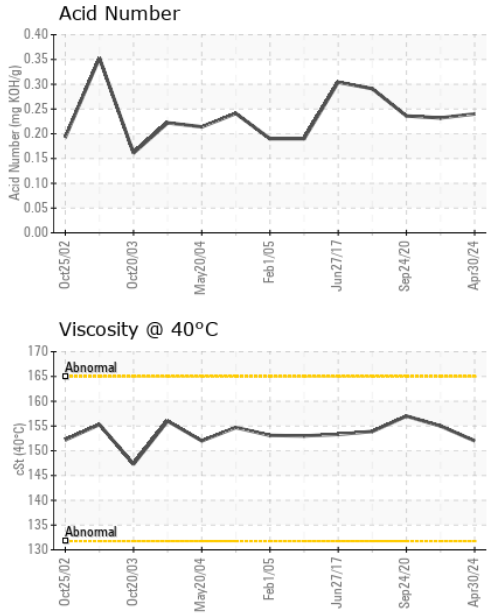


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	152	155	157

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

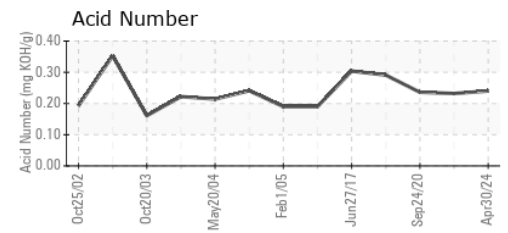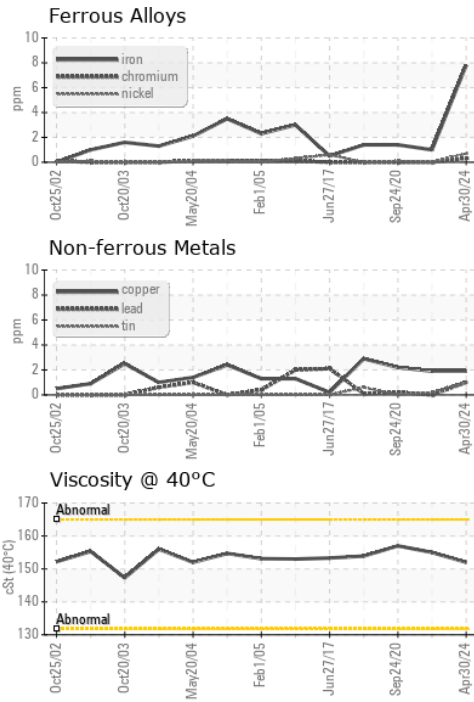

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0923569 **Received** : 09 May 2024
Lab Number : **06173980** **Tested** : 10 May 2024
Unique Number : 11020033 **Diagnosed** : 13 May 2024 - Don Baldrige
Test Package : IND 2

ATLANTA GAS LIGHT CO.
 550 GEORGIA HWY 138 DEPT 1580
 RIVERDALE, GA
 US 30274
 Contact: PATRICK GAREIS
 PGGAREIS@SOUTHERNCO.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)