




OIL ANALYSIS REPORT

Sample Rating Trend

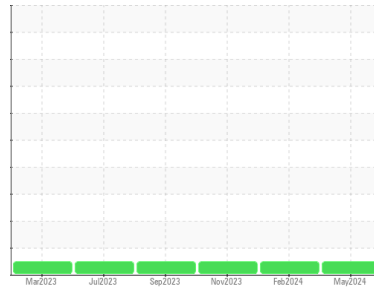

NORMAL



Area
HPU17
 Machine Id
HTS42
 Component
Hydraulic System
 Fluid
ESSO HYJET IV-A PLUS (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0896083	WC0896063	WC0817742
Sample Date	Client Info			06 May 2024	13 Feb 2024	13 Nov 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	<1	0	0
Copper	ppm	ASTM D5185m	>20	0	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	3
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m	110	132	114	119
Phosphorus	ppm	ASTM D5185m	37	26986	30819	30222
Zinc	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m	220	222	299	293






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	<1	1
Sodium	ppm	ASTM D5185m		4	7	6
Potassium	ppm	ASTM D5185m	>20	36	30	33
Water	%	ASTM D6304	>0.750	0.483	0.463	0.544
ppm Water	ppm	ASTM D6304	>7500	4830	4630	5440

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	736	103	117
Particles >6µm		ASTM D7647	>1300	171	45	56
Particles >14µm		ASTM D7647	>160	25	6	11
Particles >21µm		ASTM D7647	>40	9	2	2
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	14/13/10	14/13/11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.04	0.131	0.241	0.261




OIL ANALYSIS REPORT

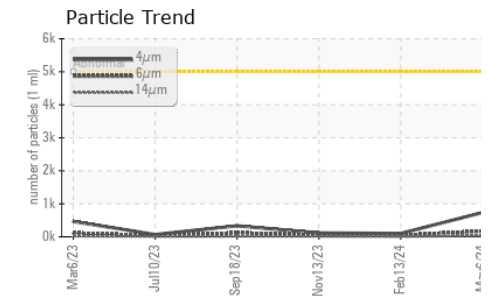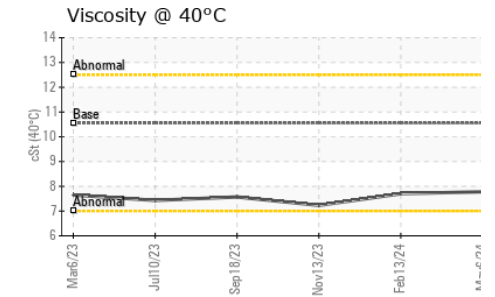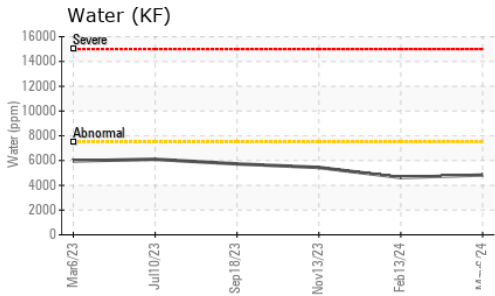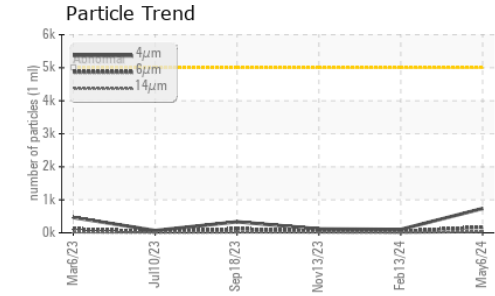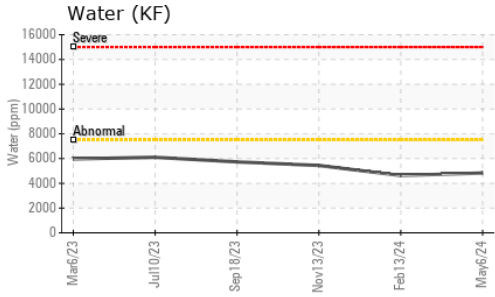





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.750	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Specific Gravity		*ASTM D1298	.996	1.000	0.999	1.000
Visc @ 40°C	cSt	ASTM D445	10.55	7.78	7.7	7.23

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

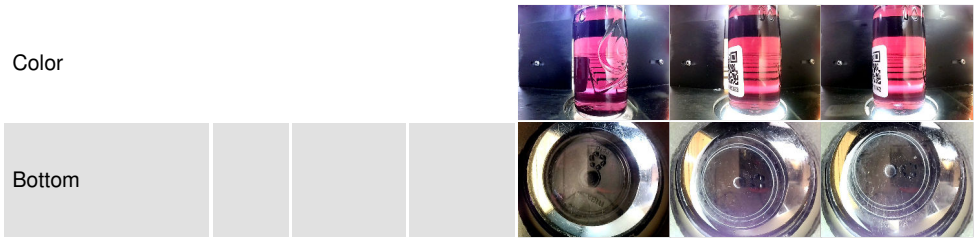

GRAPHS

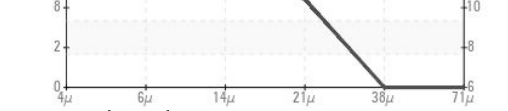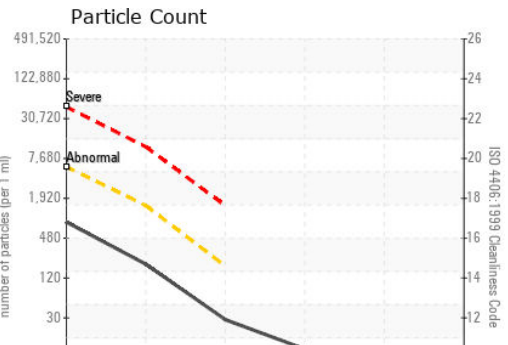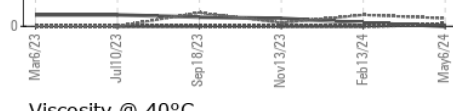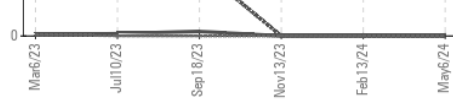

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0896083 **Received** : 09 May 2024
Lab Number : **06174540** **Tested** : 13 May 2024
Unique Number : 11020593 **Diagnosed** : 13 May 2024 - Angela Borella
Test Package : IND 2 (Additional Tests: KF, SpecGravity)

PARKER AEROSPACE
 2010 WALDROP INDUSTRIAL BLVD
 DUBLIN, GA
 US 31021
 Contact: TRENT MCADAMS
 trent.mcadams@parker.com
 T: (478)275-4030
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)