




# OIL ANALYSIS REPORT

Area  
**KANSAS/44/EG - OTHER SERVICE**  
 Machine Id  
**63.03 [KANSAS^44^EG - OTHER SERVICE]**  
 Component  
**Transmission (Manual)**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

Sample Rating Trend

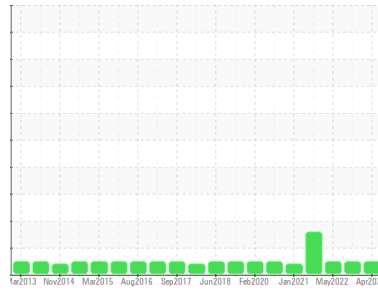

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0914445</b>	WC0862702	WC0697594
Sample Date	Client Info		<b>29 Apr 2024</b>	16 Nov 2023	24 May 2022
Machine Age	hrs	Client Info	<b>15550</b>	13432	12681
Oil Age	hrs	Client Info	<b>1000</b>	2262	11208
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>4</b>	9	10
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>225	<b>0</b>	4	4
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>44</b>	21	40
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>11</b>	12	12
Calcium	ppm	ASTM D5185m		<b>3090</b>	2414	2926
Phosphorus	ppm	ASTM D5185m		<b>1046</b>	967	1004
Zinc	ppm	ASTM D5185m		<b>1193</b>	1080	1231
Sulfur	ppm	ASTM D5185m		<b>5504</b>	3954	4581

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>125	<b>5</b>	5	5
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	1

## VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



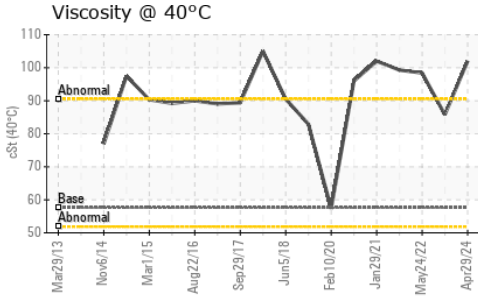


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.6	<b>102</b>	85.8	98.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

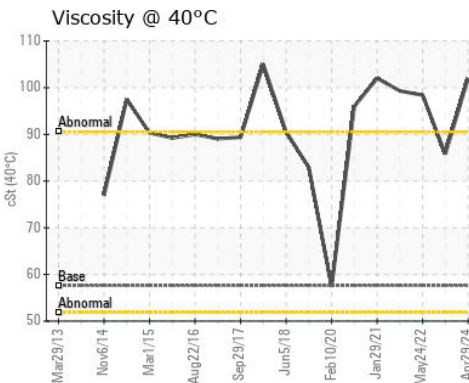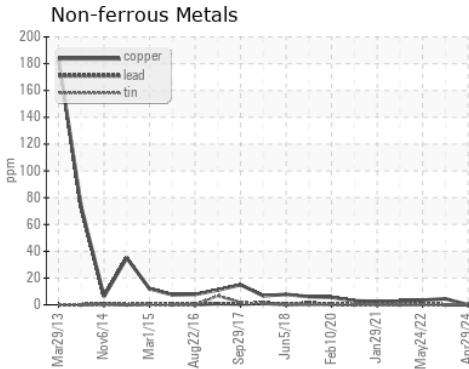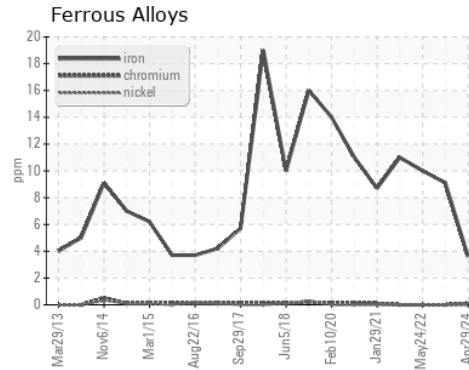

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0914445  
**Lab Number** : **06174810**  
**Unique Number** : 11020863  
**Test Package** : CONST

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Sean Felton

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)