



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
PELLET MILL
 Component
Tank Gearbox
 Fluid
PM 220 (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PE0001496	---	---
Sample Date	Client Info			09 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				ABNORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	---	---






WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		36	---	---
Iron	ppm	ASTM D5185m	>200	12	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>50	1	---	---
Copper	ppm	ASTM D5185m	>200	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		<1	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		14	---	---
Calcium	ppm	ASTM D5185m		262	---	---
Phosphorus	ppm	ASTM D5185m		1474	---	---
Zinc	ppm	ASTM D5185m		1808	---	---
Sulfur	ppm	ASTM D5185m		5650	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	49	---	---
Sodium	ppm	ASTM D5185m		1	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ 245892	---	---
Particles >6µm		ASTM D7647	>5000	▲ 101749	---	---
Particles >14µm		ASTM D7647	>640	▲ 4666	---	---
Particles >21µm		ASTM D7647	>160	▲ 825	---	---
Particles >38µm		ASTM D7647	>40	25	---	---
Particles >71µm		ASTM D7647	>10	2	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 25/24/19	---	---

OIL ANALYSIS REPORT

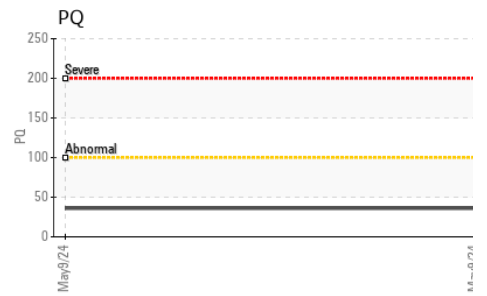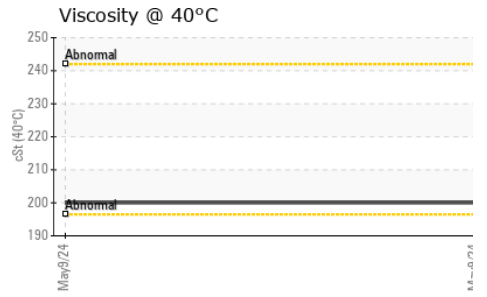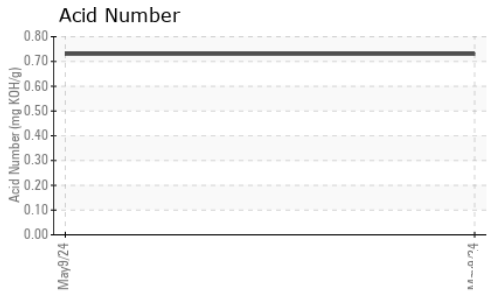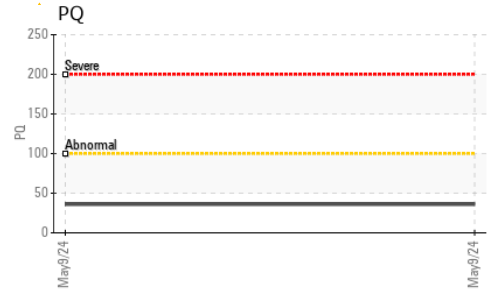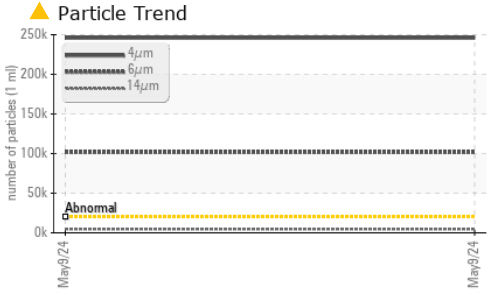

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.73	---	---


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		200	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

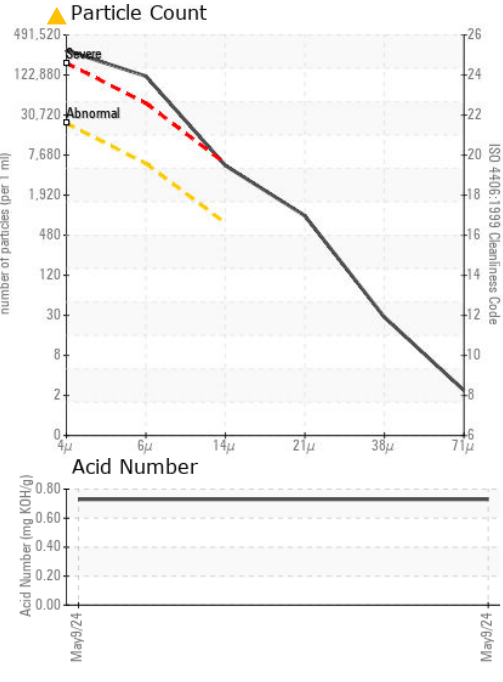

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0001496 **Received** : 10 May 2024
Lab Number : **06175341** **Tested** : 16 May 2024
Unique Number : 11021394 **Diagnosed** : 16 May 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN)

MANKE LUMBER
 1717 MARINE VIEW DR
 TACOMA, WA
 US 98422
 Contact: CHUCK KEGG
 chuckk@mankelumber.com
 T: (360)426-0411
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)