




OIL ANALYSIS REPORT

Sample Rating Trend

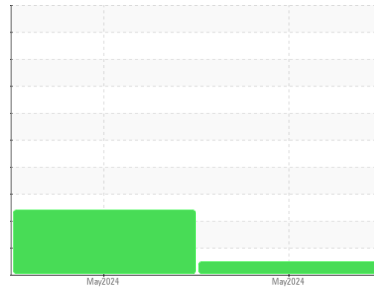

NORMAL



Machine Id
CHEVROLET 2024 Chevy Tahoe 3.0L Duramax
 Component
Diesel Engine
 Fluid
HIGH PERFORMANCE LUBRICANTS HP SAE 5W20 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			HPL0004423	HPL0004422	---
Sample Date	Client Info			05 May 2024	04 May 2024	---
Machine Age	mls	Client Info		3050	3000	---
Oil Age	mls	Client Info		50	3000	---
Oil Changed	Client Info			Not Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7	38	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	6	---
Aluminum	ppm	ASTM D5185m	>20	3	4	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	2	10	---
Tin	ppm	ASTM D5185m	>15	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
Cadmium	ppm	ASTM D5185m		<1	<1	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		106	40	---
Barium	ppm	ASTM D5185m		2	3	---
Molybdenum	ppm	ASTM D5185m		71	27	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m		876	15	---
Calcium	ppm	ASTM D5185m		1167	1781	---
Phosphorus	ppm	ASTM D5185m		798	879	---
Zinc	ppm	ASTM D5185m		821	927	---
Sulfur	ppm	ASTM D5185m		6720	2202	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	23	▲ 104	---
Sodium	ppm	ASTM D5185m		0	2	---
Potassium	ppm	ASTM D5185m	>20	3	5	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.9	7.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.6	15.6	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	30.0	11.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		12.54	7.90	---









OIL ANALYSIS REPORT

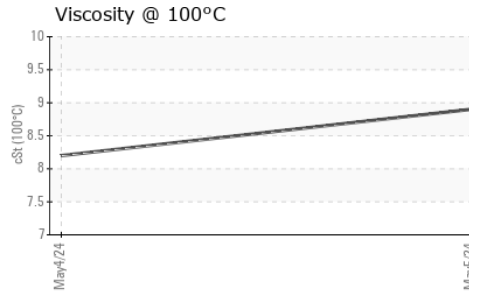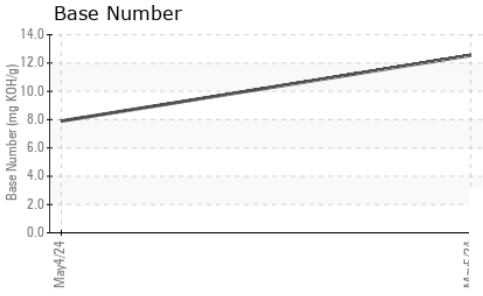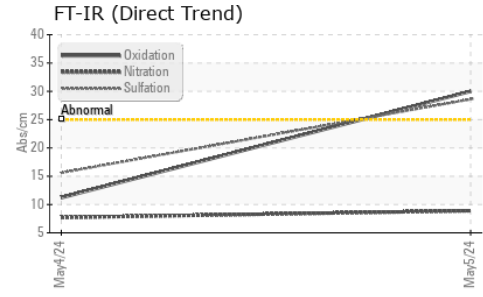

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	8.9	8.2	---

GRAPHS

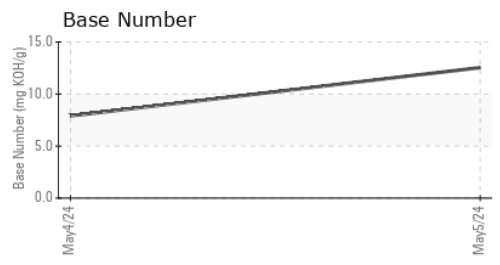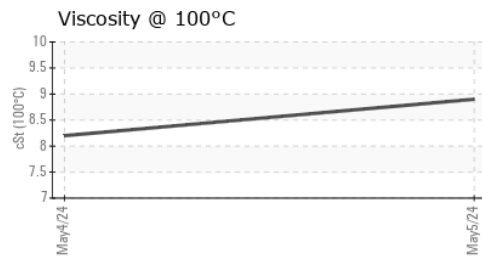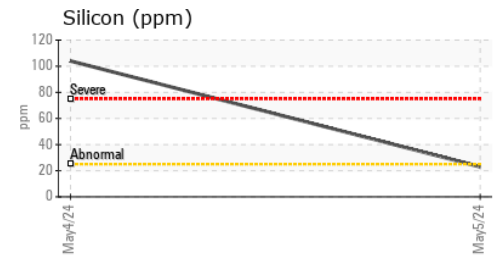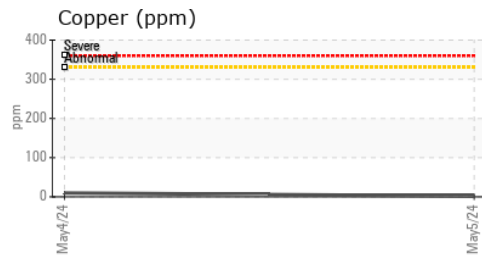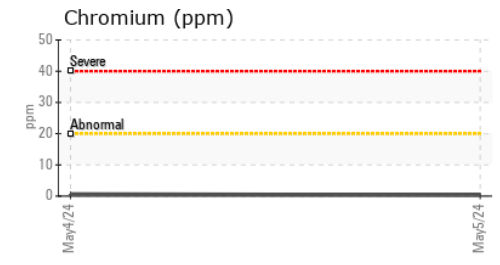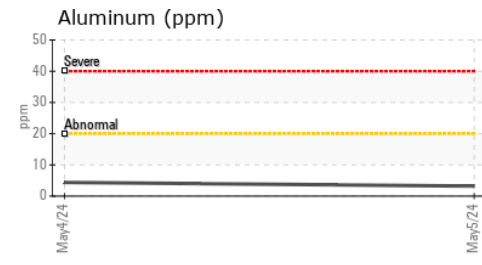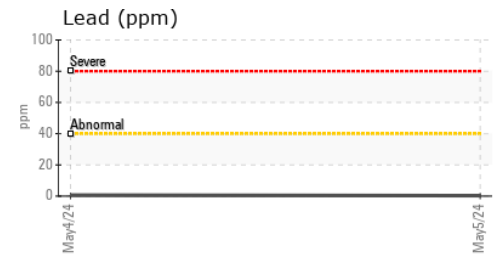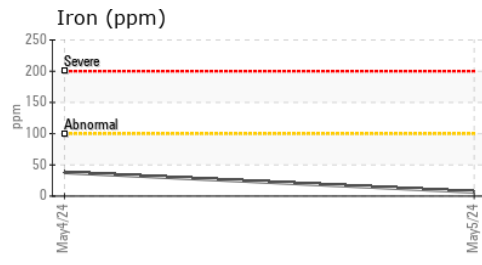

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0004423 **Received** : 13 May 2024
Lab Number : **06177383** **Tested** : 14 May 2024
Unique Number : 11023436 **Diagnosed** : 14 May 2024 - Angela Borella
Test Package : MOB 2

WAYNE WILLSON
 2100 STONECREST DRIVE
 FORT COLLINS, CO
 US 80521
 Contact: WAYNE WILLSON
 wayne.willson@gmail.com
 T: (630)399-0850
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)