


OIL ANALYSIS REPORT



Machine Id

KAESER CSD 75 8465127 (S/N 1339)

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017303		
Sample Date		Client Info		07 May 2024		
Machine Age	hrs	Client Info		658		
Oil Age	hrs	Client Info		658		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	22		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	78		
Calcium	ppm	ASTM D5185m	0	3		
Phosphorus	ppm	ASTM D5185m	0	4		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	22994		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		12		
Potassium	ppm	ASTM D5185m	>20	11		
Water	%	ASTM D6304	>0.05	0.029		
ppm Water	ppm	ASTM D6304	>500	300		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		6844		
Particles >6µm		ASTM D7647	>1300	<u>2081</u>		
Particles >14µm		ASTM D7647	>80	113		
Particles >21µm		ASTM D7647	>20	23		
Particles >38µm		ASTM D7647	>4	1		
Particles >71μm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	0 20/18/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	1/011/	ACTM DODAE	4.0	0.20		


Acid Number (AN)

mg KOH/g ASTM D8045 1.0

0.39



OIL ANALYSIS REPORT

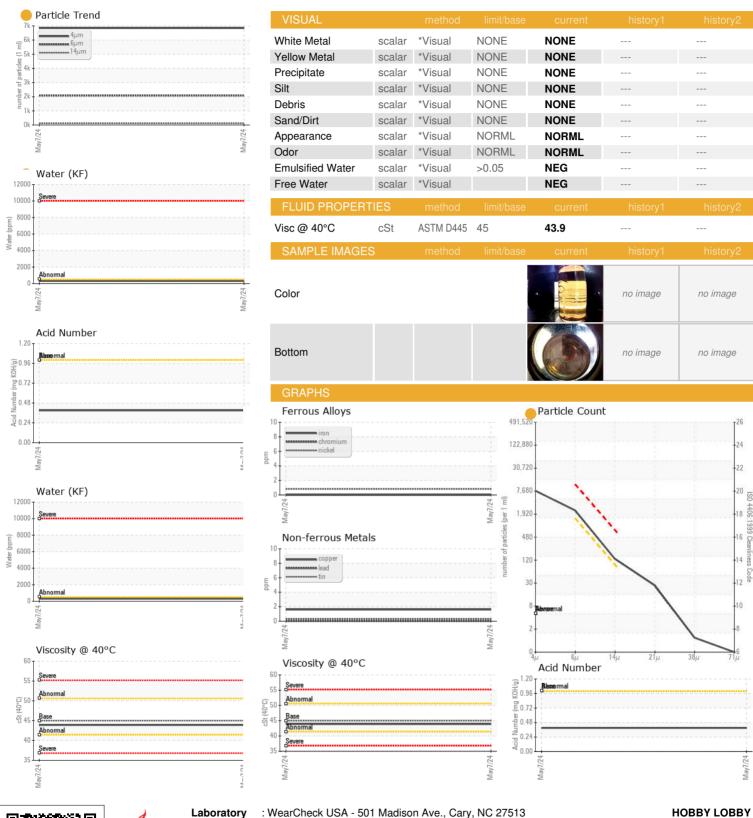





Certificate 12367

Laboratory Sample No.

: KCPA017303 Lab Number : 06179453 Unique Number : 11030779

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 14 May 2024 **Tested**

: 17 May 2024 Diagnosed : 17 May 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: KF, PrtCount)

7707 SW 44TH ST OKLAHOMA CITY, OK US 73179 Contact: JEFF LEWIS JEFF.LEWIS@HOBBYLOBBY.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: