

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

### Area METRO METRO 25008 Component

Rear Differential Fluid {not provided} (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0934536		
Sample Date		Client Info		02 Feb 2024		
Machine Age	mls	Client Info		11		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	6		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	<1		
Copper	ppm	ASTM D5185m	>100	<1		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		320		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		1714		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		29920		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	3		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>.2	0.042		
ppm Water	ppm	ASTM D6304	>2000	420		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	28901		
Particles >6µm		ASTM D7647	>5000	<mark> </mark> 5224		
Particles >14µm		ASTM D7647	>640	313		
Particles >21µm		ASTM D7647	>160	81		
Particles >38µm		ASTM D7647	>40	4		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>e</b> 22/20/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		2.61		




# **OIL ANALYSIS REPORT**





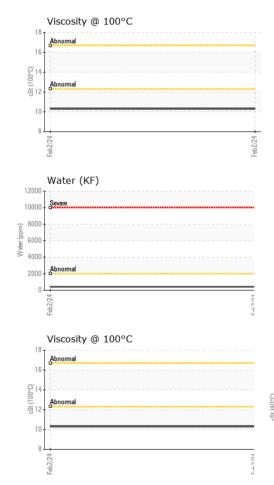

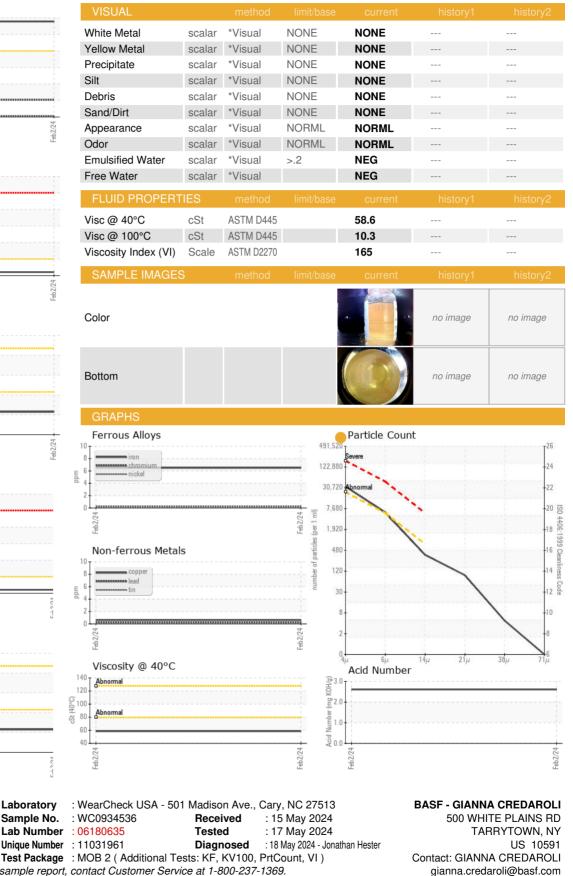

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: bastarhd [WUSCAR] 06180635 (Generated: 05/18/2024 16:40:03) Rev: 1

Certificate 12367

Laboratory

Sample No.

Lab Number

Contact/Location: GIANNA CREDAROLI - BASTARHD

T:

F: